


The surface finish is made of recycled rubber with a smooth yet slip resistant finish with good grip and excellent durability. Logos, agility and functional zone markings can be in-laid in to the surface for maximum effectiveness and usability.







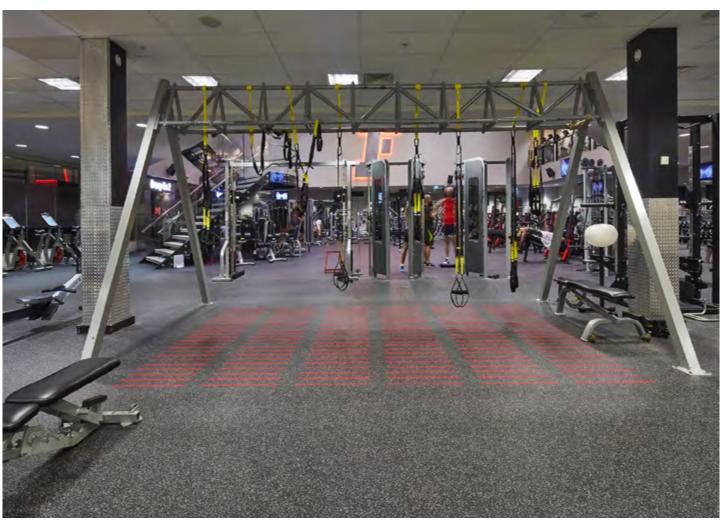

WWW.REPHOUSE.COM

## Specifications.




Property	Standard	Result
Thickness		8 - 30 mm
Size		1000 mm x 1000 mm
Shore Hardness	ASTM D 2240	60°
Resilience	DIN 18032-2	49%
Tear Strength Top Layer	ASTM D 624	0.97 MPa
Tear Strength Base Layer	ASTM D 624	0.70 MPa
Taber Abrasion	ASTM C 504	0.53 gr
Remaining Indentation	DIN 53960	0.07 mm
Flammability	EN 13501-1	E <sub>n</sub>
Coefficient of Friction	ASTM D 2047-97	Dry: 1.10 Wet: 1.03

## All in one, easily installed format.

Neoflex<sup>TM</sup> 500 Series REPtiles are supplied in 1m x 1m tiles, that are easy to install.




without graphics



with graphics

## Standard Colors.

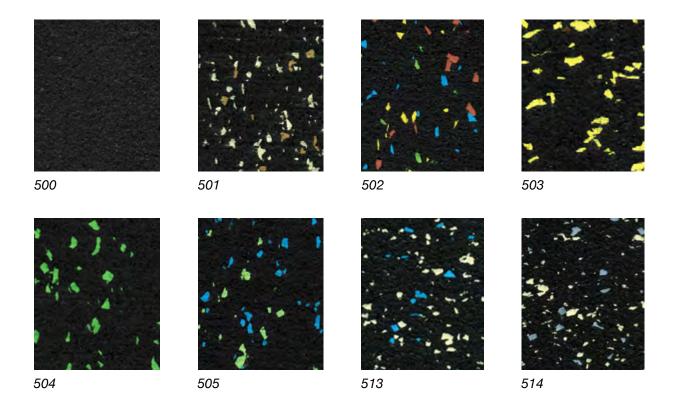

## A Selection of Standard Colors For real samples, contact ust

