

Neoflex™ 600 Series
REPTile



NEOFLEX
FITNESS FLOORING



Performance can take many forms. The most beautiful is presented here.


Neoflex™ 600 Series REPTiles are dual-durometer rubber tiles, 1m x 1m in size, available from 8 - 30 mm thick. Available in any Neoflex 600 Series color, Neoflex™ 600 Series REPTiles are a terrific choice for cardio areas, freestyle areas or suspension training activities.

The surface finish is made of synthetic EPDM rubber with an “orange-peel” like finish for good grip and excellent durability. Logos, agility and functional zone markings can be in-laid in to the surface for maximum effectiveness and usability.

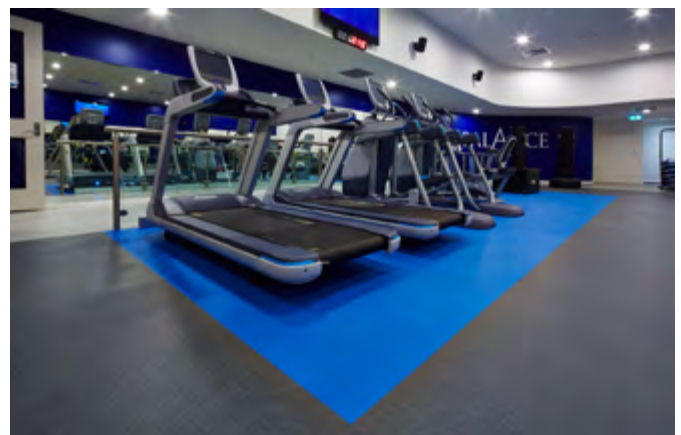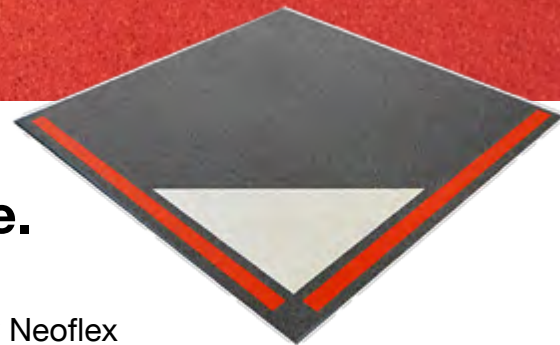



Specifications.

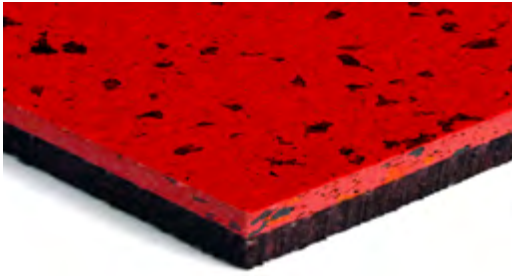

Property	Standard	Result
Thickness		8 - 30 mm
Size		1000 mm x 1000 mm
Shore Hardness	ASTM D 2240	60°
Resilience	DIN 18032-2	40%
Tear Strength Top Layer	ASTM D 624	1.25 MPa
Tear Strength Base Layer	ASTM D 624	0.70 MPa
Taber Abrasion	ASTM C 504	0.66 gr
Remaining Indentation	DIN 53960	0.05 mm
Flammability	EN 13501-1	C _{fl} -s1
Coefficient of Friction	ASTM D 2047-97	Dry: 1.03 Wet: 0.97

All in one, easily installed format.

Neoflex™ 600 Series REtiles are supplied in 1m x 1m tiles, that are easy to install.




without graphics



with graphics


Standard Colors.




633



634



635




636




665




675




696



699




600-005




600-008




600-009




600-010




600-012




600-015



600-019




600-020




600-101




600-102




600-107



600-111




600-112



600-114



600-115



600-116




600-117



600-118



600-119



600-120

A Selection of Standard Colors

For real samples, contact us!