


On The Right Track.

Neoflex[™] D10 Modular Sprint Tracks have an impressive combination of exceptional performance and all-round everyday functionality. Meaning that even outside of competition, this athletic floor will exceed every expectation.

With its pre-fabricated 2-layer system, it provides a comfortable, wear resistant running surface while also maintaining useability and resilence in an indoor environment. Available in 10 standard colors, Neoflex™ D10 performance is exceptional.


Test Description	Test Method	Result
Force Reduction @ +40°C	DIN 18035-6	20%
Tensile Strength	DIN 18035-6	0.97 N/mm²
Elongation at Break	DIN 18035-6	46%
Deformation Modulus	DIN 18035-6	4.7 N/mm ₂
Standard Deformation	DIN 18035-6	0.64 mm
Sliding Coefficient	DIN 18035-6	Dry: 0.86 Wet: 0.63
Indentation Behaviour	DIN 18035-6	When loaded: 2.4 mm Remaining: 0.18 mm
Abrasion Resistance	DIN 18035-6	rV = 6.8

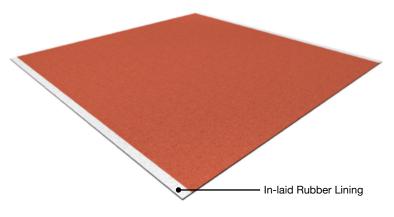

Tile Size: 1000 mm x 1000 mm

Thickness 10mm


Standard Colors



Red




Signal Green



Capri Blue




Brown




Telegray




Greer



Blue



Earth Yellow



Gray



Black

