




On The Right Track.

Neoflex™ D6 Modular Sprint Tracks have an impressive combination of exceptional performance and all-round everyday functionality. Meaning that even outside of competition, this athletic floor will exceed every expectation.


With its pre-fabricated 2-layer system, it provides a comfortable, wear resistant running surface while also maintaining useability and resilience in an indoor environment. Available in 10 standard colors, Neoflex™ D6 performance is exceptional.

Test Description	Test Method	Result
Force Reduction @ +40°C	DIN 18035-6	12%
Tensile Strength	DIN 18035-6	1.24 N/mm ²
Elongation at Break	DIN 18035-6	48%
Deformation Modulus	DIN 18035-6	4.7 N/mm ₂
Standard Deformation	DIN 18035-6	0.31 mm
Sliding Coefficient	DIN 18035-6	Dry: 0.86 Wet: 0.63
Indentation Behaviour	DIN 18035-6	When loaded: 1.2 mm Remaining: 0.11 mm
Abrasion Resistance	DIN 18035-6	rV = 6.8

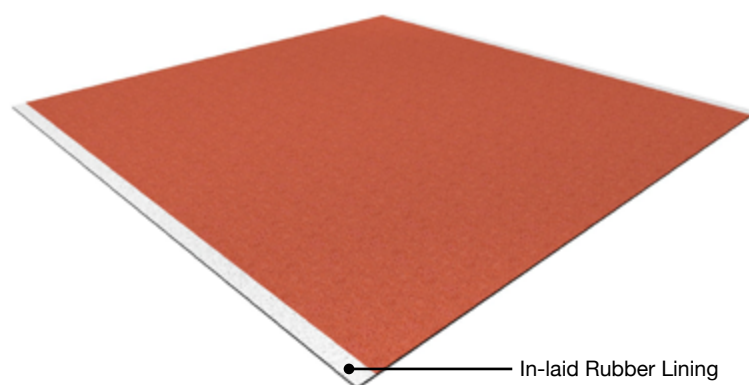


Tile Size: 1000 mm x 1000 mm
Thickness 6mm


Standard Colors

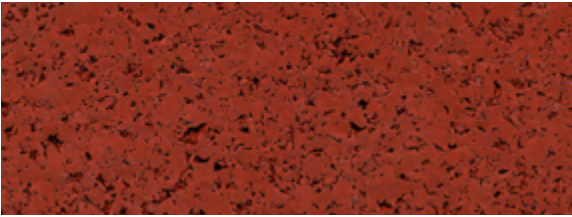


Red

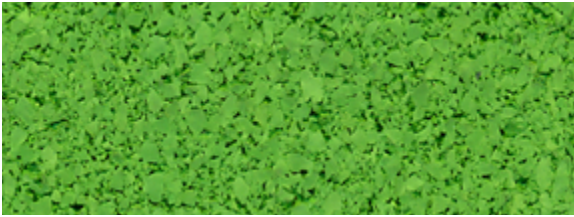

Green

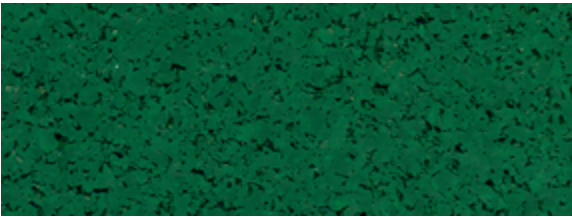


Signal Green

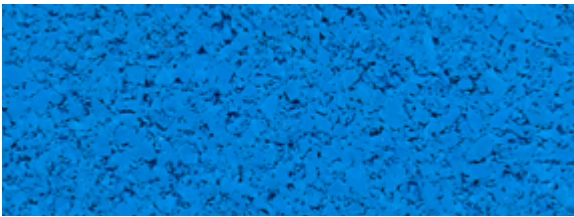


Blue




Capri Blue

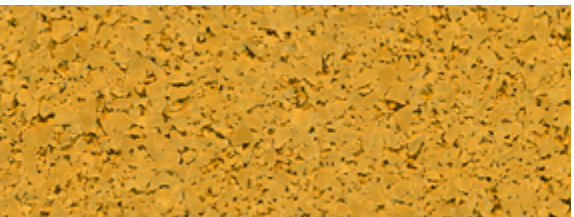


Earth Yellow

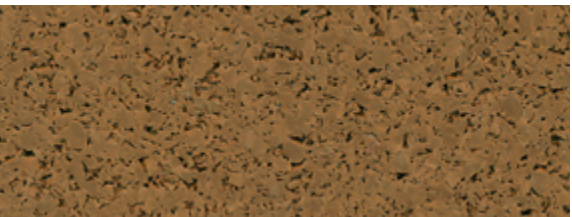


Brown

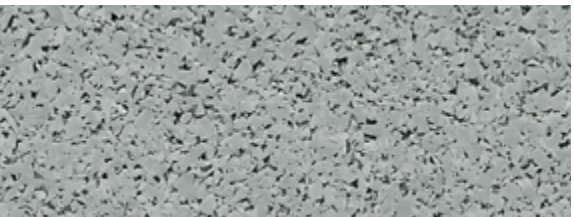

Gray

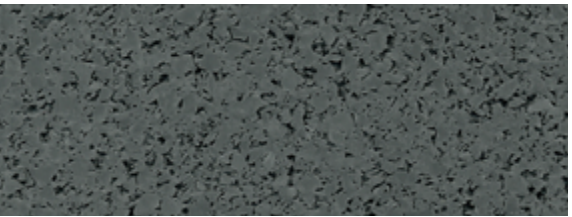

Telegray

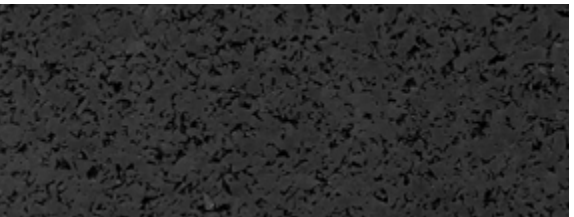

Black



Standard Colors

Other colors available by request