



RUBBER FLOORING
IN PLANKS

NEOFLEX
STRATUS
SERIES

Neoflex Stratus Series.

Neoflex™ Stratus Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor commercial settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.


Neoflex Rubber Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.



Color
488 RF15 NG16

Thickness
6 mm

Installation
Random

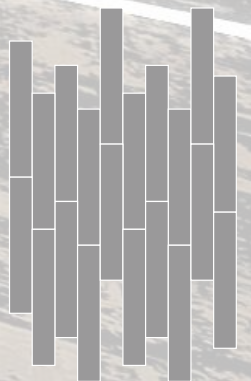




Color
488 RF06 NG07

Thickness
2.5 mm

Installation
Random

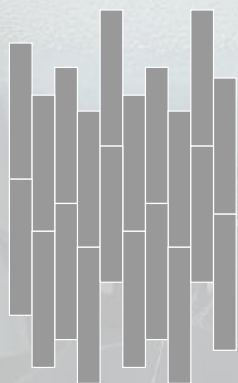

Inspired by Nature.

Inspired by the stratus cloud showing convective activity in layers of colors, and designed to evoke a modern, contemporary, urban aesthetic.

Neoflex Stratus Series showcases exquisite color combinations across its 28 colorways, giving the floor a strong presence that is at once both dramatic, yet reassuring.



Fit for Purpose.

Neoflex Stratus Series is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.


It does not dent or crack when subjected to impacts and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.



Color
488 RF20 NG07

Thickness
6 mm

Installation
Random


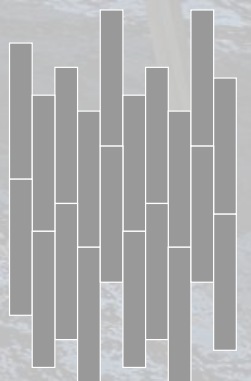




Color
488 RF16 NG06

Thickness
6 mm


Installation
Random

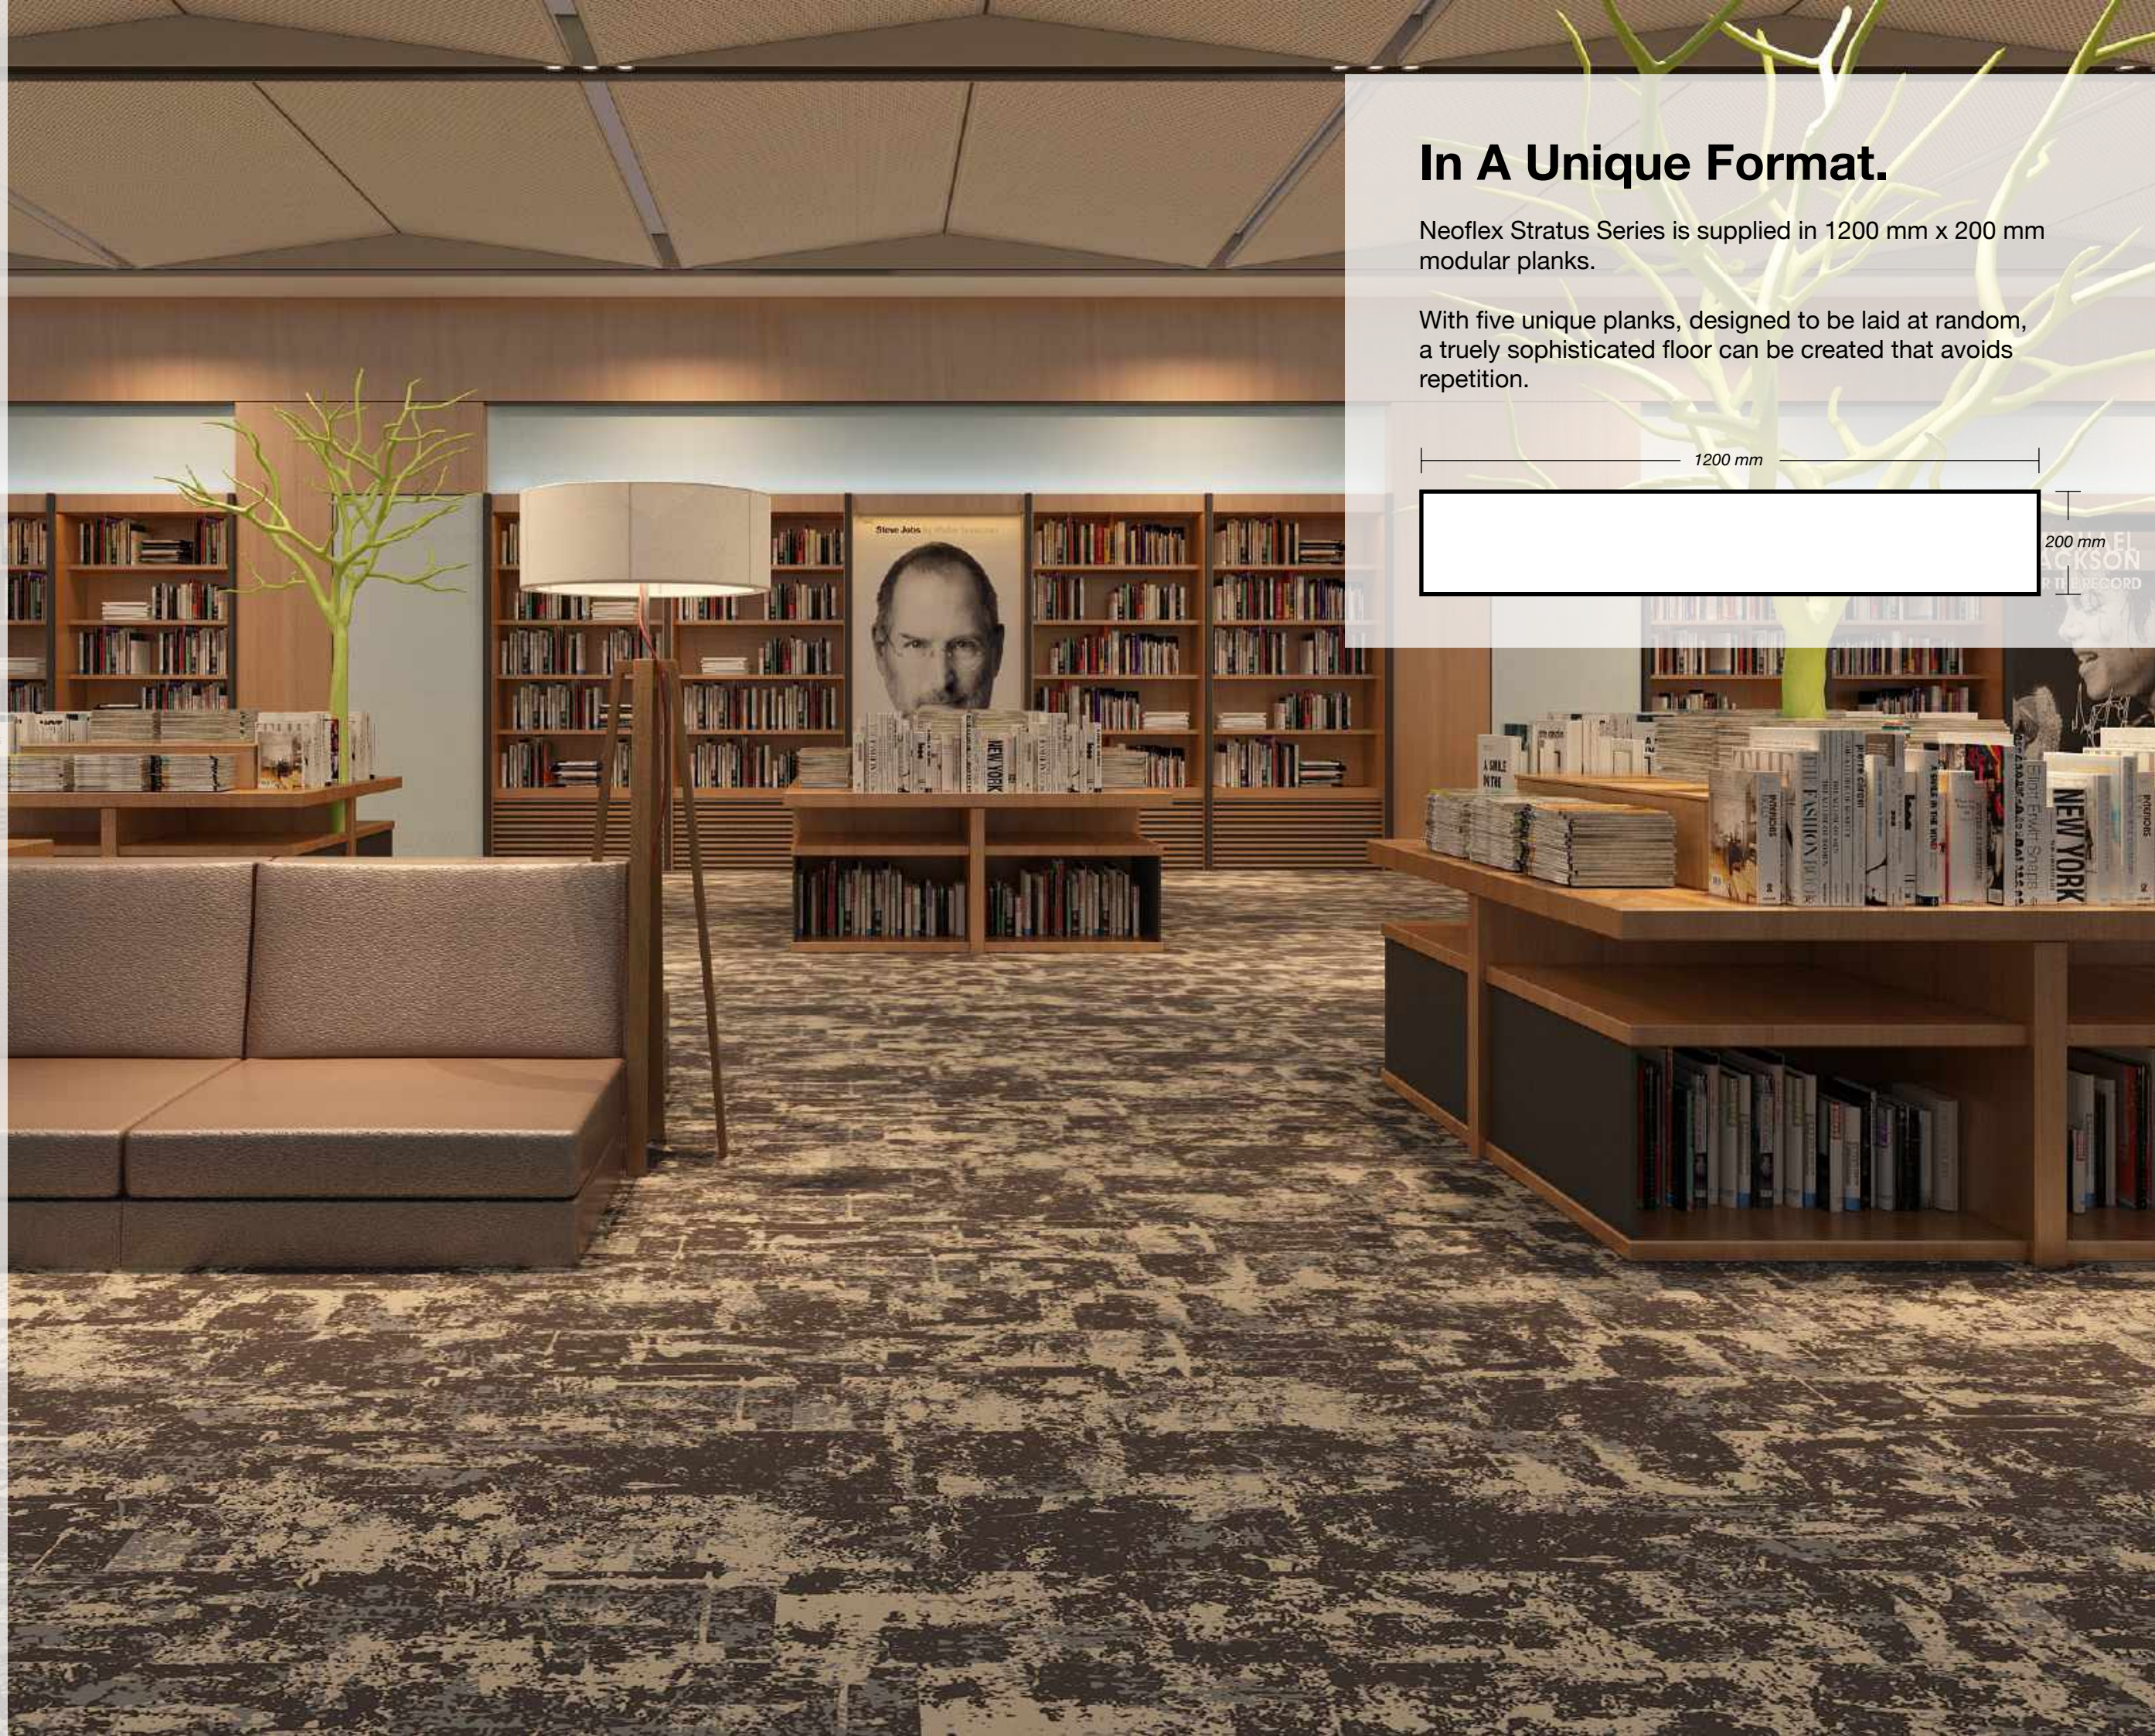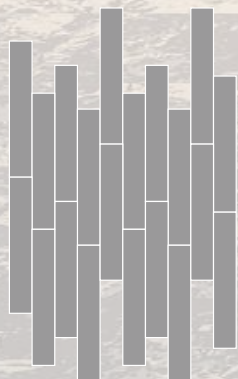

In A Unique Format.

Neoflex Stratus Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truly sophisticated floor can be created that avoids repetition.

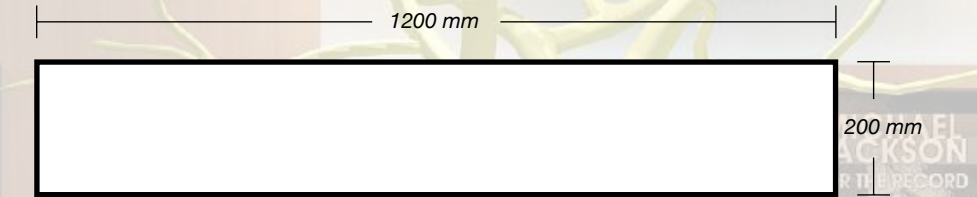



Color
488 RF09 NG06

Thickness
6 mm

Installation
Random






Color
488 RF05 NG06

Thickness
6 mm

Installation
Random

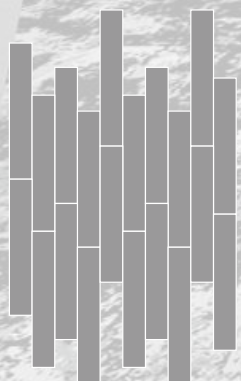



Color
488 RF17 NG18

Thickness
2.5 mm

Installation
Random






Color
488 RF05 NG16

Thickness
6 mm

Installation
Random

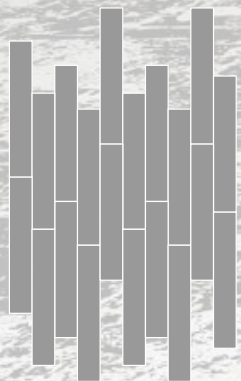




Color
488 RF18 NG07

Thickness
6 mm

Installation
Random

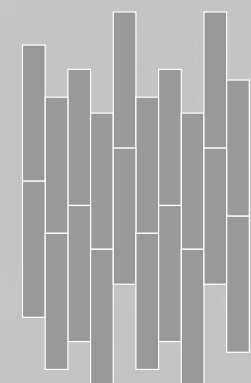




Colors
488 RF11 NG07 488 RF05 NG07

Thickness
2.5 mm

Installation
Random & Cut to Contour

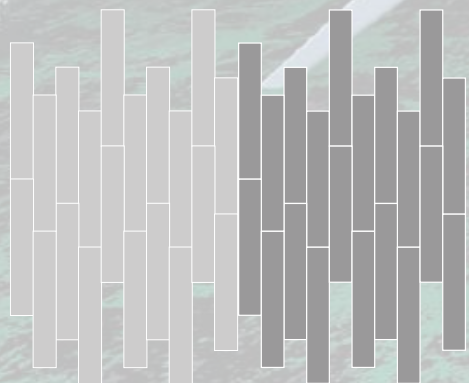

Standard Colors.

Neoflex Stratus Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.



488 RF05 NG06



488 RF05 NG08



488 RF05 NG07



488 RF06 NG07



488 RF08 NG06



488 RF08 NG07



488 RF15 NG16



488 RF15 NG17



488 RF15 NG18



488 RF15 NG07



488 RF16 NG17



488 RF16 NG18



488 RF16 NG07



488 RF17 NG18



488 RF17 NG07



488 RF18 NG07



488 RF09 NG06



488 RF19 NG06



488 RF12 NG06




488 RF02 NG04



488 RF04 NG07



488 RF10 NG11

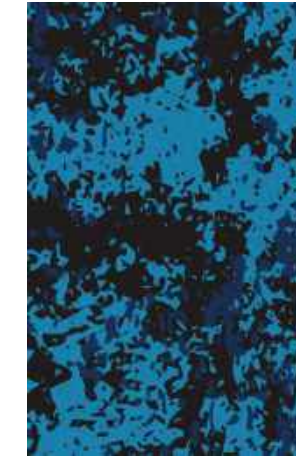

488 RF09 NG20



488 RF20 NG07



488 RF11 NG07



488 RF05 NG16



488 RF16 NG06




488 RF06 NG18


Installation Options.

Neoflex Stratus Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


Random

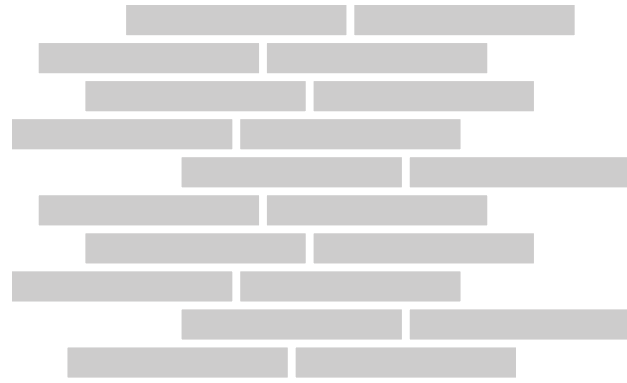


2-Color Random

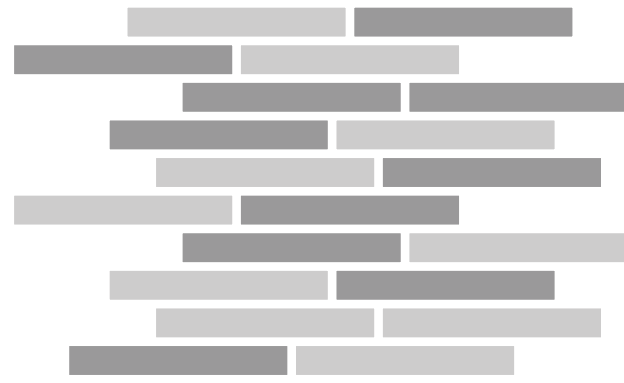


3-Color Random

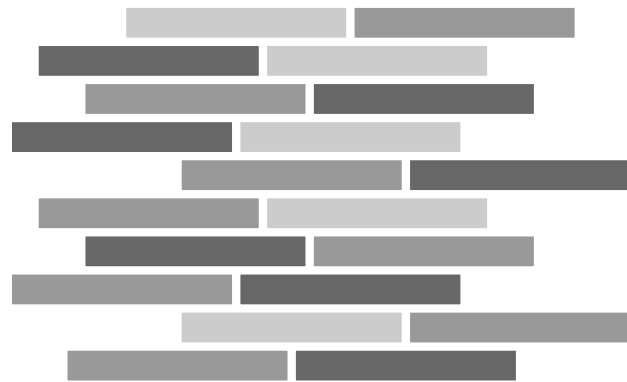

2-Color Herringbone

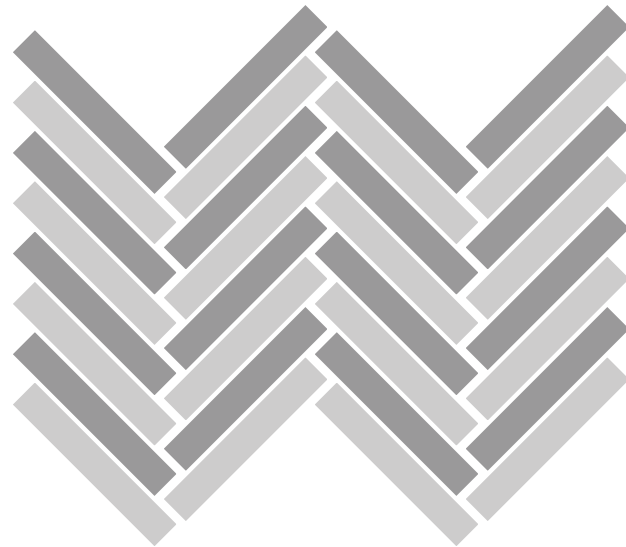

2-Color Herringbone

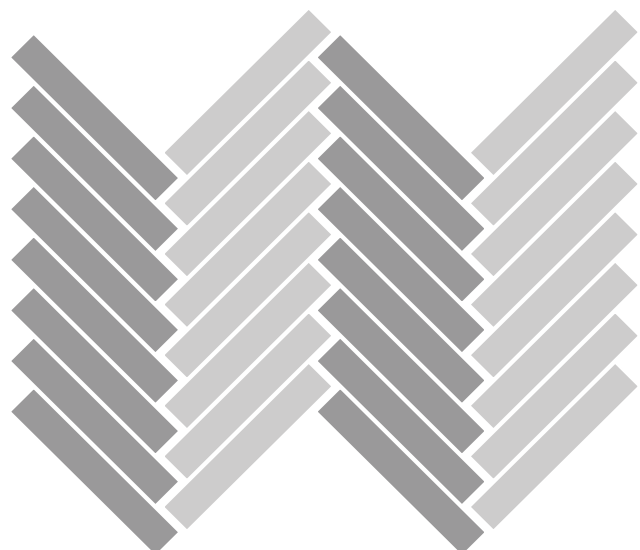

3-Color Herringbone



Technical Specifications.

Neoflex Stratus Fitness Flooring is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC, hardwood, laminated wood or EVA foam.

Property	Standard	Result	
Dimensions		1200 mm x 200 mm	
Thickness		2.5 mm	6 mm
Weight		± 3.5 kg/m ²	± 5.95 kg/m ²
Hardness	ISO 7619-1:2010	62.1° Shore A	
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction	
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate	
Dynamic Coefficient of Friction	EN 13893:2012	0.7	
Light Fastness	ISO 105-B02:2013	7-8 Grade	
Residual Indentation	ISO 24343-1:2002	0.18 mm	
Dimensional Stability	ISO 23999:2012	0.5%	
Flammability	EN 13501-1	Efl (Optional Cfl-s1)	
Installation		Stikibak™ or Full-Bond	

Standard Thicknesses.

Neoflex Stratus Series is manufactured in 2 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EPDM top layer. 6mm thickness consists of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.



If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Stratus Series can be adhered on top.



Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Stratus Series.

Rephouse manufactures a complete range of commercial rubber flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.

 www.rephouse.com

 info@rephouse.com

 [@rephouse](https://www.facebook.com/rephouse)

 [@rephouse](https://www.instagram.com/rephouse)



REPHOUSE