

# NEOFLEX WOOD SERIES

RUBBER FLOORING  
IN PLANKS





## Neoflex Wood Series.

Neoflex™ Wood Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor commercial settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.


Neoflex Resilient Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.



**Color**  
WD 31716

**Thickness**  
2.5 mm

**Installation**  
Random

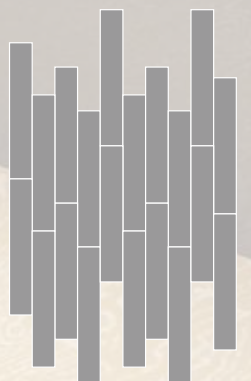






**Color**  
WD 31517

**Thickness**  
6 mm


**Installation**  
Random

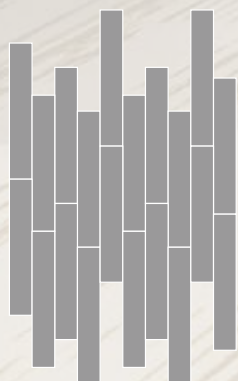

## Inspired by Nature.

Inspired by the knots and grain of mature oak wood, and designed to evoke a complex reinterpretation of traditional wood textures.

Neoflex Wood Series showcases exquisite color combinations across its 56 colorways, giving the floor a strong presence that is at once both dramatic, yet reassuring.

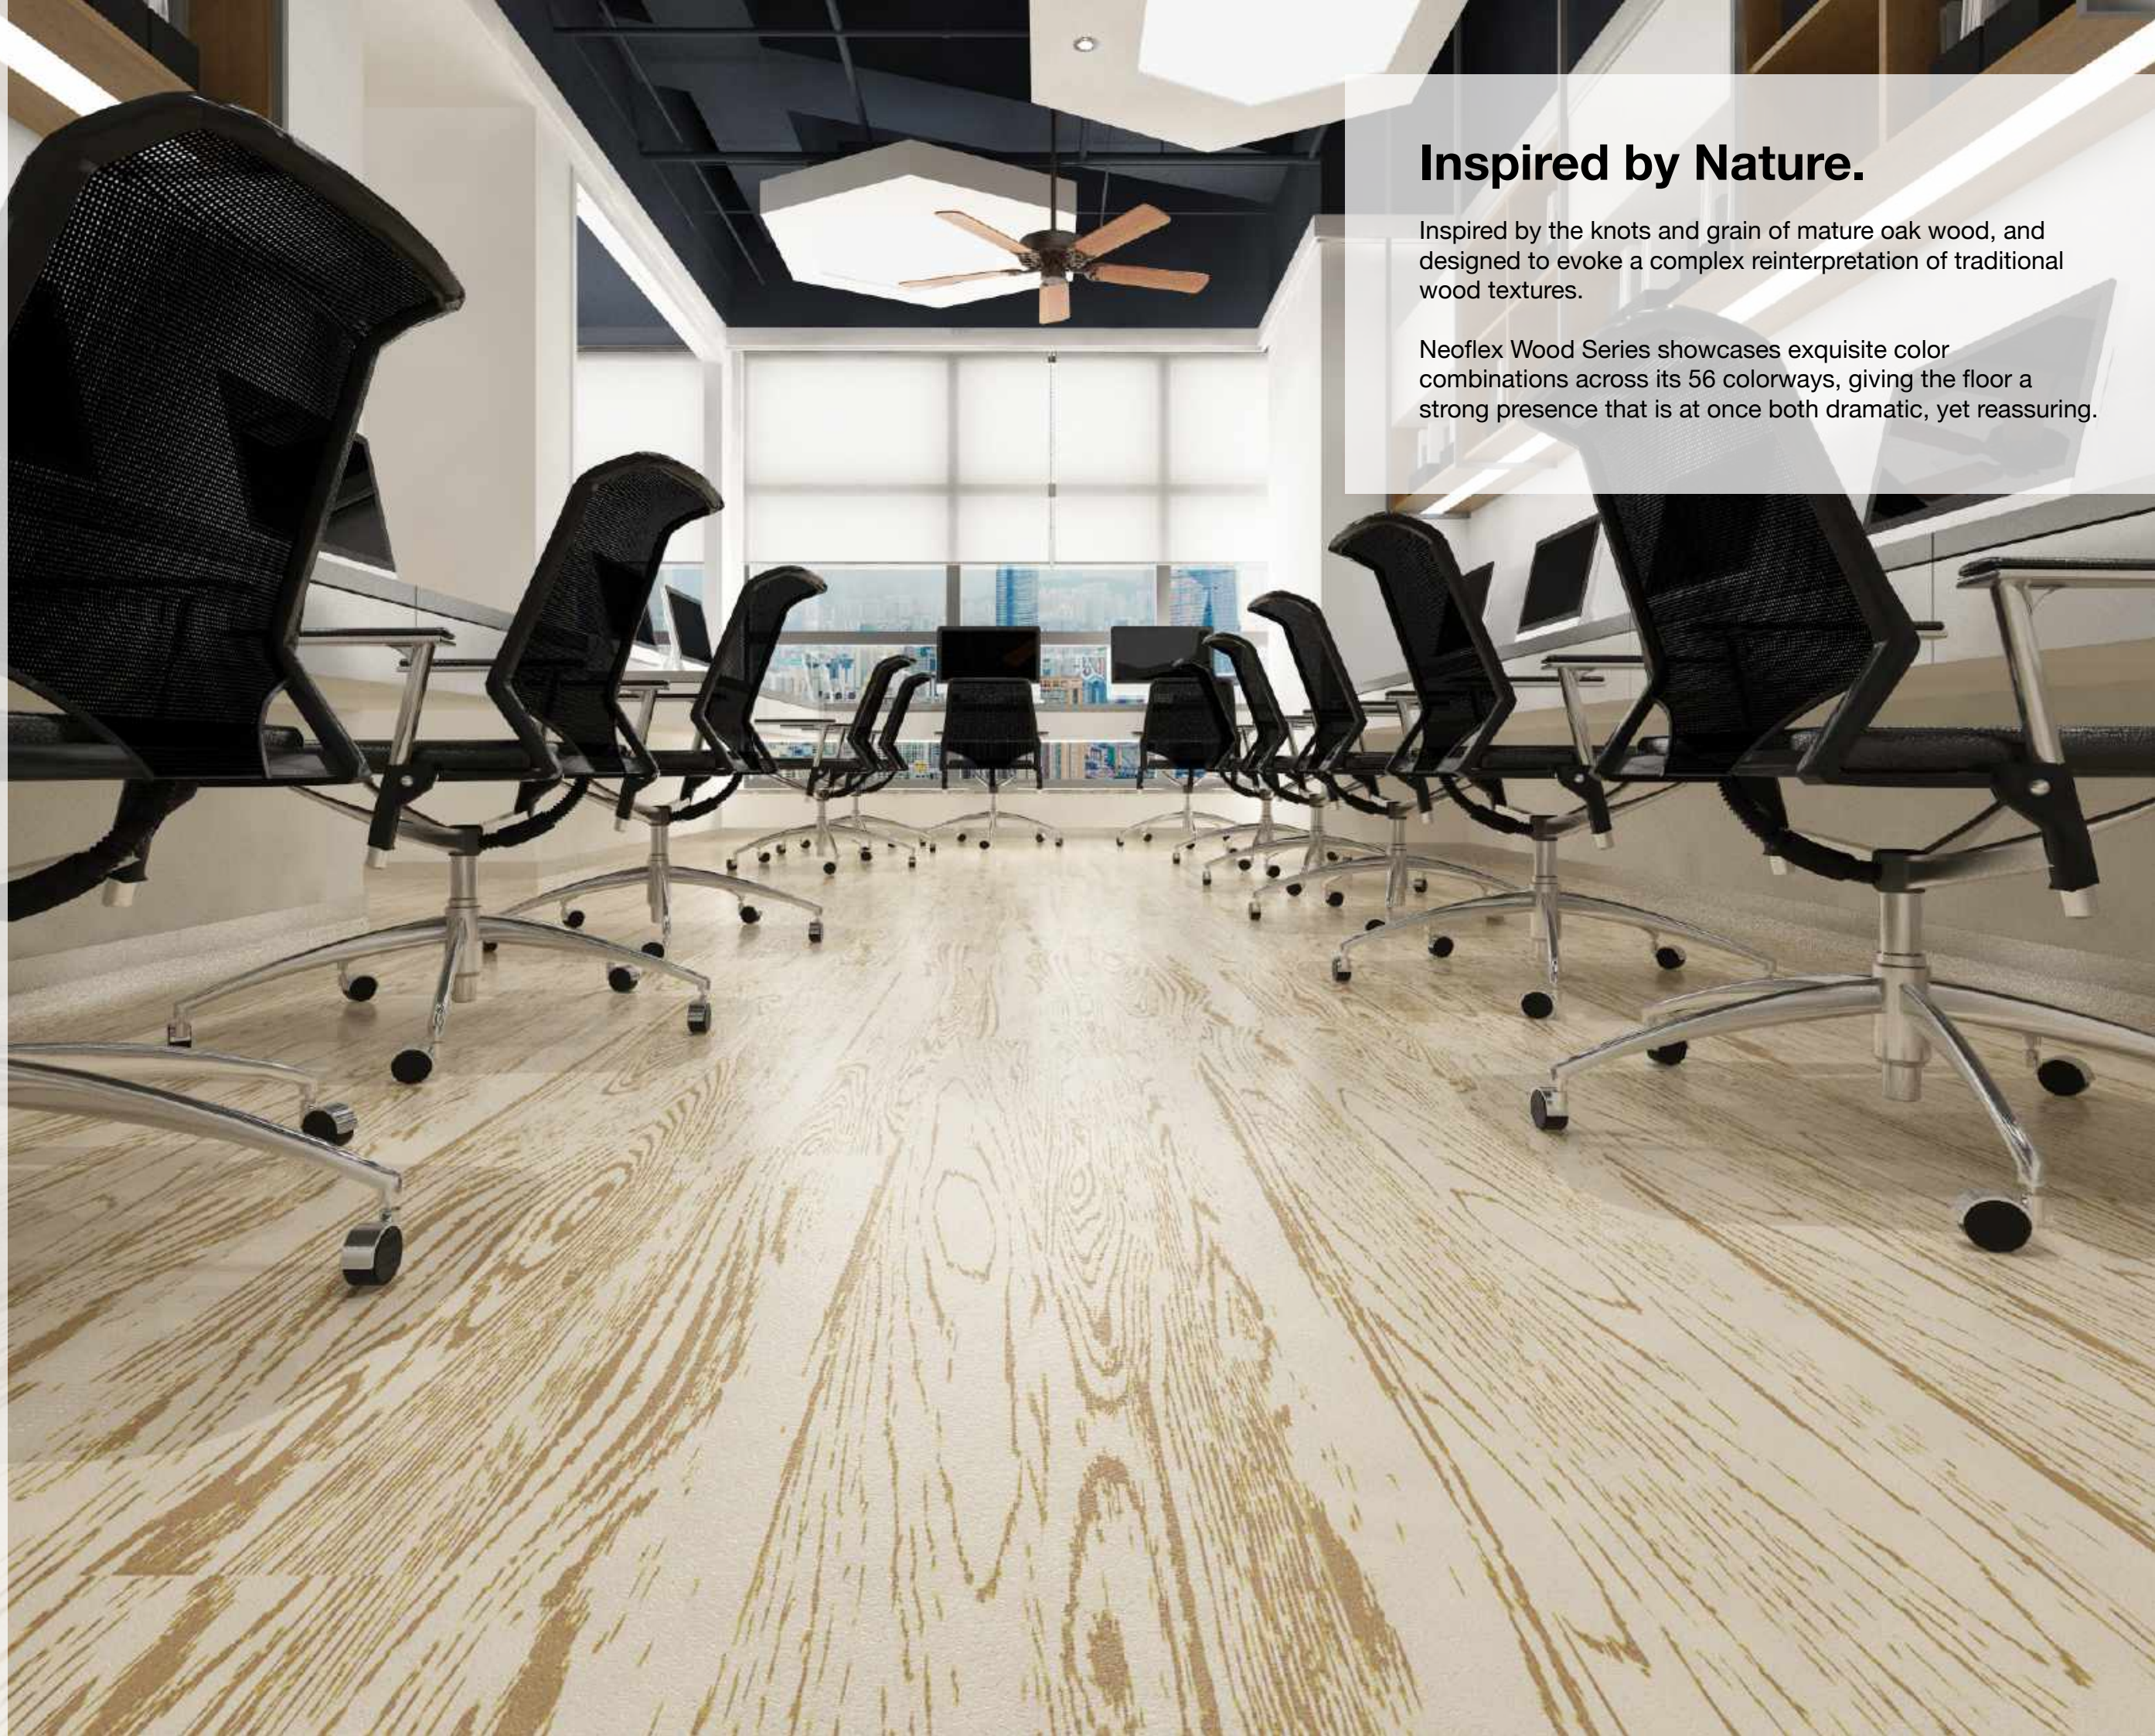






**Color**  
WD 30605

**Thickness**  
6 mm

**Installation**  
Random

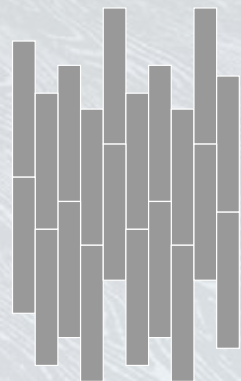





**Colors**

WD 28805


WD 30507

**Thickness**

2.5 mm

**Installation**

Random & Cut to Contour

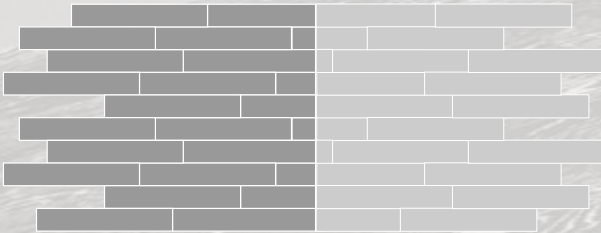





**Colors**  
WD 31516

**Thickness**  
2.5 mm

**Installation**  
Herringbone








**Color**  
WD 31919

**Thickness**  
6 mm

**Installation**  
Random

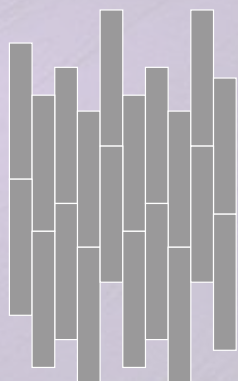






**Colors**  
WD 31517

**Thickness**  
6 mm

**Installation**  
Herringbone

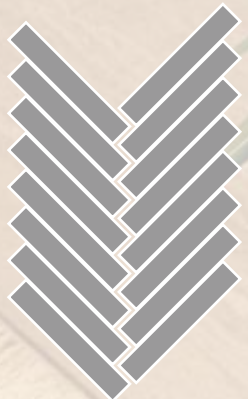






**Color**  
WD 31718

**Thickness**  
6 mm

**Installation**  
Random

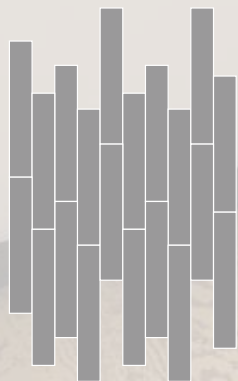

## Fit for Purpose.

Neoflex Wood Series is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.







**Color**  
WD 31010

**Thickness**  
6 mm

**Installation**  
Random








**Color**  
WD 30807

**Thickness**  
2.5 mm


**Installation**  
Random

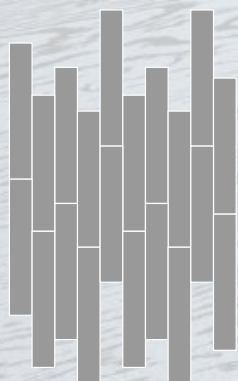

## In A Unique Format.

Neoflex Wood Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truly sophisticated floor can be created that avoids repetition.

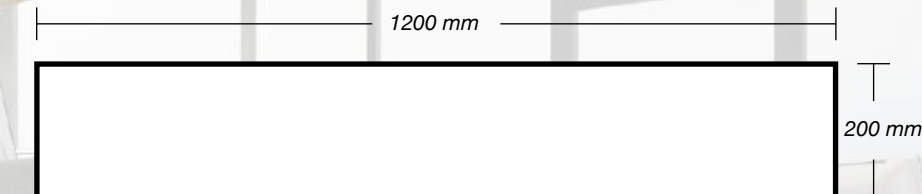






**Colors**  
WD 30303

**Thickness**  
6 mm

**Installation**  
Random

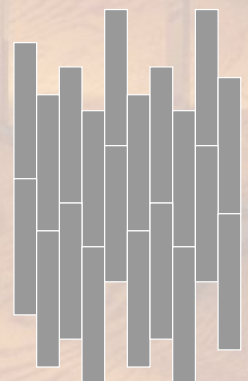






**Color**  
WD 32009

**Thickness**  
6 mm

**Installation**  
Random

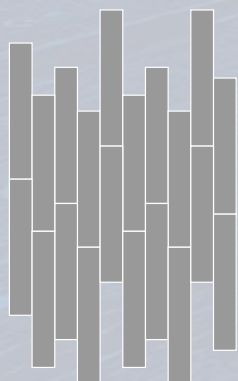






**Colors**  
WD 30605

**Thickness**  
6 mm

**Installation**  
Random

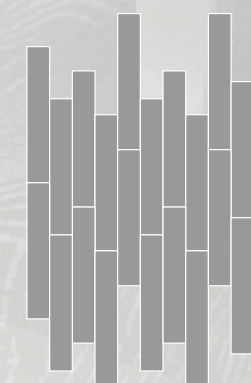






**Color**  
WD 28807

**Thickness**  
2.5 mm

**Installation**  
Herringbone

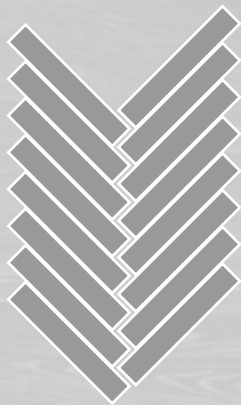



# Standard Colors.

Neoflex Wood Series is available in a variety of standard colorways that utilize a colored pattern printed over a black EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.



WD 28802



WD 28803



WD 28805



WD 28806



WD 28807



WD 28809



WD 28810



WD 28815



WD 28816



WD 28817



WD 28818



WD 28819

# Premium Colors.

Neoflex Wood Series is available in a wide variety of premium colorways that utilize a colored pattern printed over a colored EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.



WD 30107



WD 30207



WD 30307



WD 30407



WD 30507



WD 30607



WD 30807



WD 30907



WD 31007



WD 31107



WD 31207



WD 31307





WD 31407



WD 31507



WD 31607



WD 31707



WD 31516



WD 31517



WD 31518



WD 31617



WD 31807



WD 31907



WD 32007



WD 32107



WD 31919



WD 32009



WD 31506



WD 31406



WD 32207



WD 32307



WD 32407



WD 32507



WD 31405



WD 30514



WD 30922



WD 32209



WD 32607



WD 30303



WD 30506



WD 30605



WD 31010



WD 31110



WD 30204




WD 30402




# Installation Options.

Neoflex Wood Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


Random

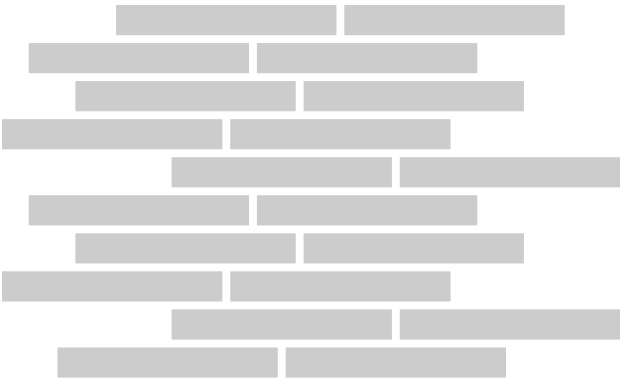


2-Color Random

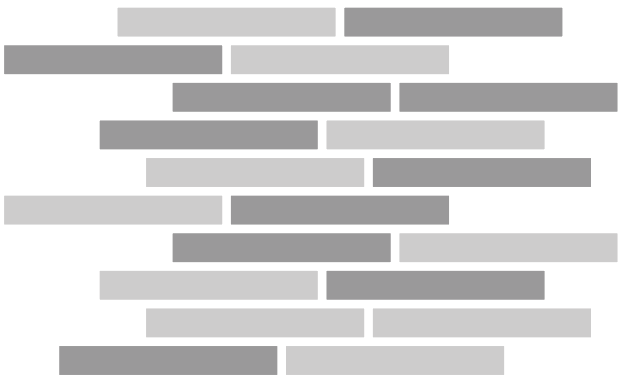


2-Color Random

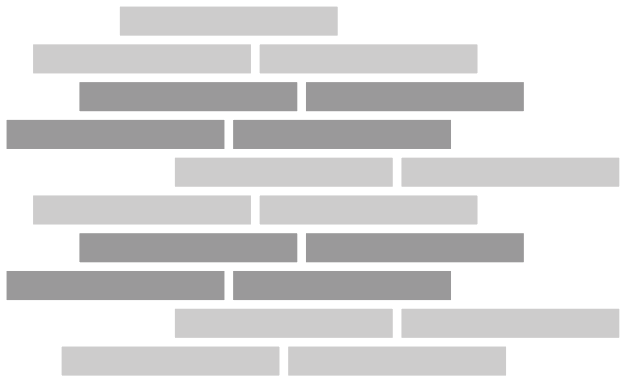


2-Color Random

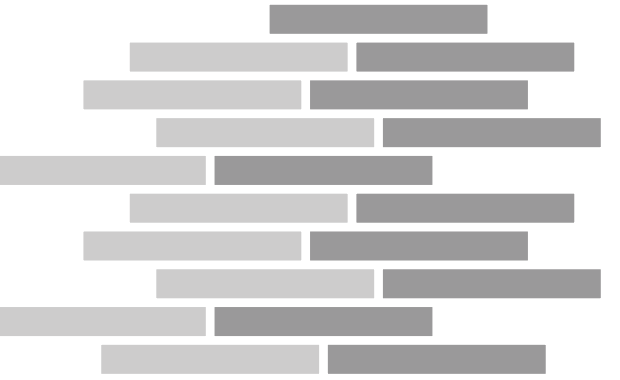


3-Color Random

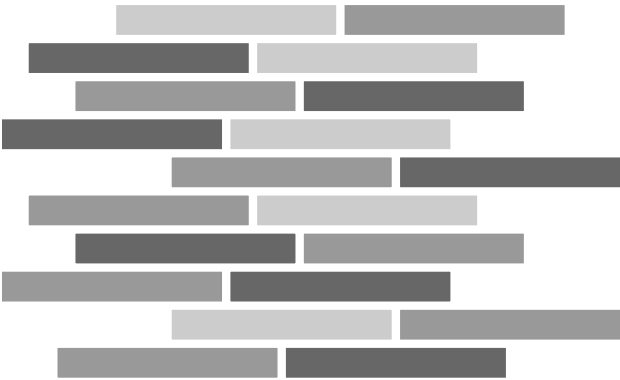


Herringbone

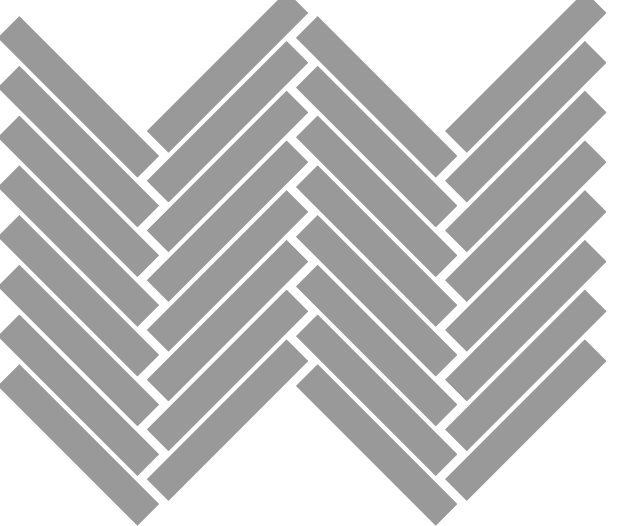


2-Color Herringbone

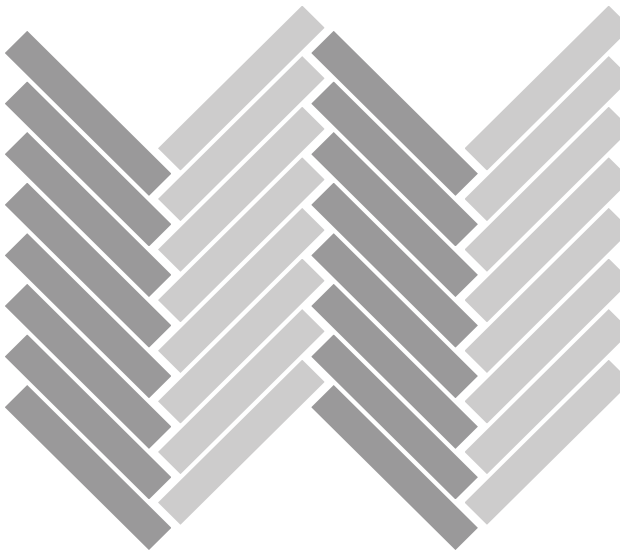


2-Color Herringbone

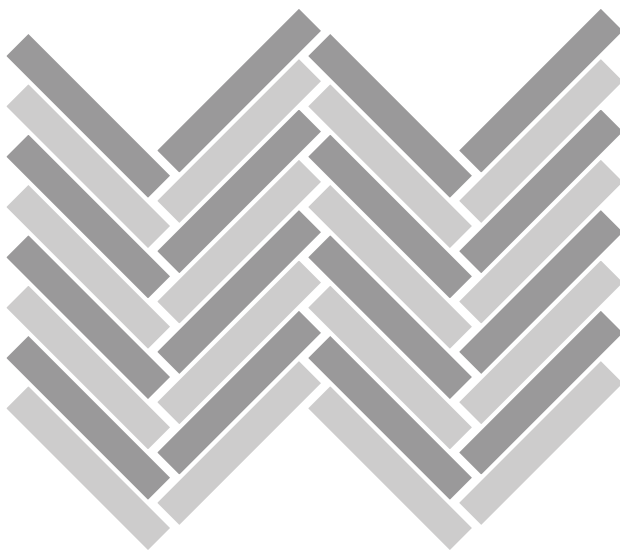


Checkerboard

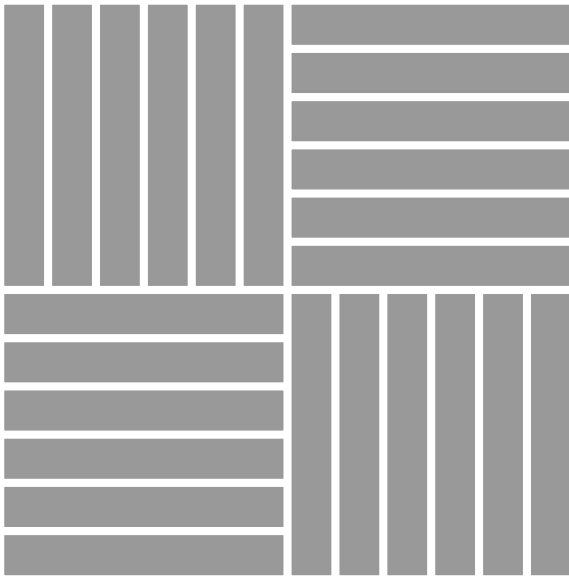


2-Color Checkerboard

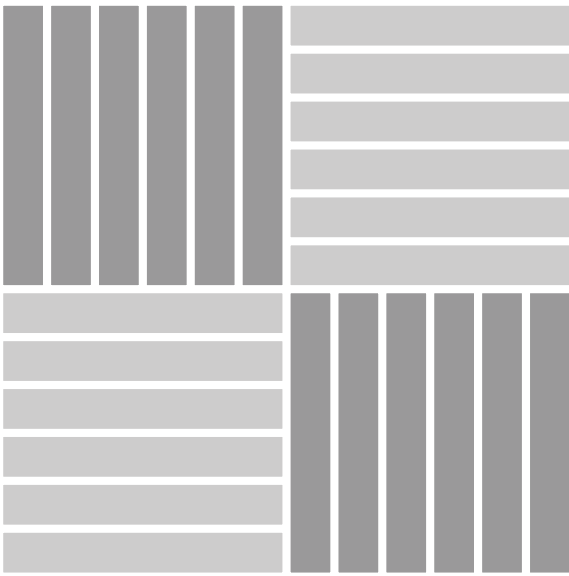

2-Color Checkerboard

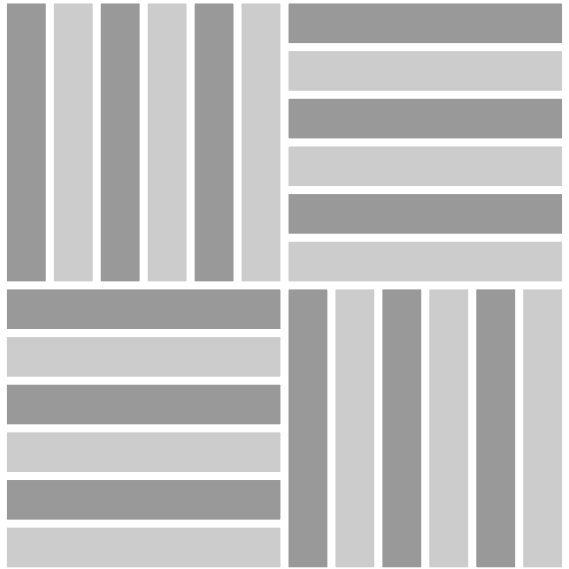

2-Color Checkerboard

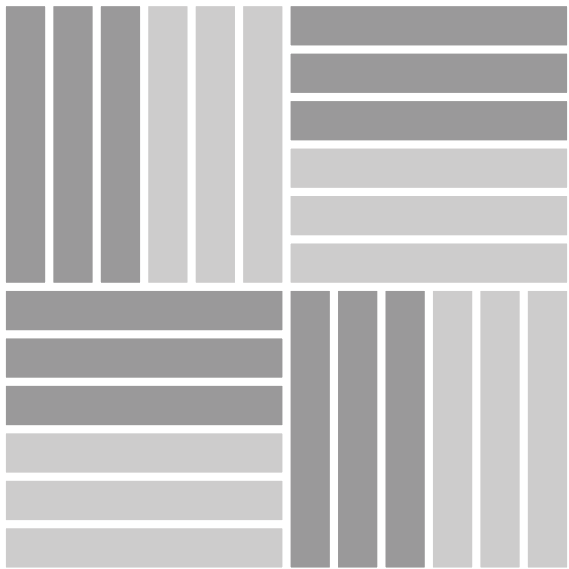



# Technical Specifications.

Neoflex Wood Series Fitness Flooring is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC, hardwood, laminated wood or EVA foam.

Property	Standard	Result	
Dimensions		1200 mm x 200 mm	
Thickness		2.5 mm	6 mm
Weight	<i>Standard Wood Series</i>	3.5 kg / m²	5.95 kg / m²
	<i>Premium Wood Series</i>	3.8 kg / m²	6.25 kg / m²
Hardness	ISO 7619-1:2010	62.1° Shore A	
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction	
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate	
Dynamic Coefficient of Friction	EN 13893:2012	0.7	
Light Fastness	ISO 105-B02:2013	7-8 Grade	
Residual Indentation	ISO 24343-1:2002	0.18 mm	
Dimensional Stability	ISO 23999:2012	0.5%	
Flammability	EN 13501-1	Efl (Optional Cfl-s1)	
Installation		Stikibak™ or Full-Bond	

## Standard Thicknesses.

Neoflex Wood Series is manufactured in 2 thicknesses, each designed to be used for different applications.

All thicknesses utilize a 2.5mm EDPM top layer. The 6mm thickness consist of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.



If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Wood Series can be adhered on top.



## Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Wood Series.

Rephouse manufacturers a complete range of commercial rubber flooring products. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.





