

RUBBER FLOORING
IN PLANKS

NEOFLEX STRIATION SERIES



Neoflex Striation Series.

Neoflex™ Striation Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor fitness and leisure settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Fitness Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.






Color
488 SK15 LN16

Thickness
10 mm

Installation
Random with
Direction Change

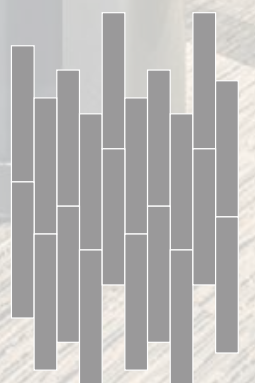




Color
488 SK06 LN07

Thickness
6 mm

Installation
Random

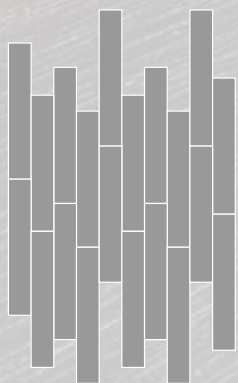

Inspired by Nature.

Inspired by geological linear furrows in layers of colors generated by glaciation, and designed to evoke a subtle, textured, contemporary aesthetic.

Neoflex Striation Series showcases exquisite color combinations across its 36 colorways, giving the floor a strong presence that is at once both dramatic, yet reassuring.








Color
488 SK05 LN08

Thickness
10 mm

Installation
Random

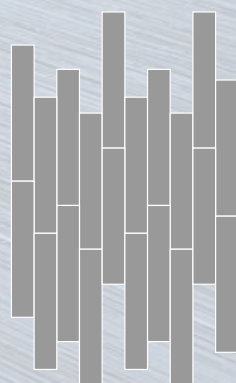




Color
488 SK17 LN18

Thickness
10 mm



Installation
Random

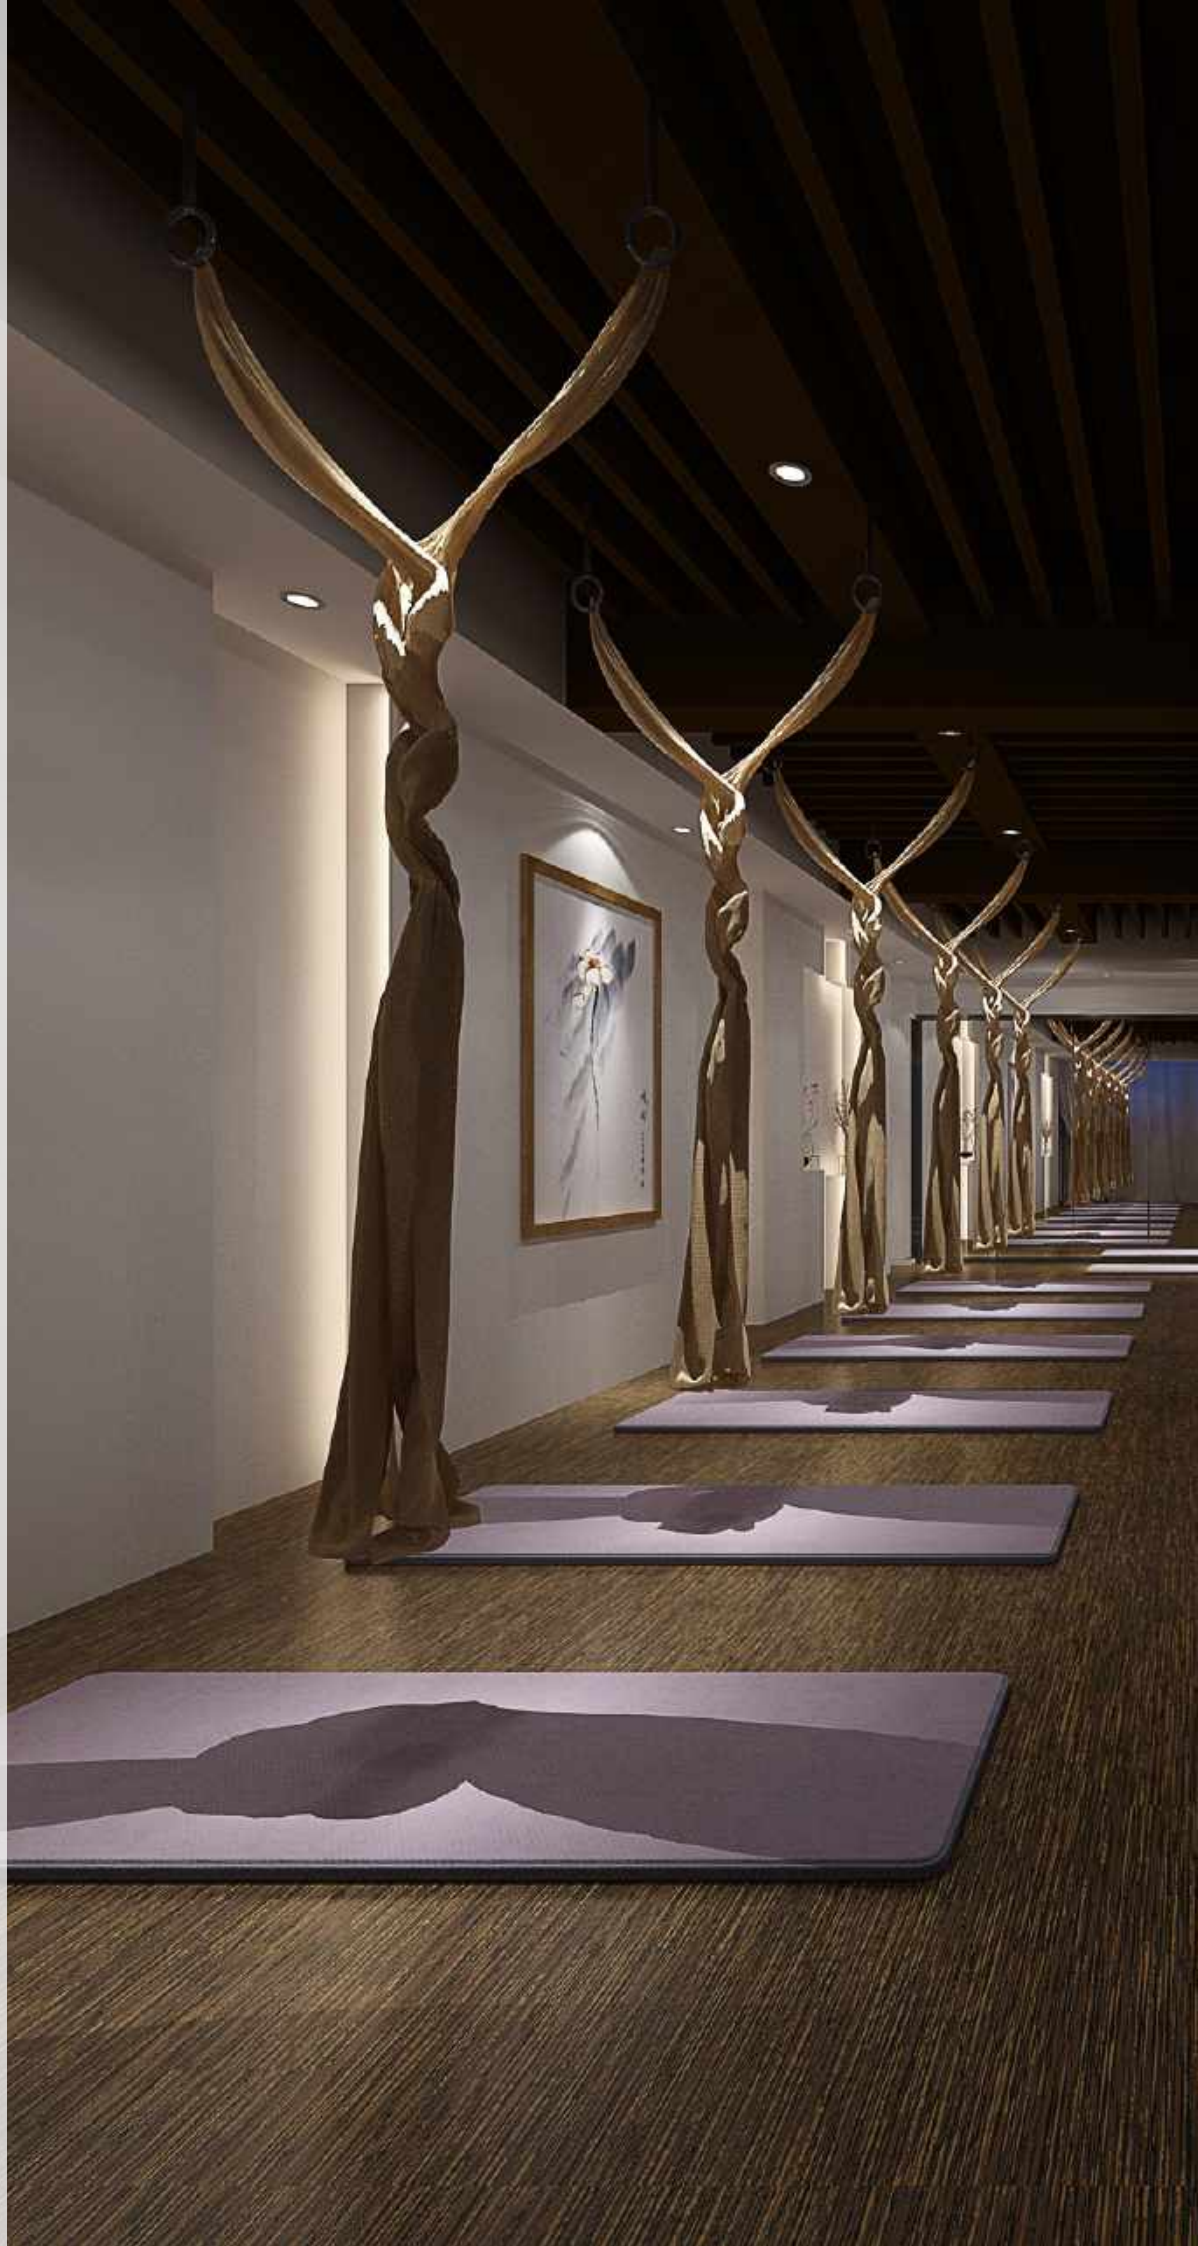

In A Unique Format.

Neoflex Striation Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truly sophisticated floor can be created that avoids repetition.

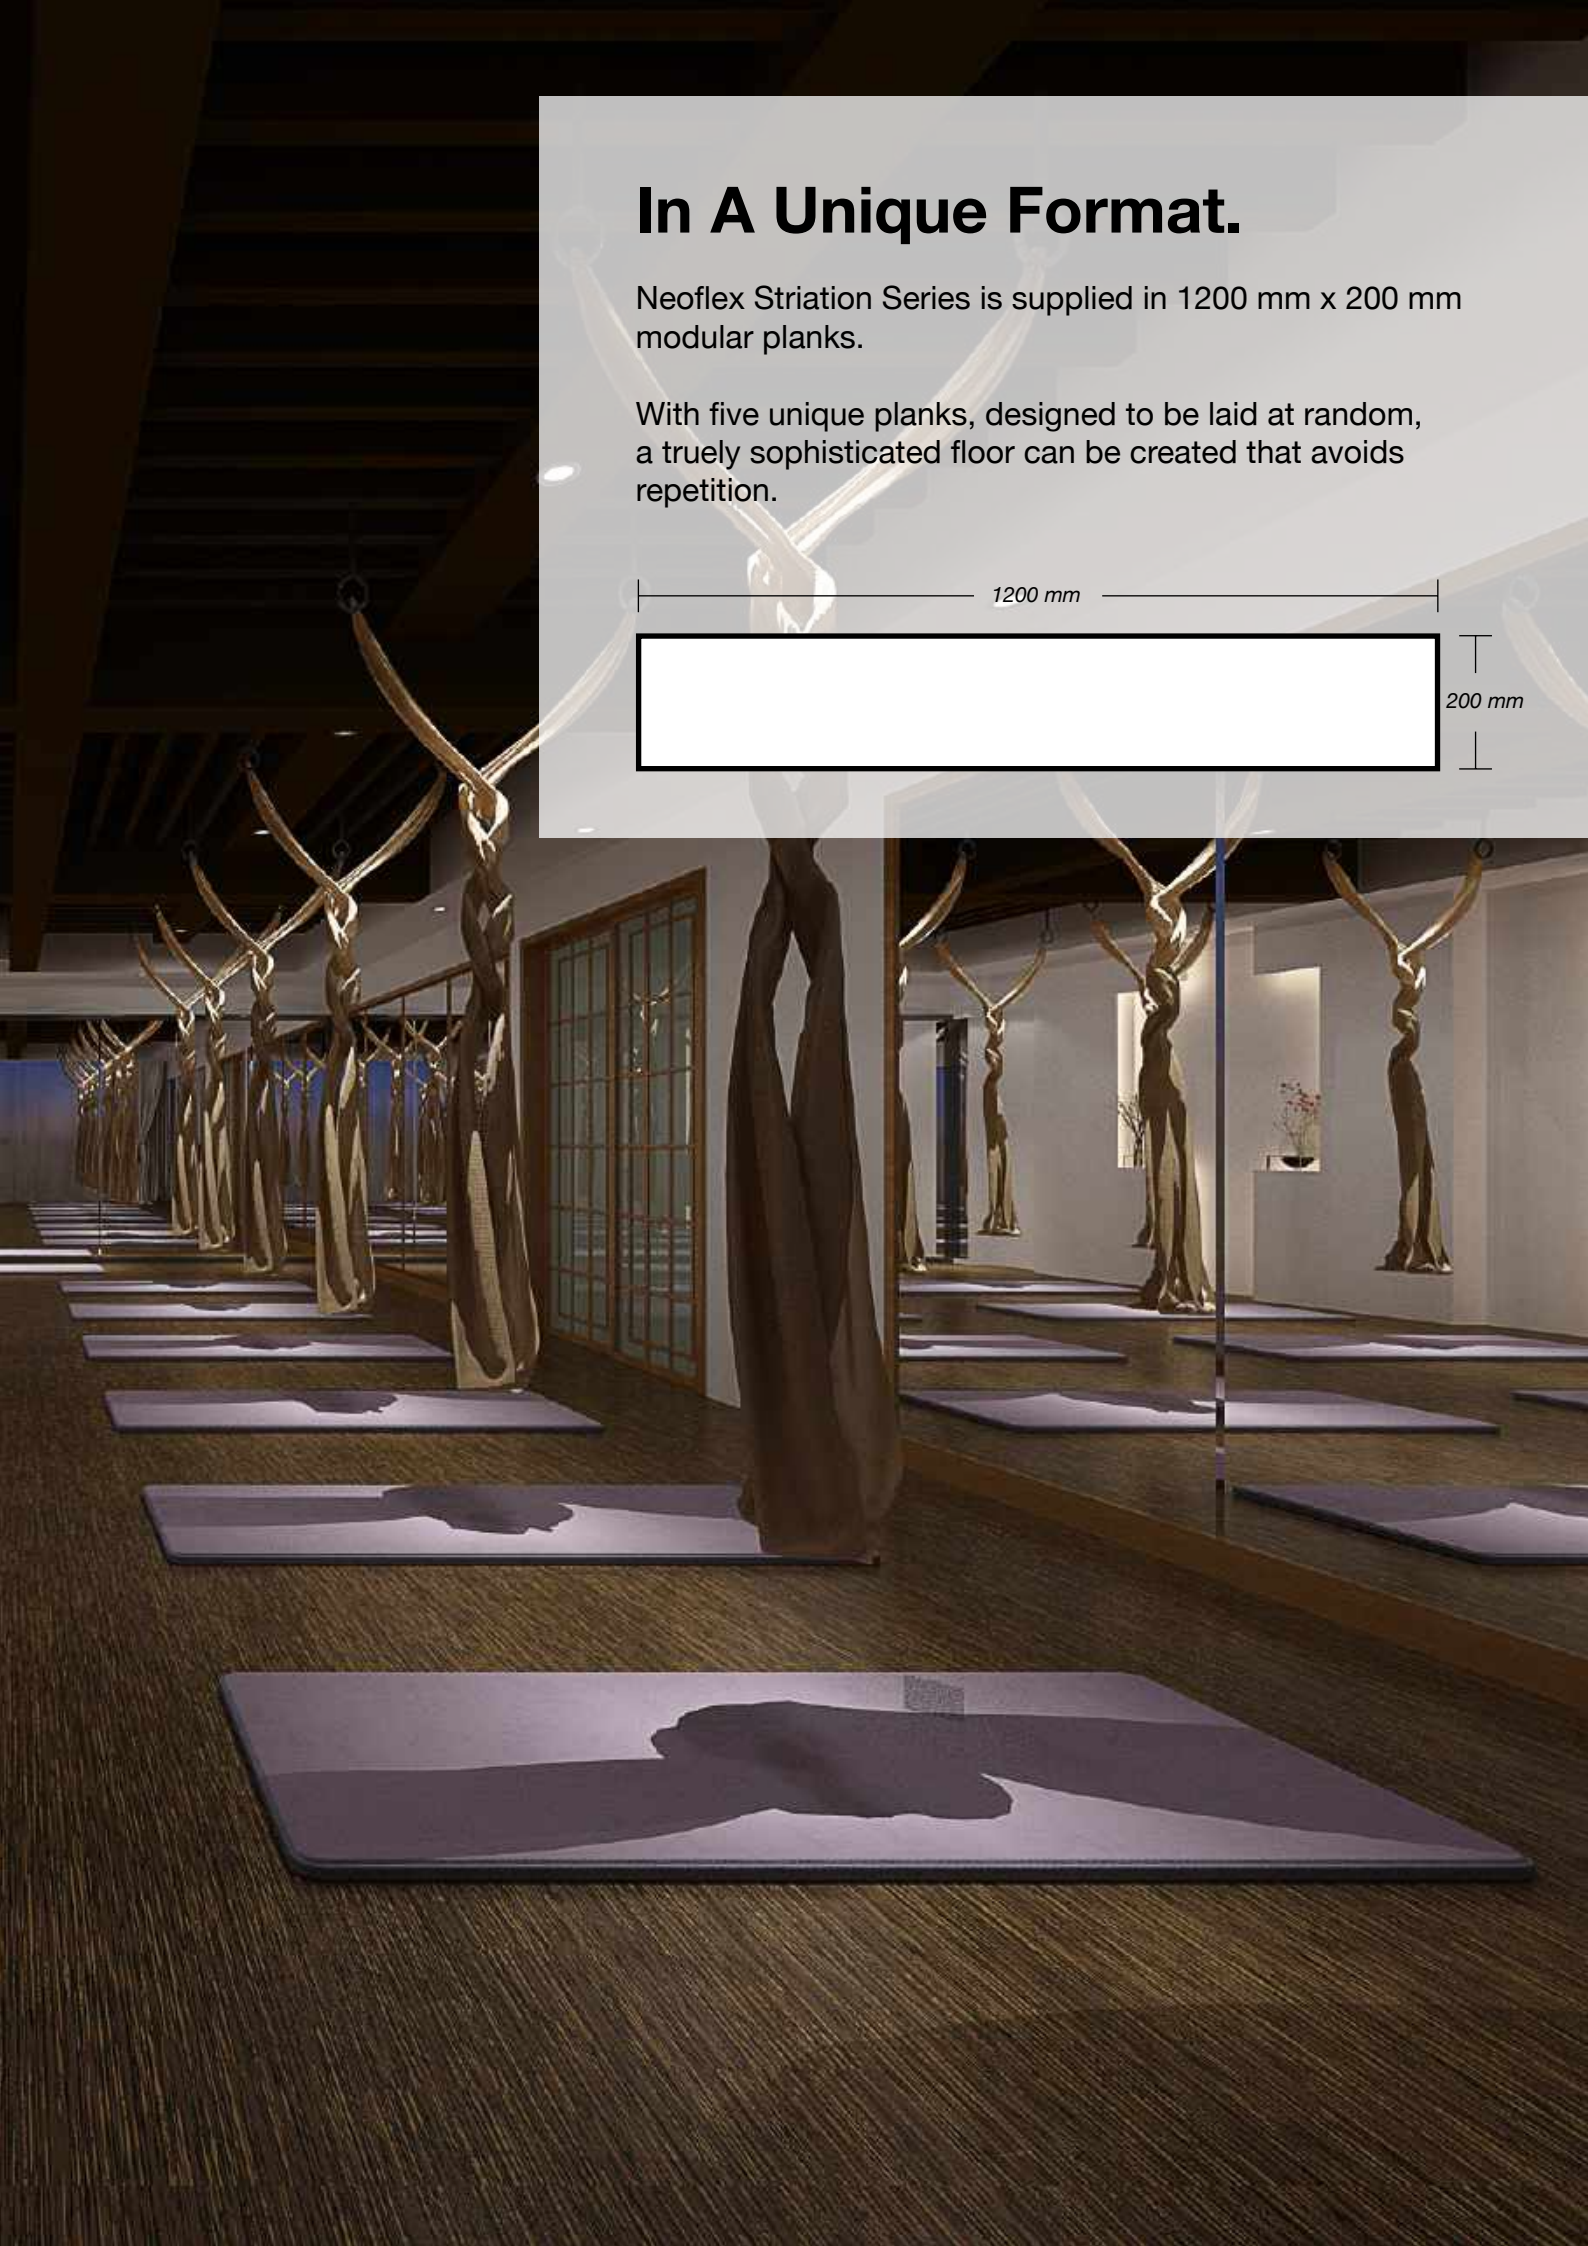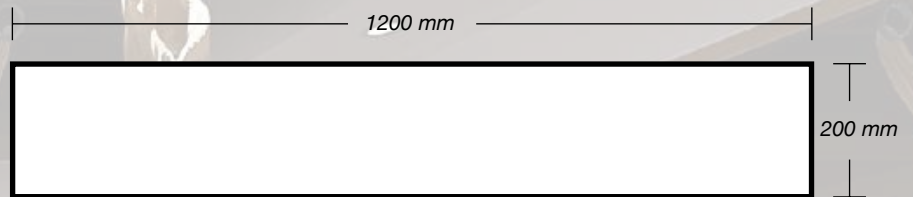



Colors
488 SK15 LN16

Thickness
6 mm

Installation
Herringbone






Fit for Purpose.

Neoflex Striation Series Fitness Flooring is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts by free-weights or kettle-bells and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.

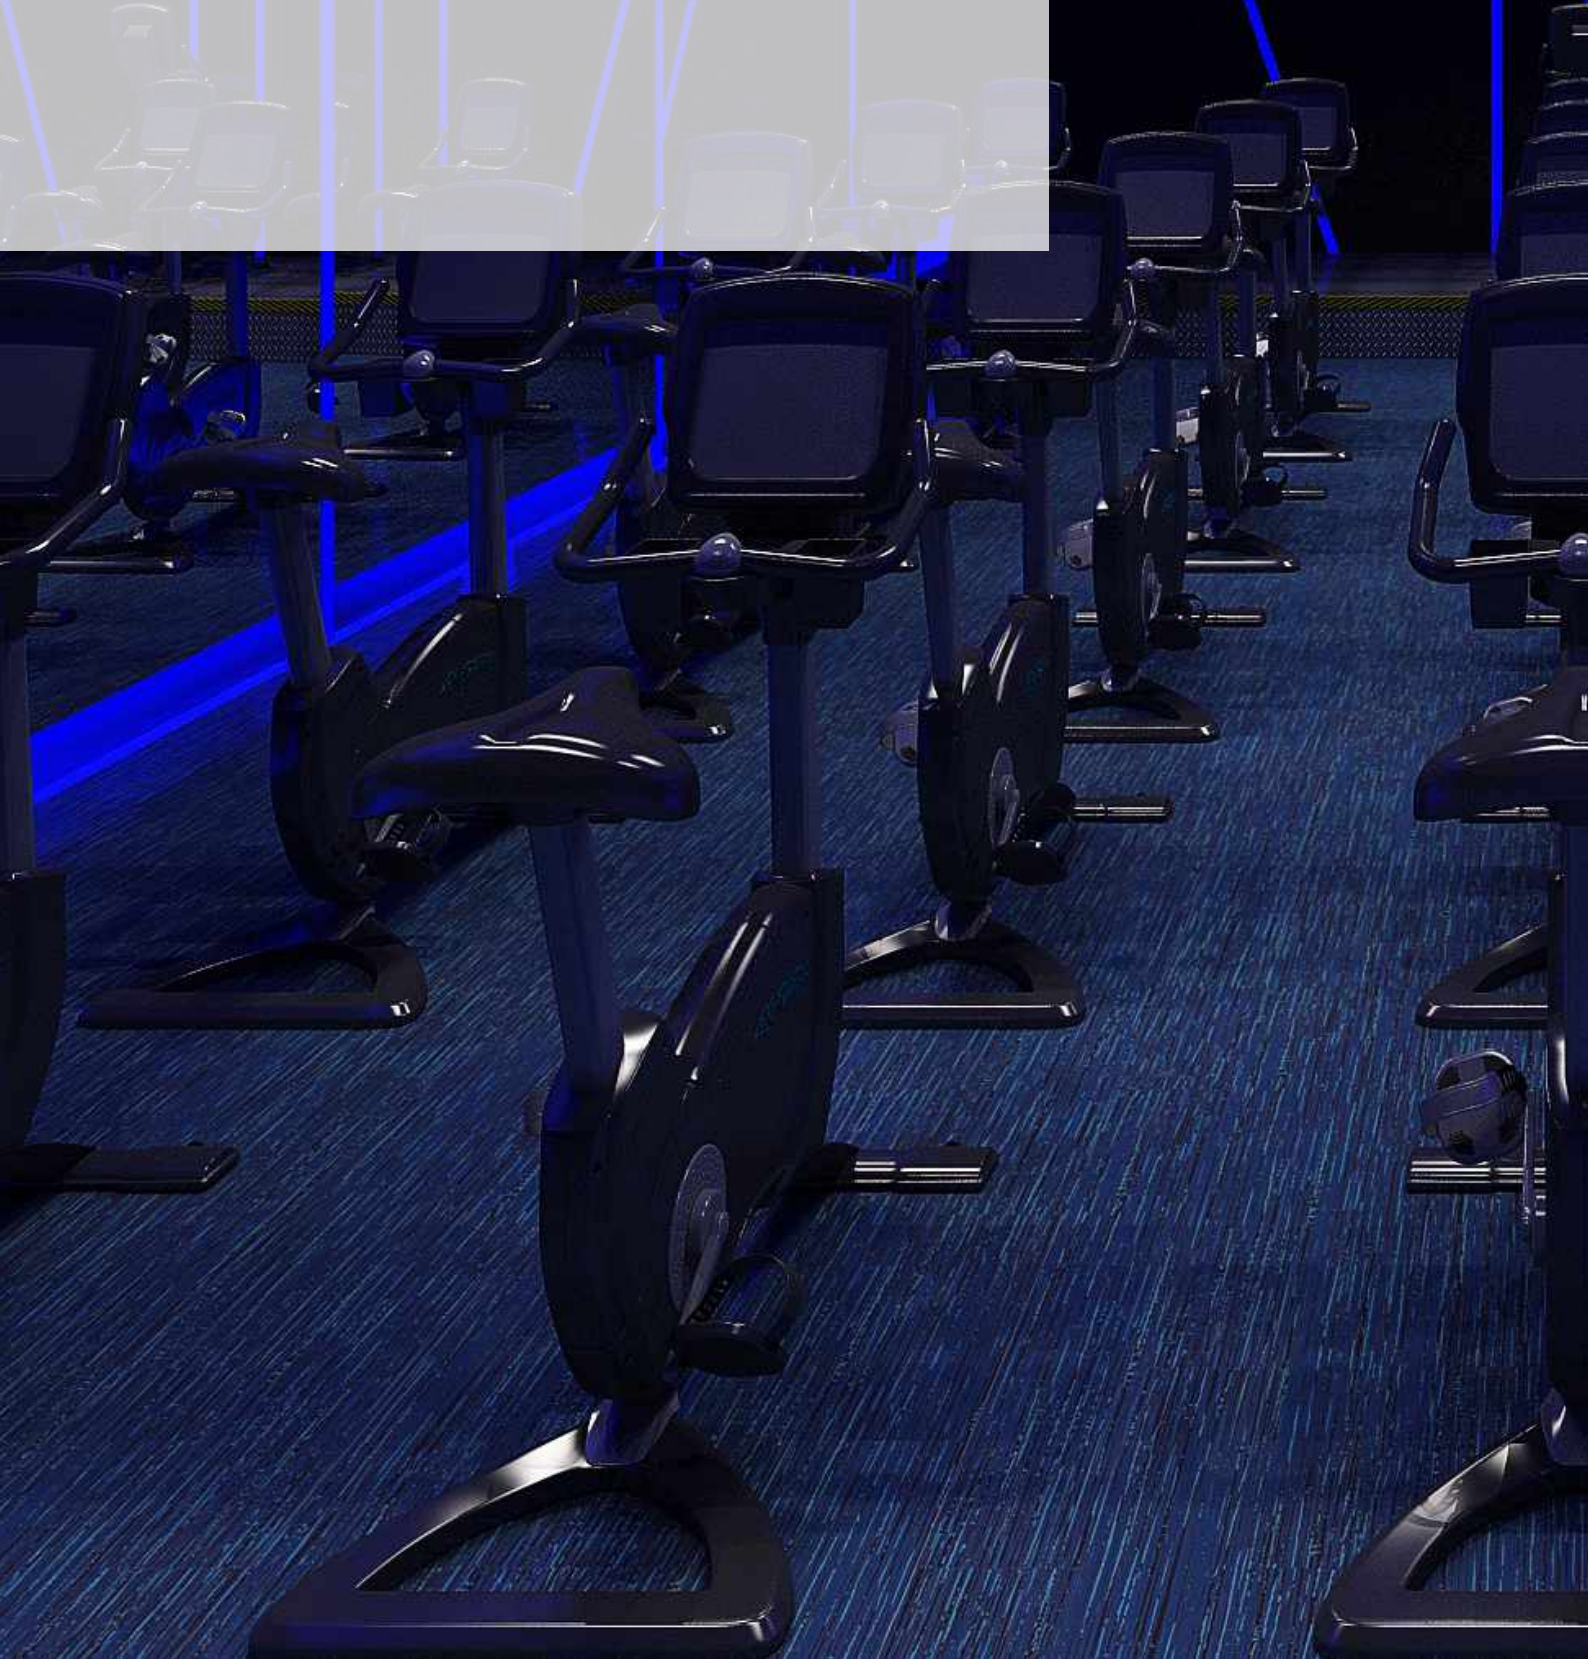




Color
488 SK09 LN20

Thickness
2.5 mm

Installation
Random

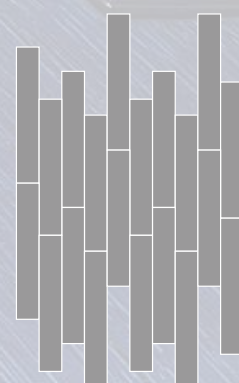




Color
488 RF14 LN15

Thickness
8 mm

Installation
Random

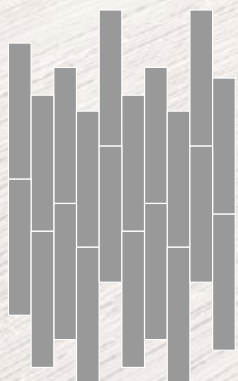








Color
488 SK10 LN11

Thickness
6 mm

Installation
Random

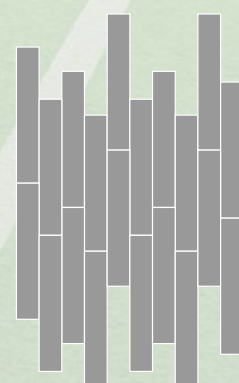



Colors
488 SK16 LN17


Thickness
10 mm

Installation
Herringbone








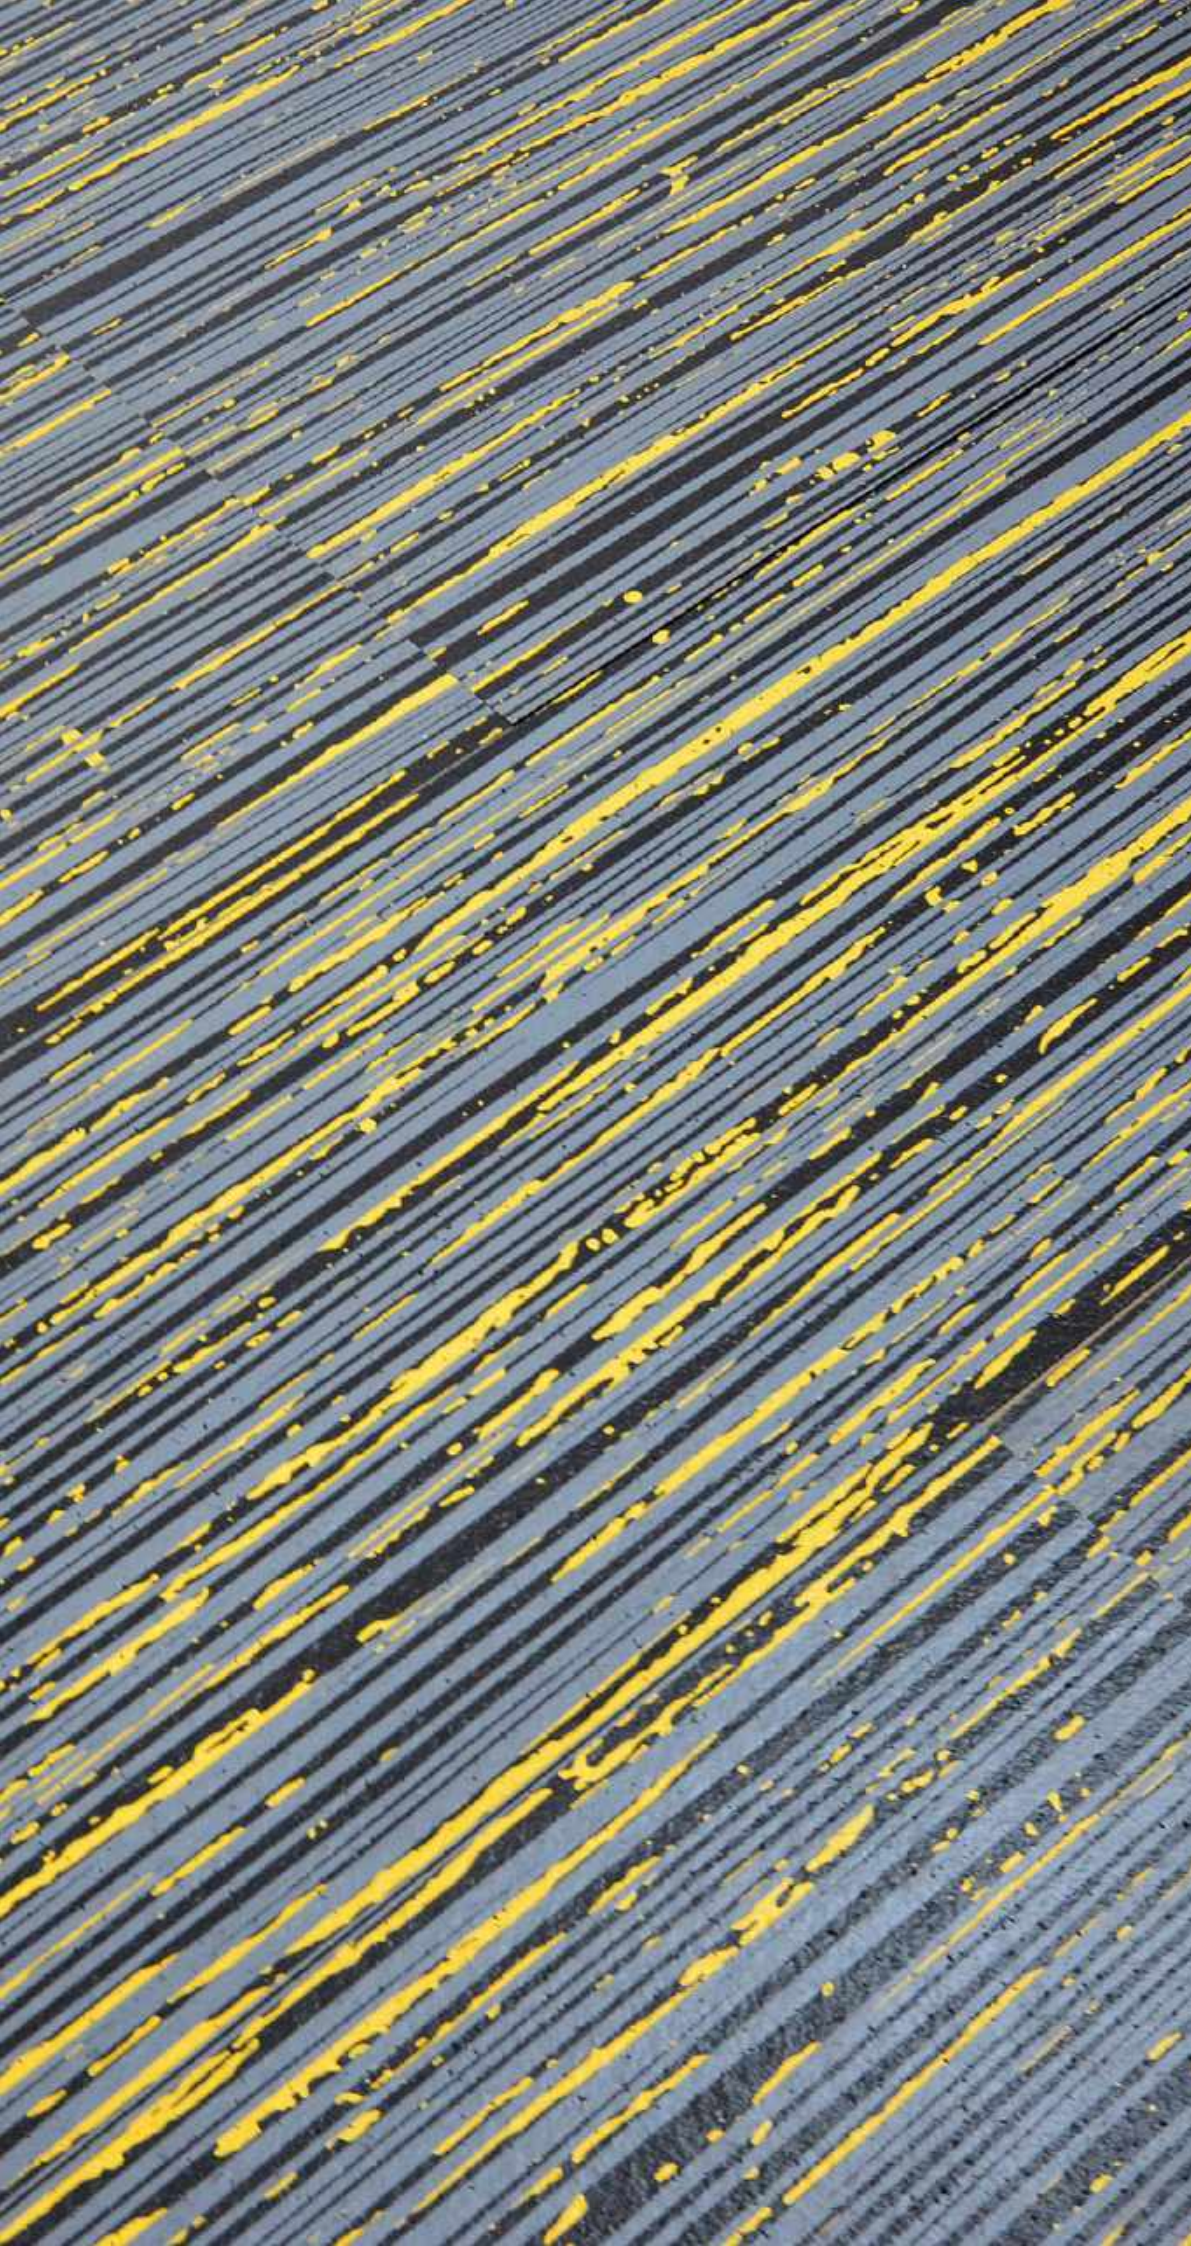

Color
488 SK12 LN06

Thickness
10 mm

Installation
Random

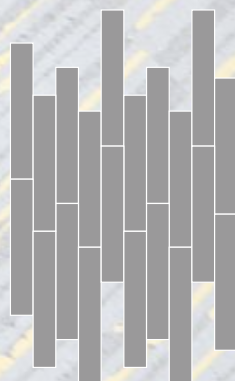



Colors

488 SK05 LN07

488 SK14 LN05


Thickness

6 mm

Installation

Random & Cut to Contour




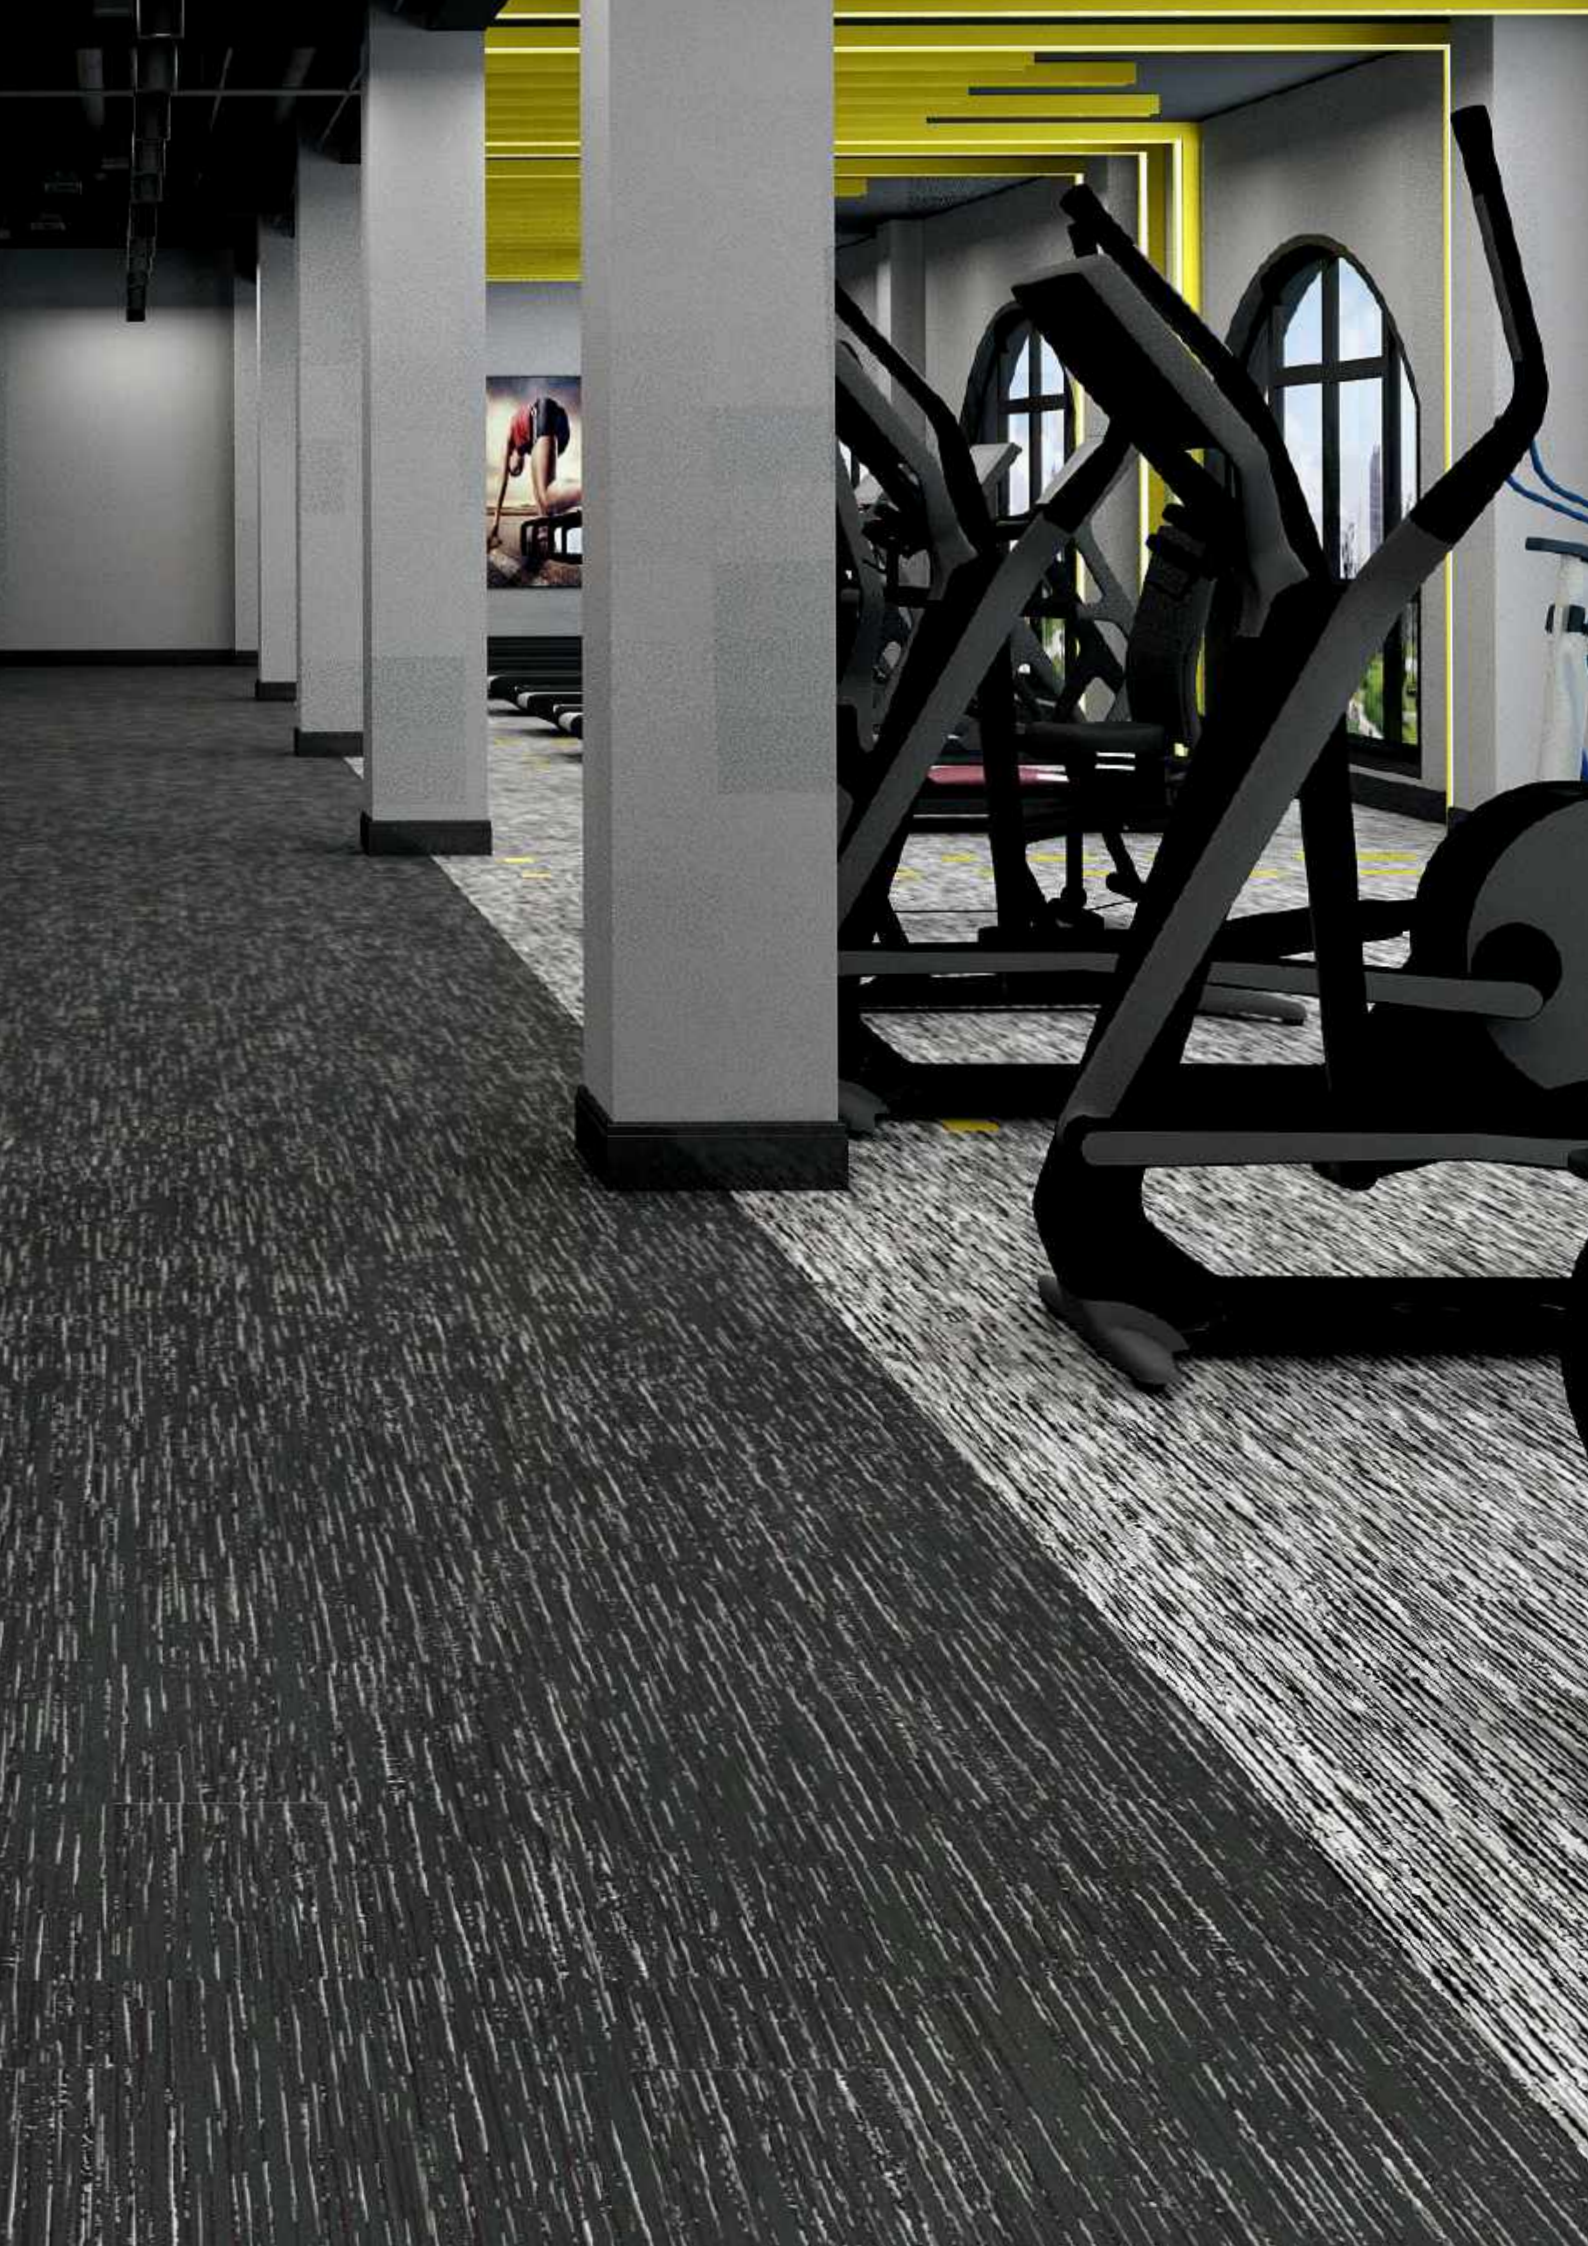

Standard Colors.

Neoflex Striation Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.

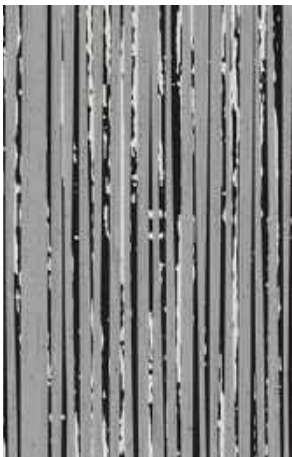

488 SK14 LN05



488 SK14 LN06



488 SK14 LN07



488 SK14 LN08



488 SK14 LN15



488 SK14 LN16



488 SK14 LN17



488 SK14 N18



488 SK14 LN02



488 SK14 LN09



488 SK14 LN11



488 SK14 LN19



488 SK05 LN06



488 SK05 LN08



488 SK05 LN07



488 SK06 LN07



488 SK08 LN06



488 SK08 LN07



488 SK15 LN16



488 SK15 LN17



488 SK15 LN18



488 SK15 LN07



488 SK16 LN17



488 SK16 LN18



488 SK16 LN07



488 SK17 LN18



488 SK17 LN07




488 SK18 LN07



488 SK09 LN06



488 SK19 LN06

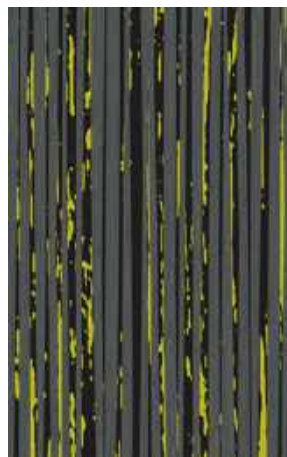

488 SK12 LN06



488 SK02 LN04



488 SK04 LN07



488 SK10 LN11



488 SK09 LN20



488 SK20 LN07



488 SK15 LN06



488 SK16 LN06



488 SK05 LN18



488 SK06 LN18



488 SK16 LN08



488 SK08 LN20



488 SK15 LN05




488 SK18 LN07


Installation Options.

Neoflex Striation Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


Random

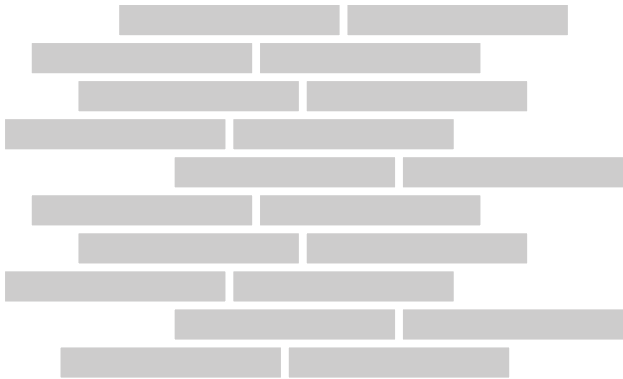


2-Color Random

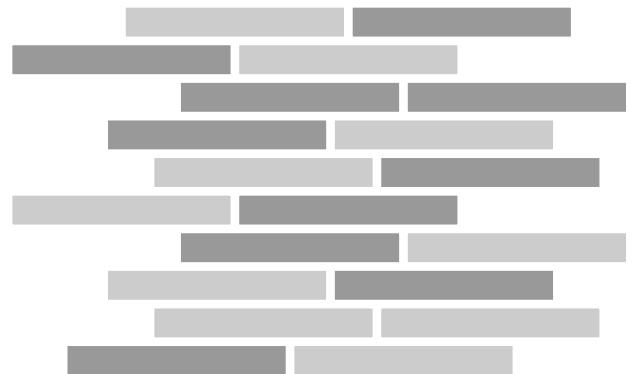


2-Color Random

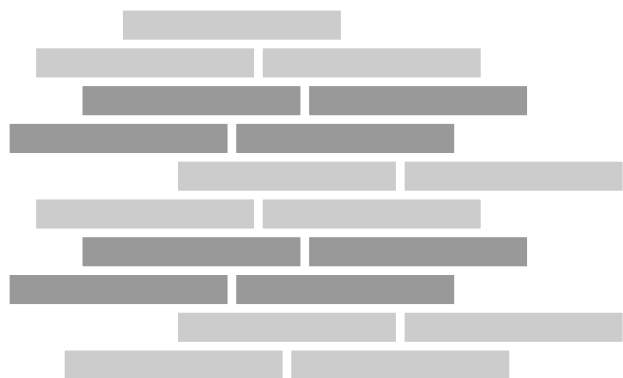


2-Color Random

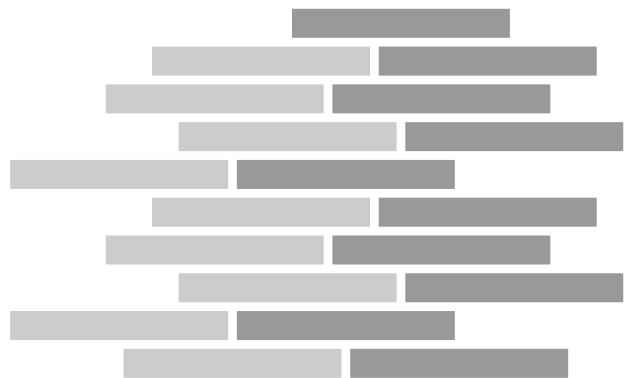


3-Color Random

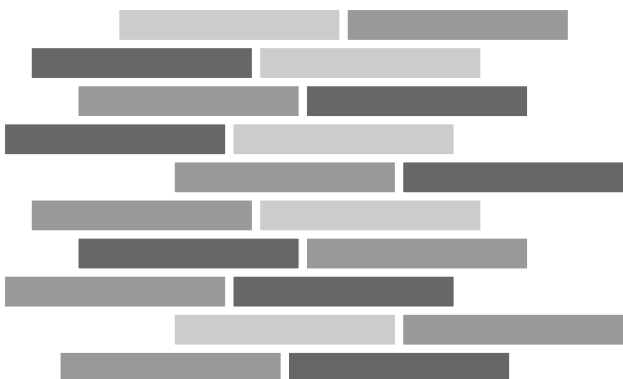


Herringbone

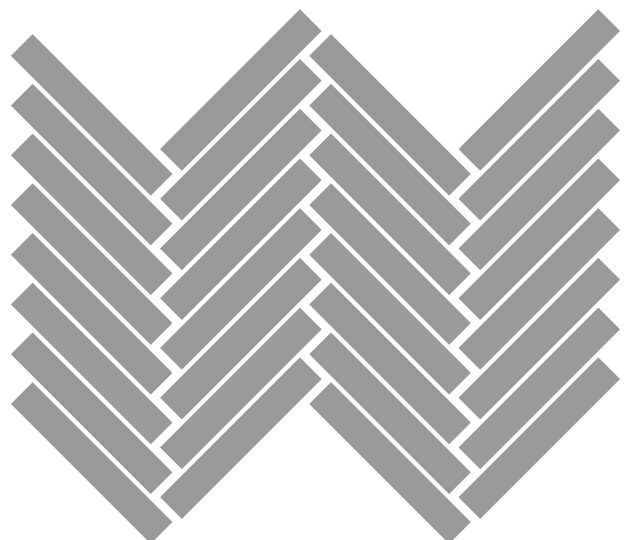


2-Color Herringbone

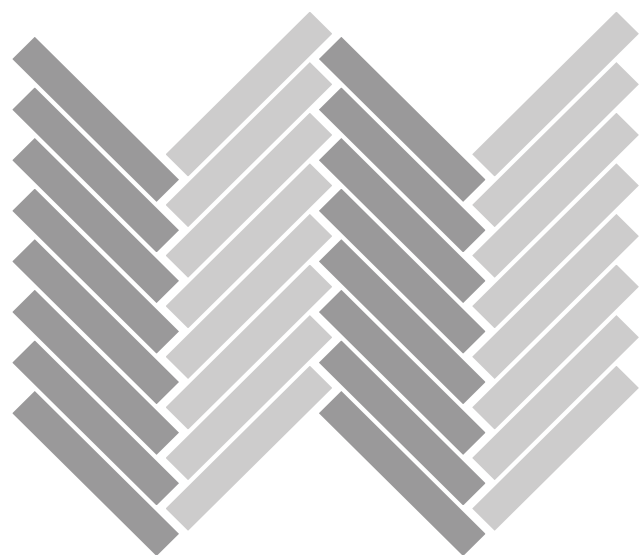


2-Color Herringbone

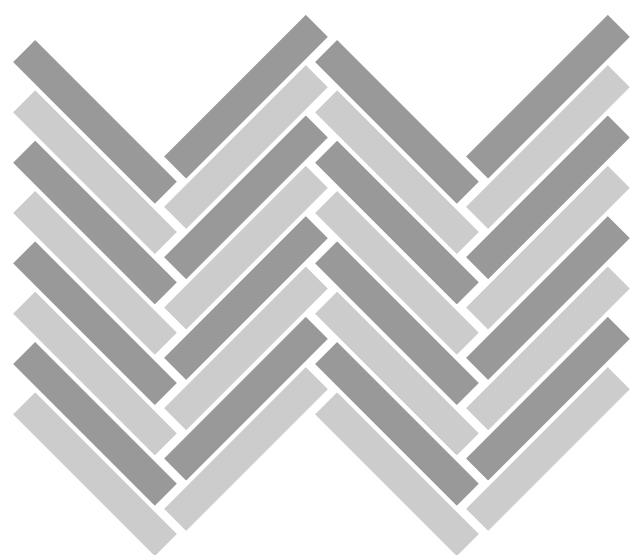


Checkerboard

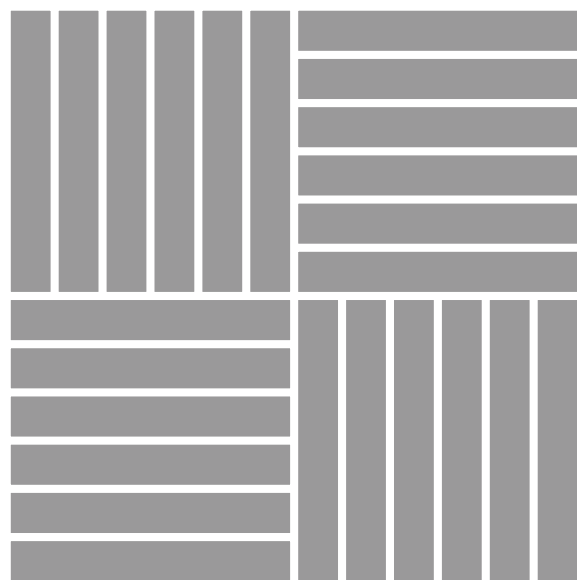

2-Color Checkerboard

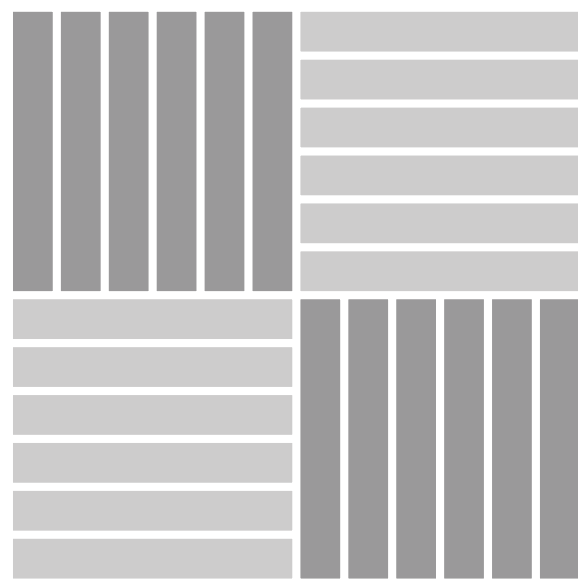

2-Color Checkerboard

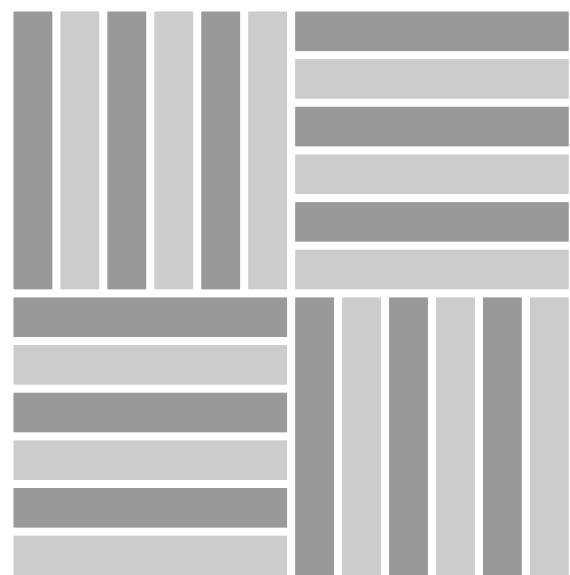

2-Color Checkerboard



Technical Specifications.


Neoflex Striation Fitness Flooring is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC, hardwood, laminated wood or EVA foam.

Property	Standard	Result
Thickness		2.5 mm, 6 mm, 8 mm, 10 mm
Dimensions		1200 mm x 200 mm
Weight		± 4.65 kg/sqm
Hardness	ISO 7619-1:2010	62.1° Shore A
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate
Dynamic Coefficient of Friction	EN 13893:2012	0.7
Light Fastness	ISO 105-B02:2013	7-8 Grade
Residual Indentation	ISO 24343-1:2002	0.18 mm
Dimensional Stability	ISO 23999:2012	0.5%
Flammability	EN 13501-1	Efl (Optional Cfl-s1)
Installation		Stikibak™ or Full-Bond


Standard Thicknesses.


Neoflex Striation Series is manufactured in 4 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EPDM top layer. 6mm, 8mm and 10mm thicknesses consist of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

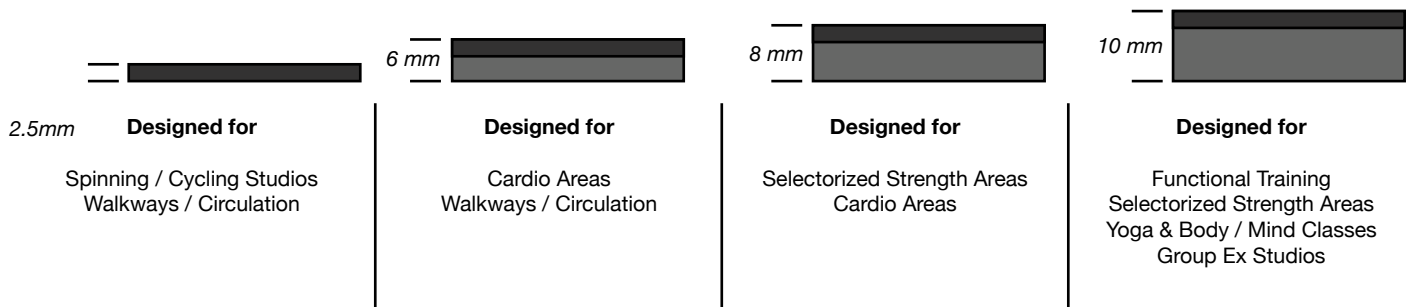

If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Striation Series can be adhered on top.

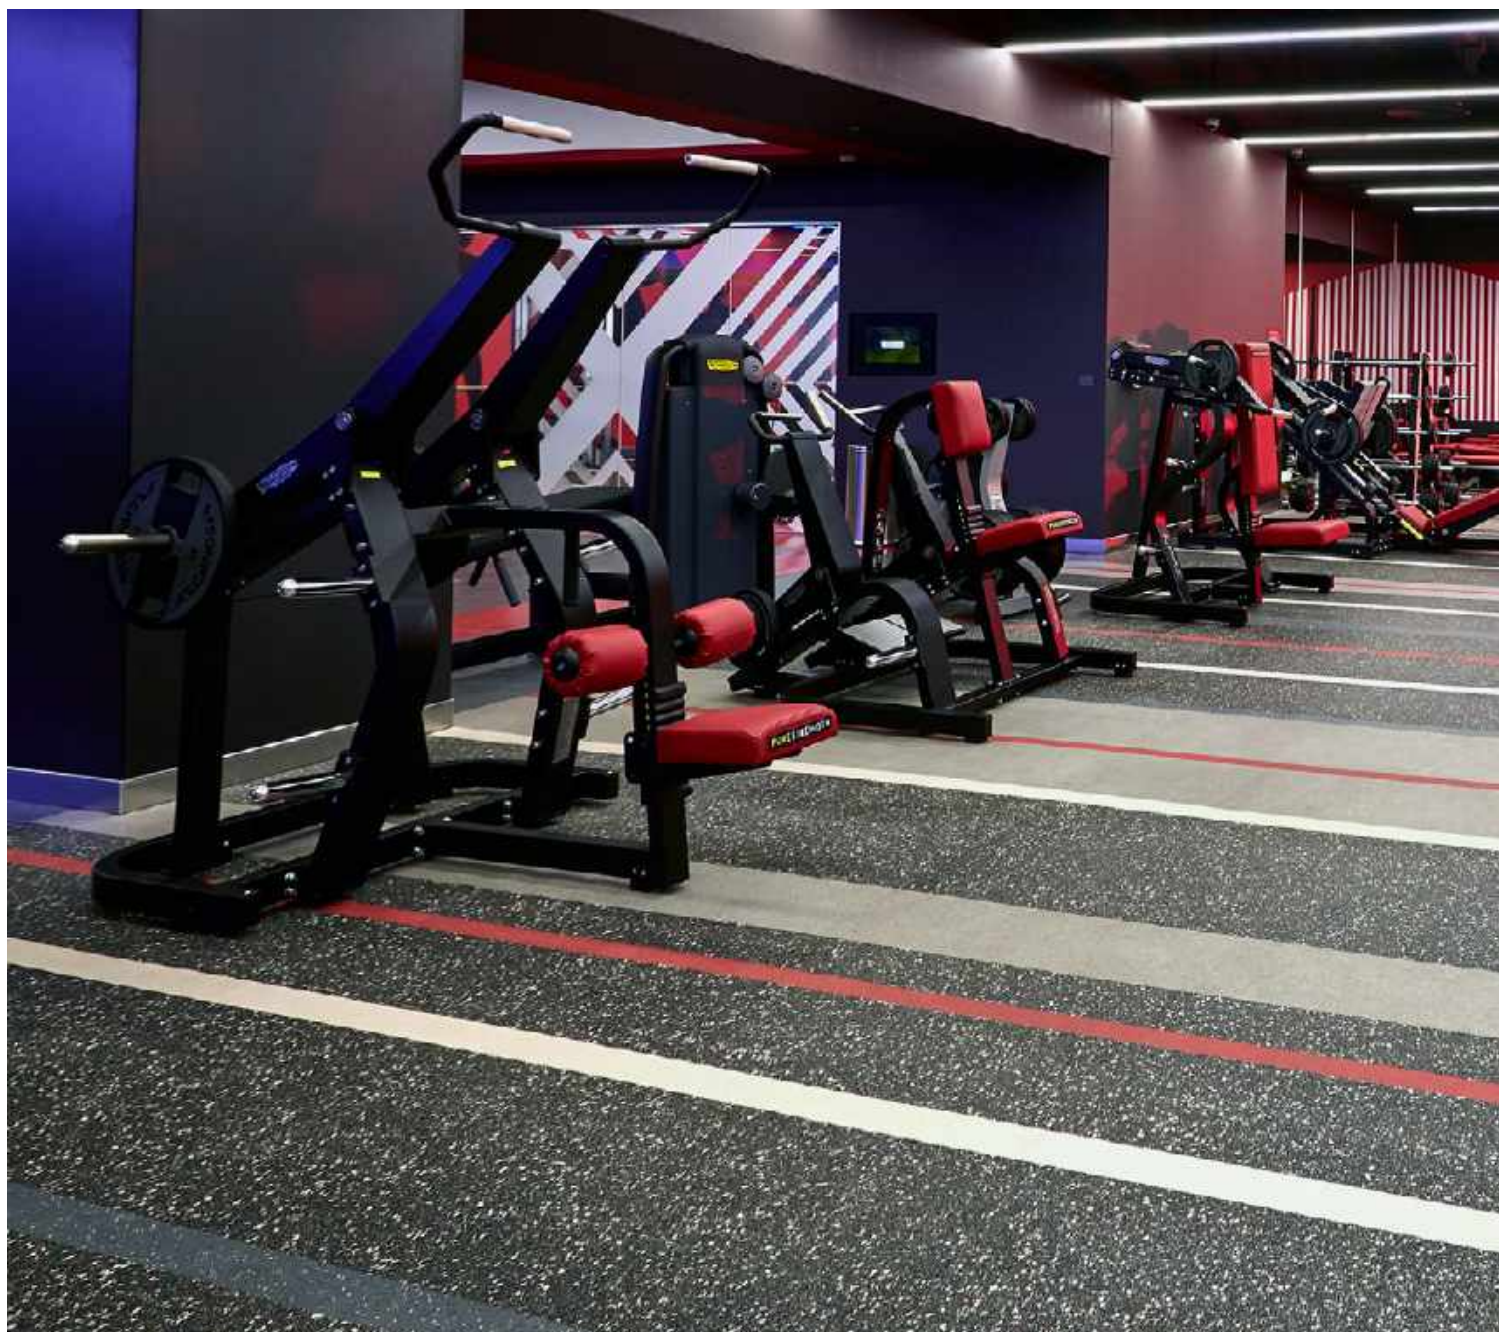

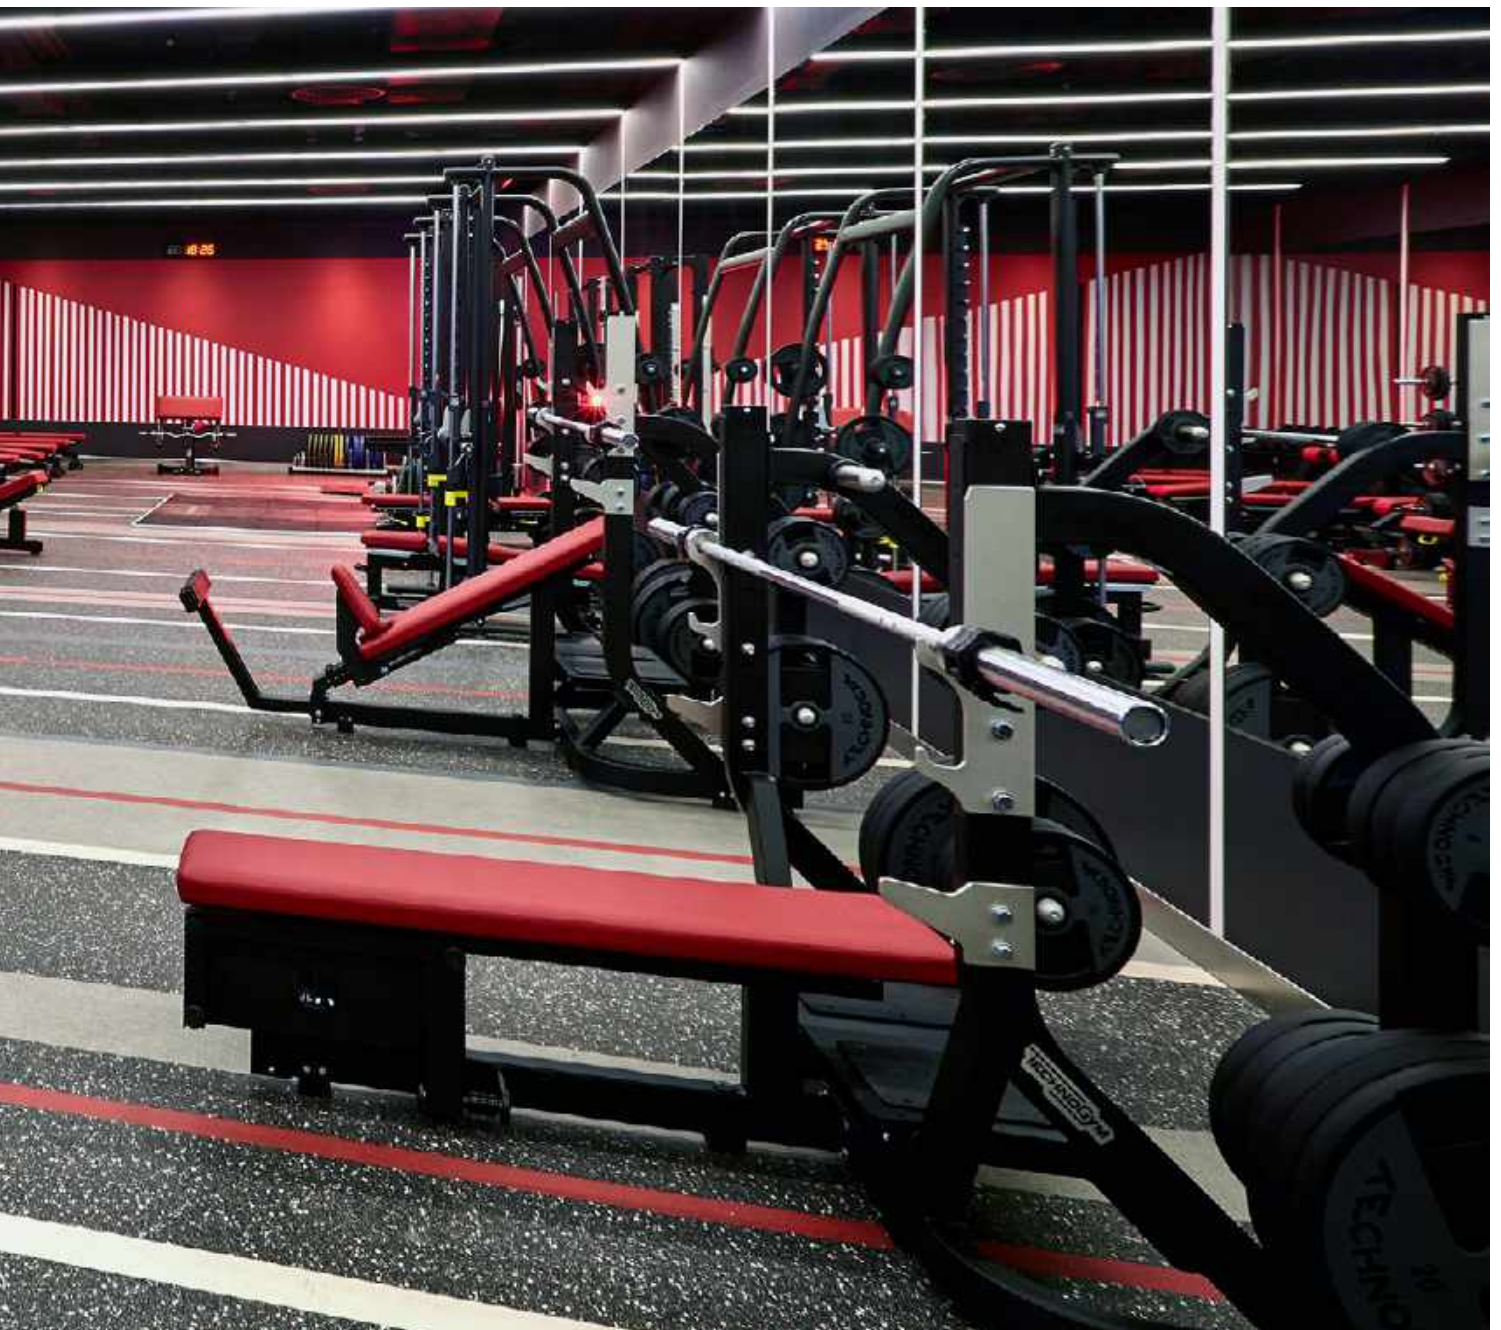

Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Striation Series.

Rephouse manufactures a complete range of Fitness Flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.



www.rephouse.com



info@rephouse.com



[@rephouse](https://www.facebook.com/rephouse)



[@rephouse](https://www.instagram.com/rephouse)

