

RUBBER FLOORING
IN PLANKS

NEOFLEX
CROSSHATCH
SERIES



Neoflex Crosshatch Series.

Neoflex™ Crosshatch Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor commercial settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Rubber Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.






Color
488 CX15 HT16

Thickness
6 mm

Installation
Random


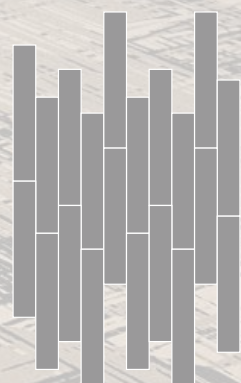




Color
488 CX10 HT11

Thickness
2.5 mm


Installation
Random

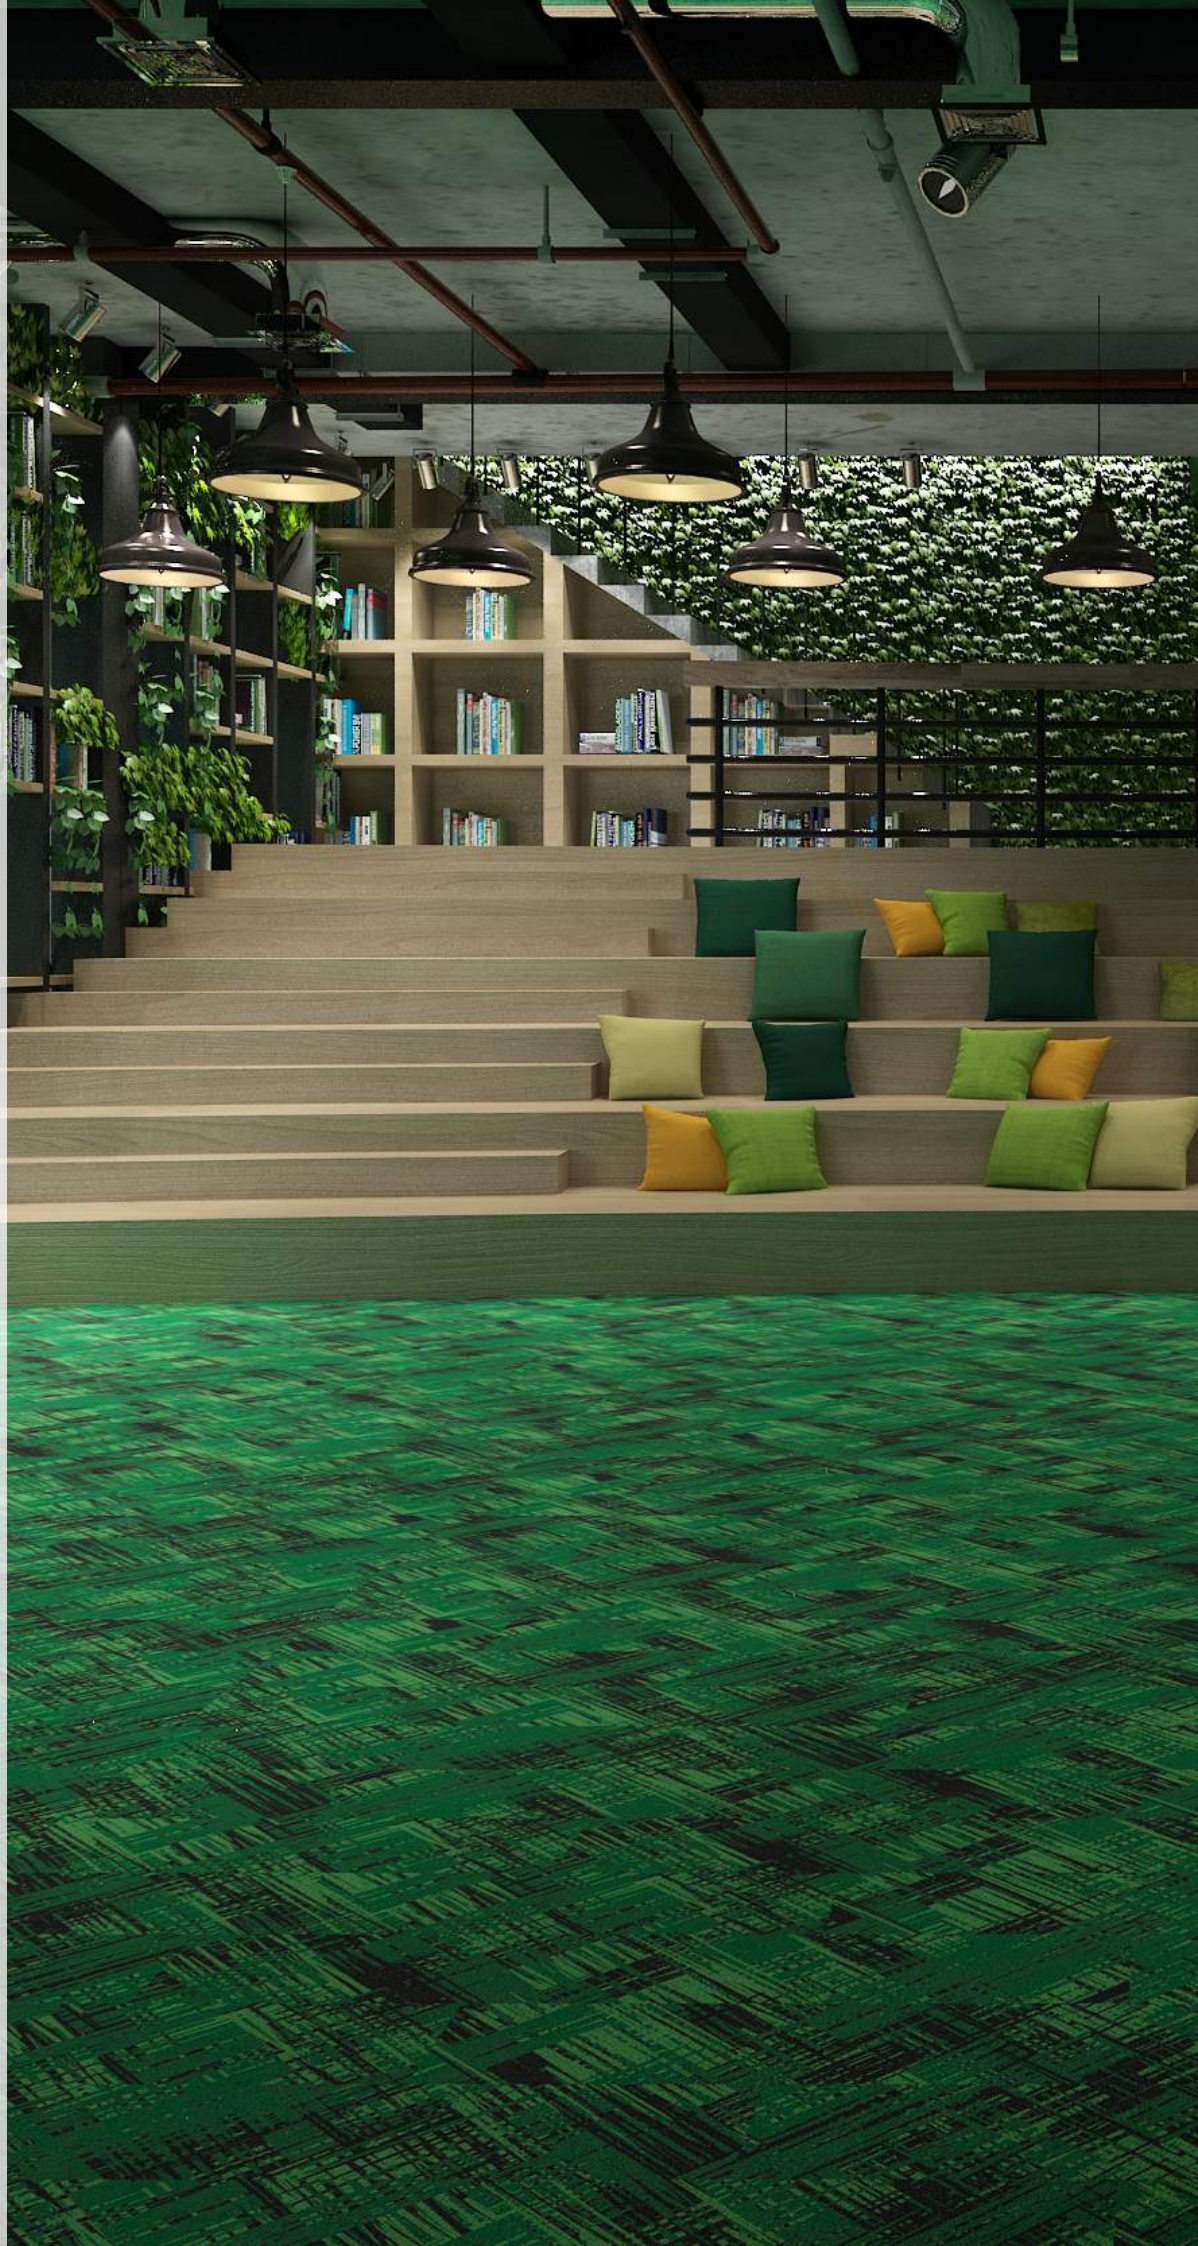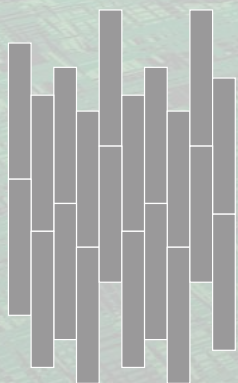

Inspired by Art.

Inspired by traditional artistic shading methods, Neoflex Crosshatch Series is designed to add depth and texture to a floor, creating a memorable aesthetic.

Neoflex Crosshatch Series showcases outstanding color combinations across its 28 colorways, giving the floor a strong presence that is both dramatic, tonal and profound.

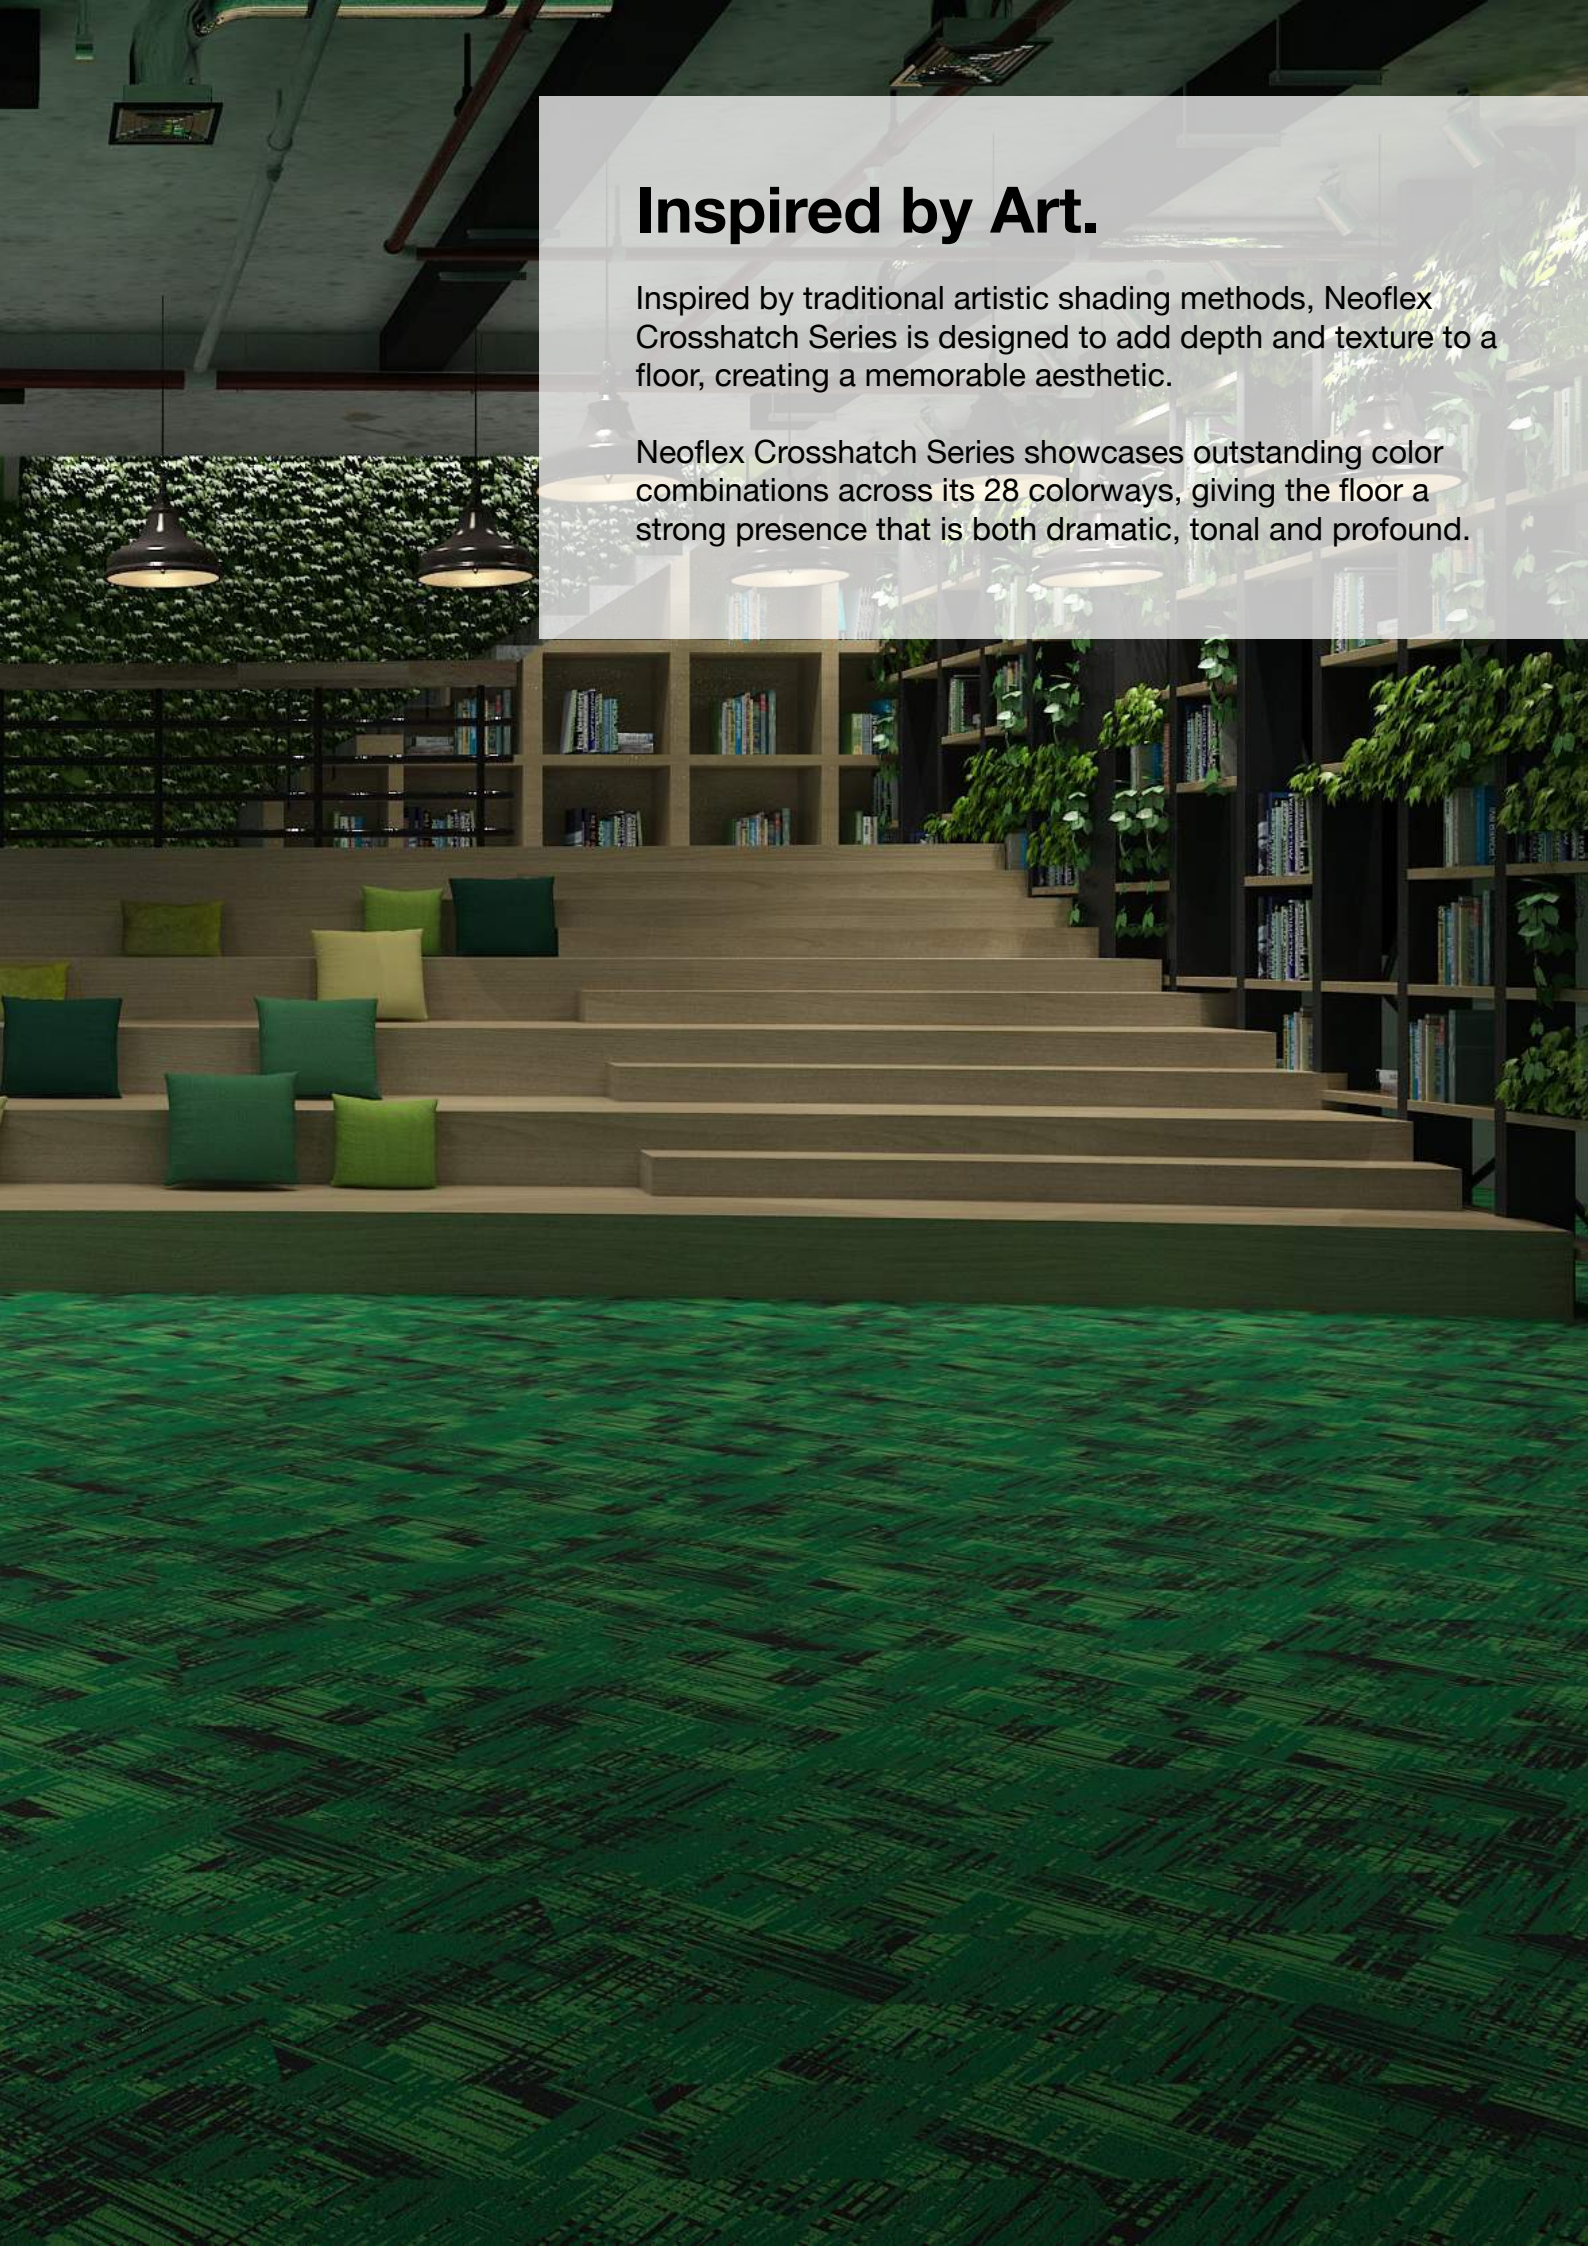




Colors
488 CX16 HT17

Thickness
6 mm

Installation
Random

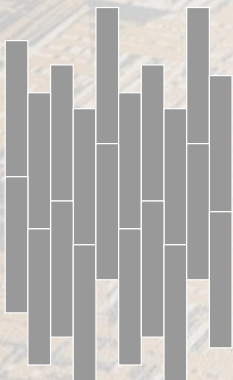





Fit for Purpose.

Neoflex Crosshatch Series is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.

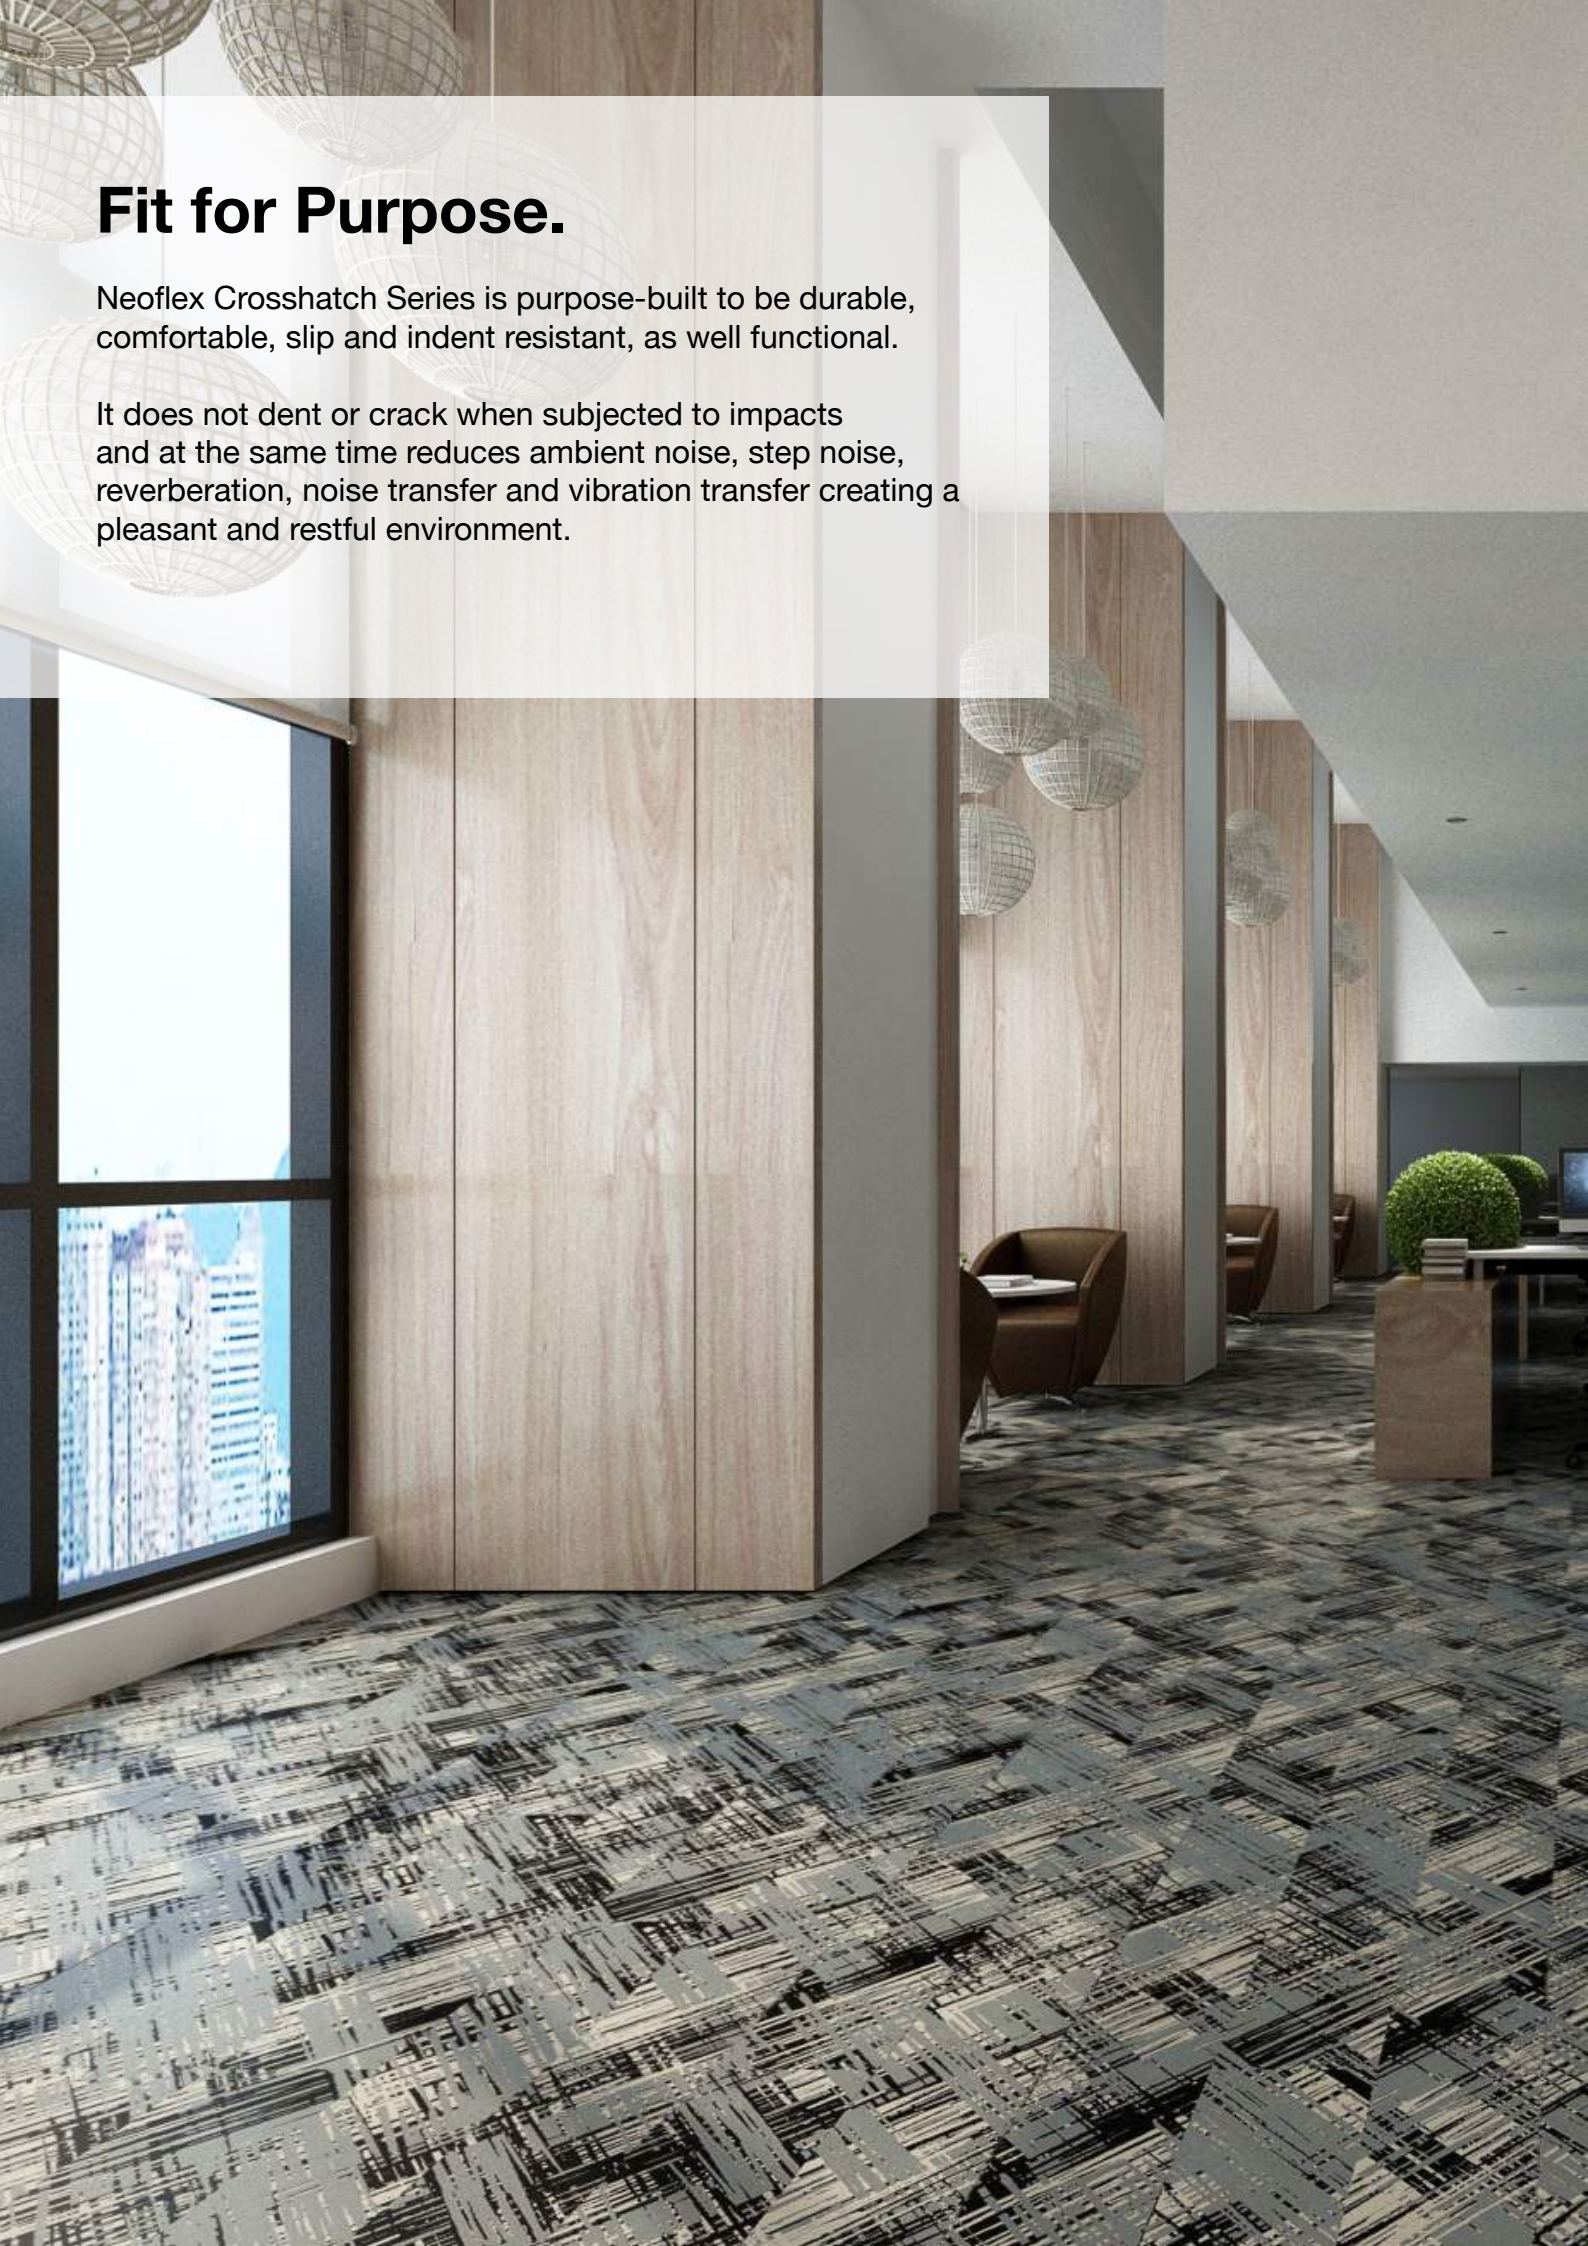

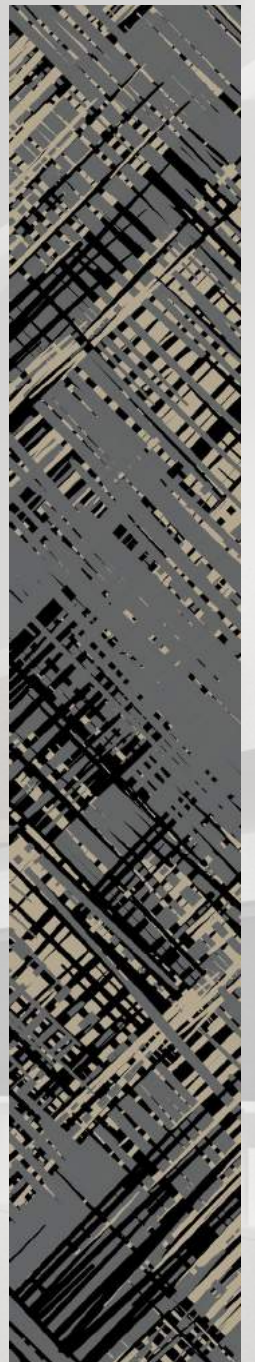

Color
488 CX16 HT06

Thickness
6 mm

Installation
Random






Color
488 CX16 HT11


Thickness
2.5 mm

Installation
Random

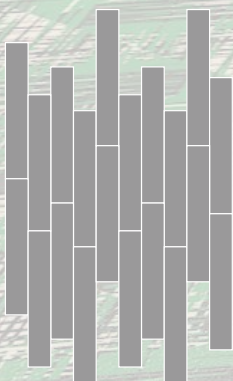






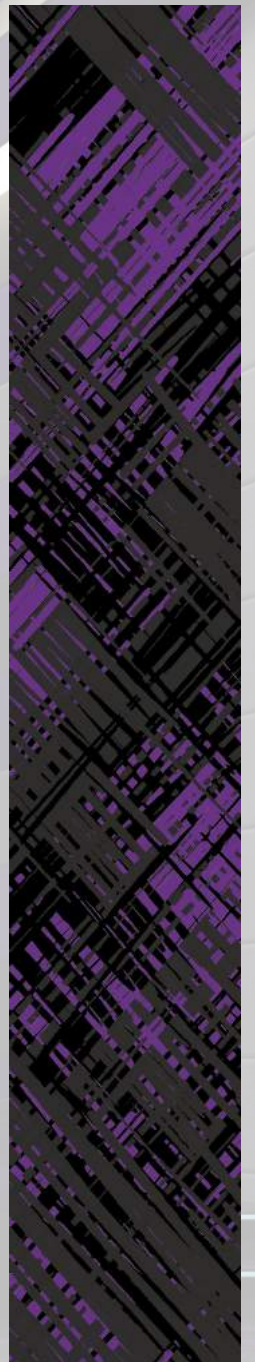


Color
488 CX19 HT07

Thickness
2.5 mm

Installation
Random

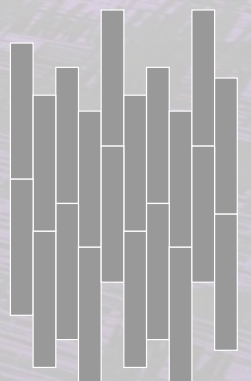


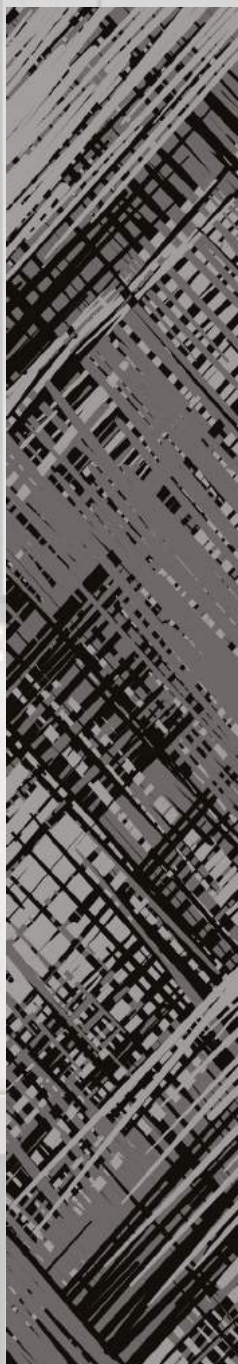

Color
488 CX05 HT06

Thickness
2.5 mm



Installation
Random

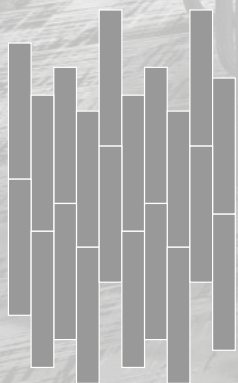

In A Unique Format.

Neoflex Crosshatch Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truly sophisticated floor can be created that avoids repetition.

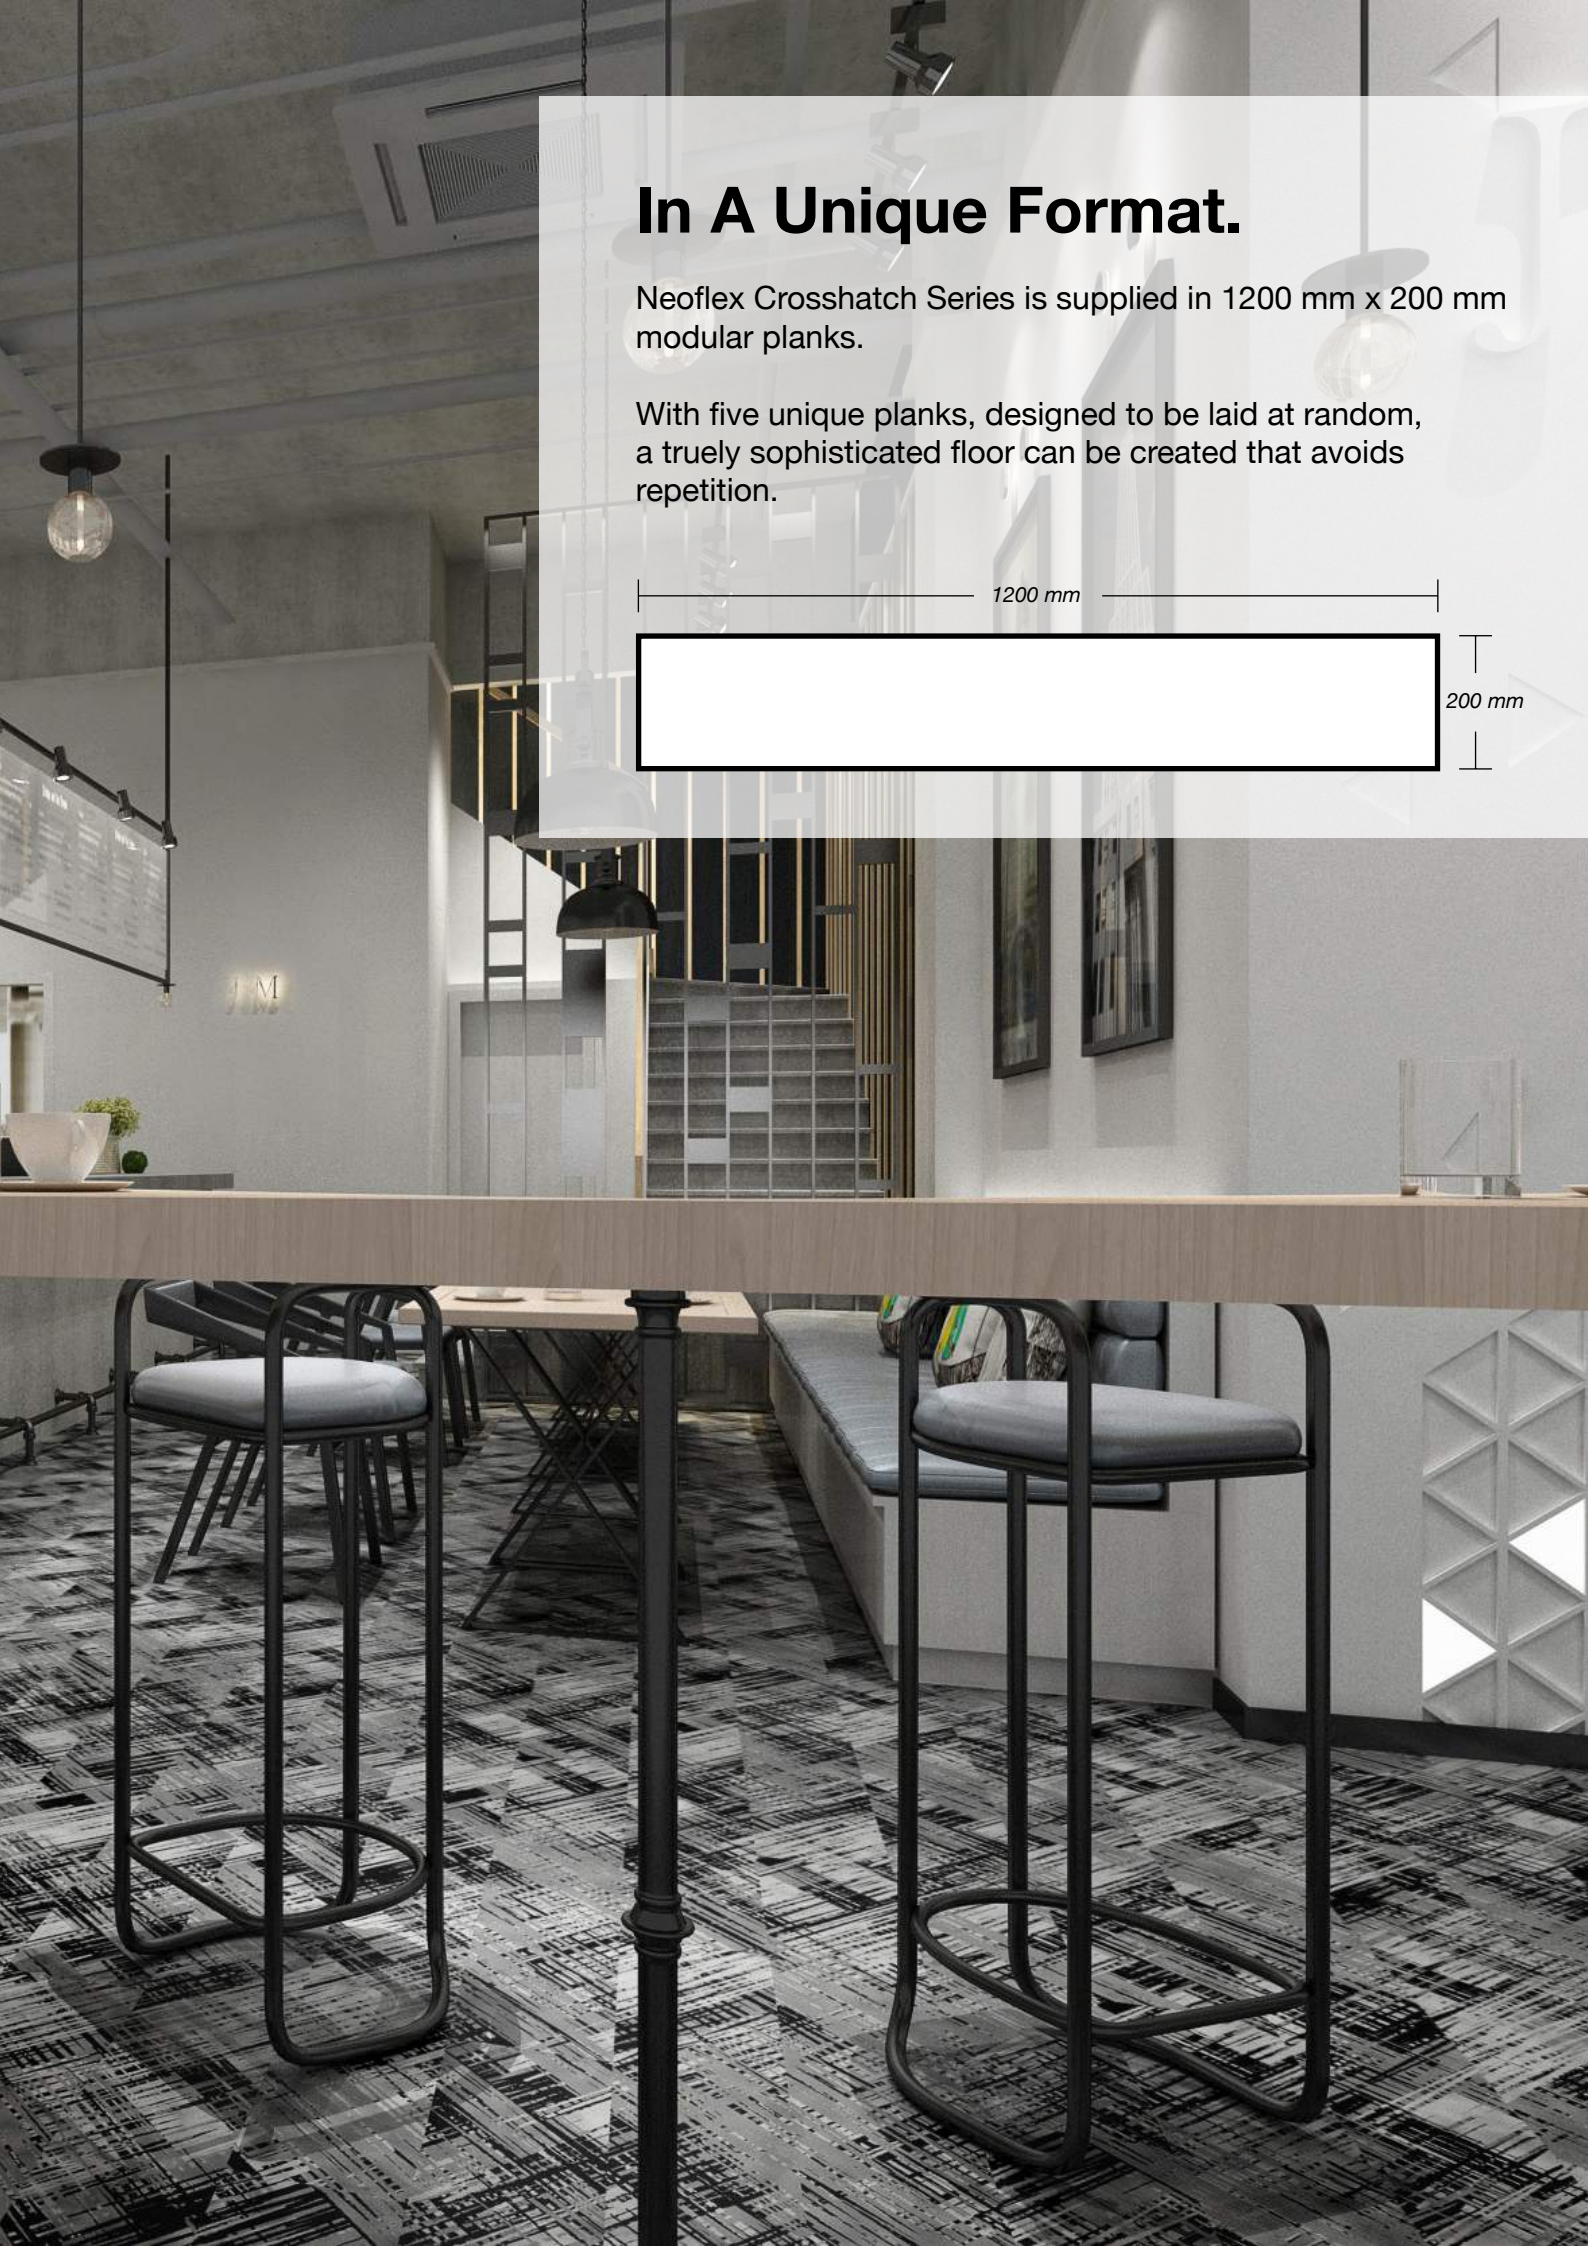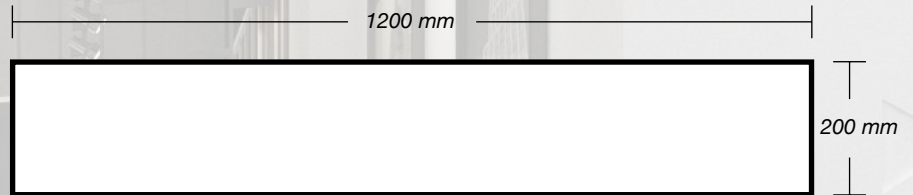







Color
488 CX09 HT20

Thickness
2.5 mm

Installation
Random

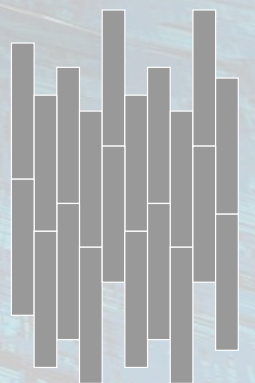


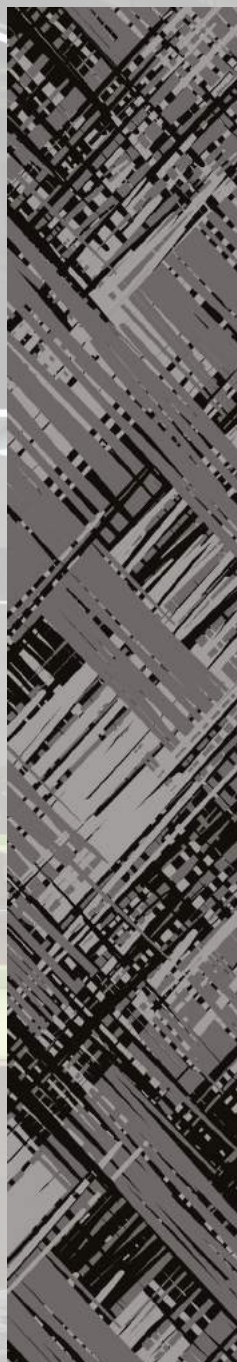

Colors
488 CX05 HT06


Thickness
2.5 mm

Installation
Random

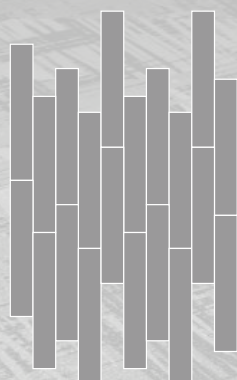






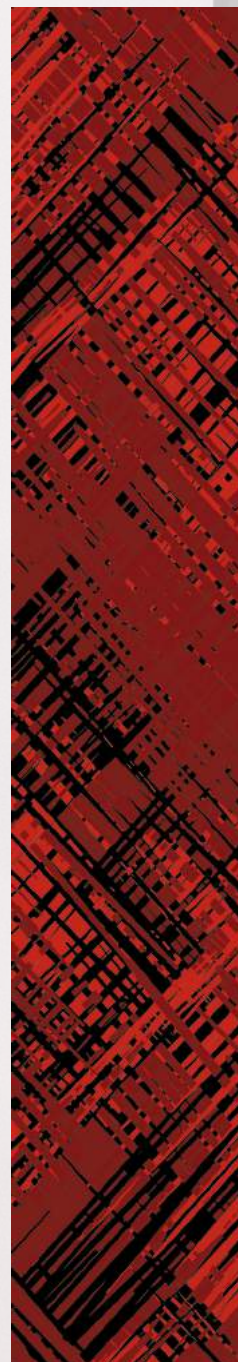


Color
488 CX02 HT04

Thickness
6 mm

Installation
Random

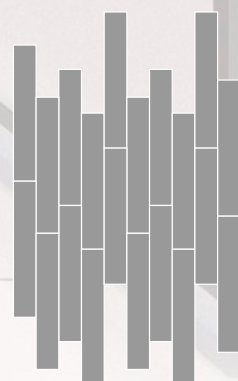


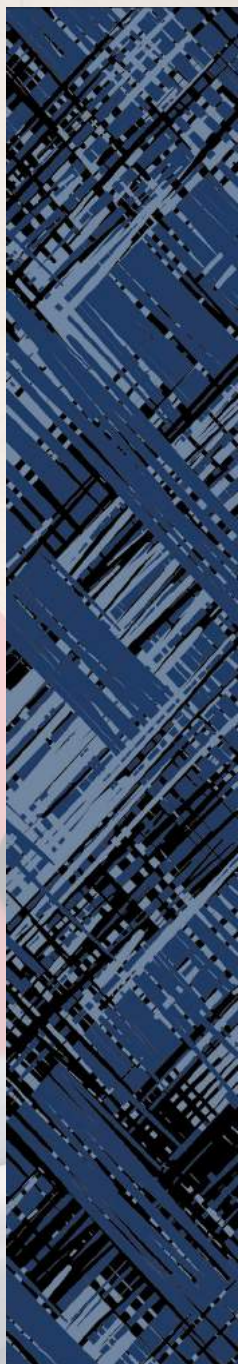

Color
488 CX08 HT20

Thickness
6 mm

Installation
Random

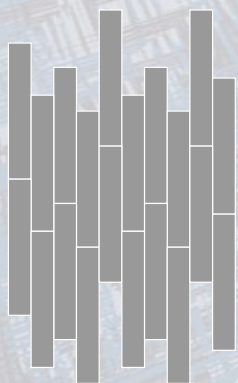



Standard Colors.

Neoflex Crosshatch Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.


The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.



488 CX02 HT04



488 CX03 HT07

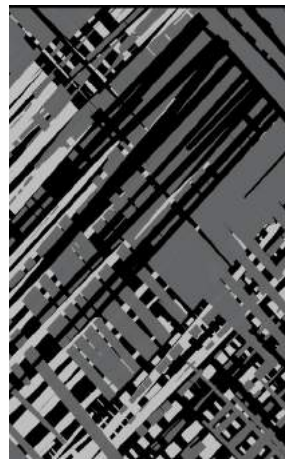

488 CX05 HT06



488 CX05 HT07



488 CX05 HT16



488 CX05 HT18




488 CX06 HT04



488 CX06 HT07




488 CX06 HT18

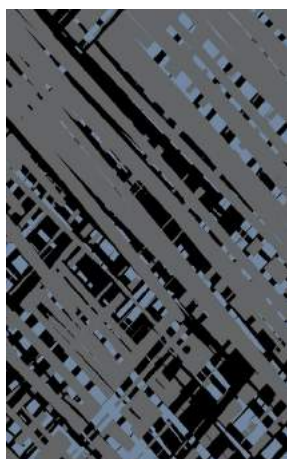

488 CX08 HT06



488 CX08 HT19

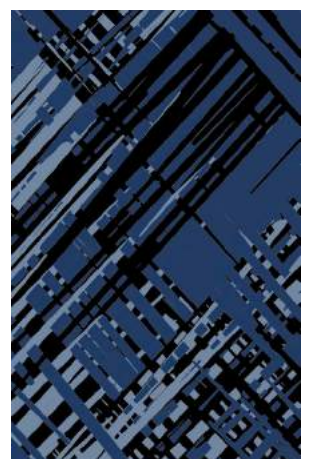

488 CX08 HT20



488 CX09 HT20



488 CX10 HT07



488 CX10 HT11



488 CX15 HT05




488 CX15 HT16




488 CX15 HT17



488 CX15 HT18

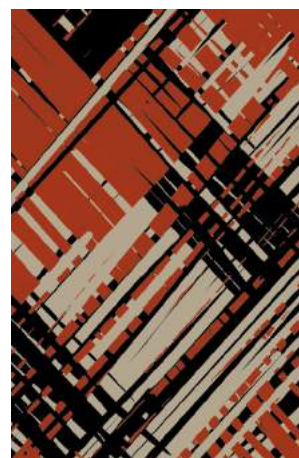


488 CX16 HT01

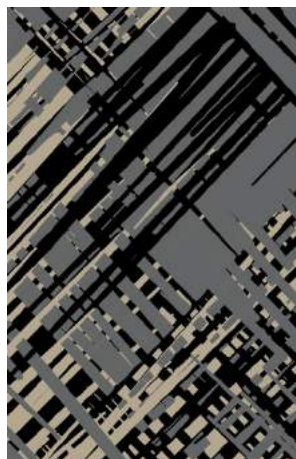


488 CX16 HT06




488 CX16 HT07

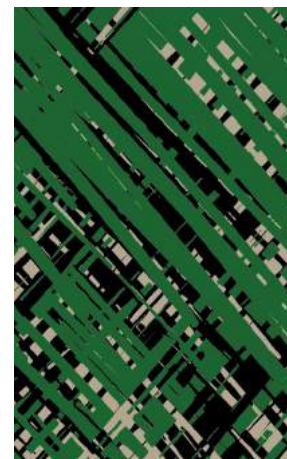


488 CX16 HT11

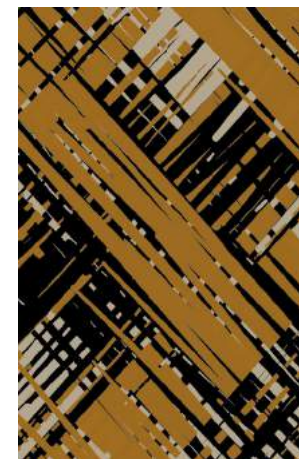


488 CX16 HT17

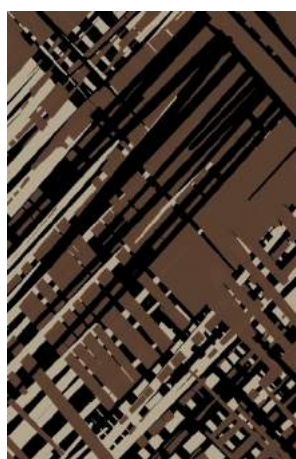


488 CX16 HT18

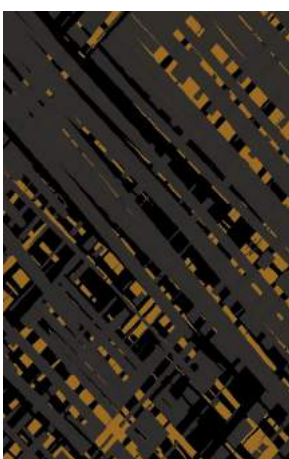

488 CX17 HT07

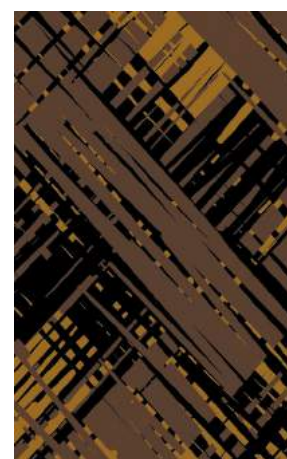

488 CX17 HT18

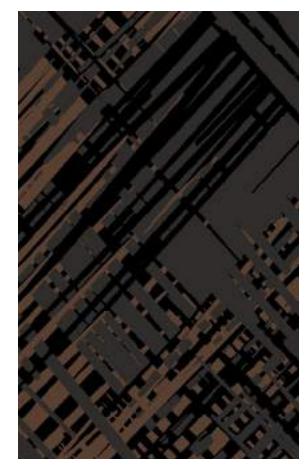


488 CX18 HT07


Installation Options.

Neoflex Crosshatch Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


Random

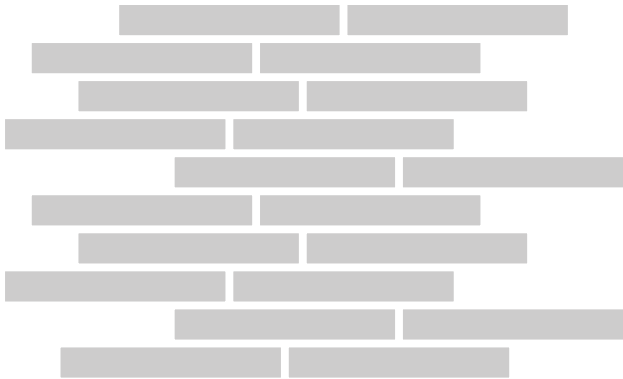


2-Color Random

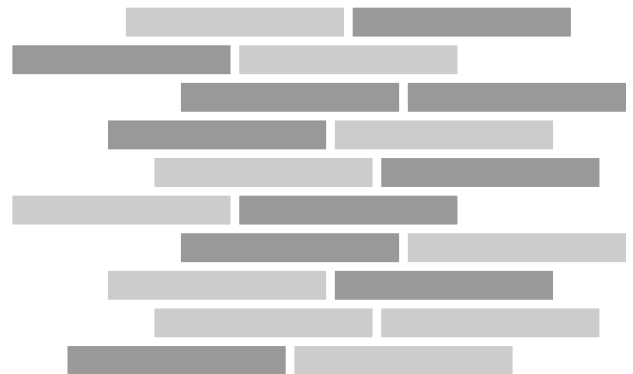


2-Color Random

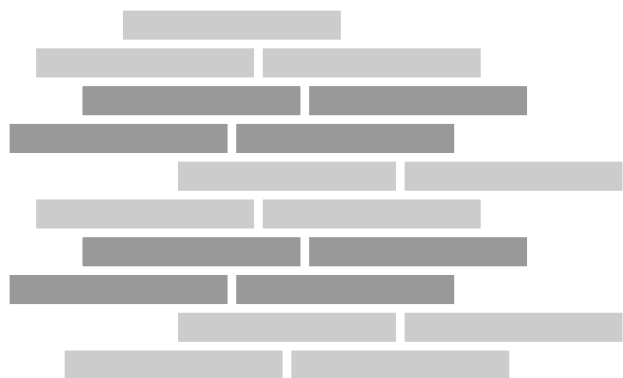

2-Color Random

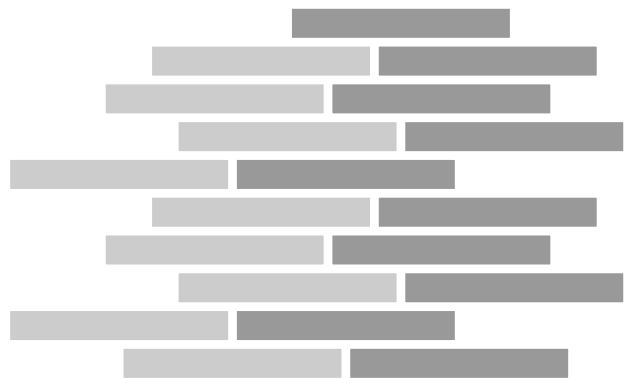

3-Color Random

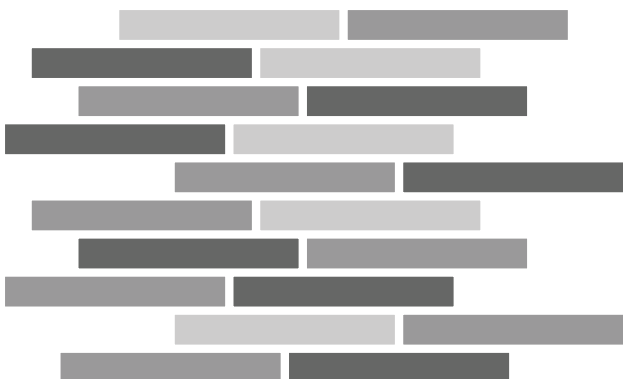

Technical Specifications.

Neoflex Crosshatch Series is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC, hardwood, laminated wood or EVA foam.

Property	Standard	Result	
Dimensions		1200 mm x 200 mm	
Thickness		2.5 mm	6 mm
Weight		± 3.5 kg/m ²	± 5.95 kg/m ²
Hardness	ISO 7619-1:2010	62.1° Shore A	
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction	
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate	
Dynamic Coefficient of Friction	EN 13893:2012	0.7	
Light Fastness	ISO 105-B02:2013	7-8 Grade	
Residual Indentation	ISO 24343-1:2002	0.18 mm	
Dimensional Stability	ISO 23999:2012	0.5%	
Flammability	EN 13501-1	Efl (Optional Cfl-s1)	
Installation		Stikibak™ or Full-Bond	

Standard Thicknesses.

Neoflex Crosshatch Series is manufactured in 2 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EPDM top layer. 6mm thickness consists of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

2.5mm



6 mm



If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Crosshatch Series can be adhered on top.





Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Crosshatch Series.

Rephouse manufactures a complete range of commercial rubber flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.



www.rephouse.com



info@rephouse.com



@rephouse



@rephouse

