RUBBER FLOORING
IN PLANKS

# NEOFLEX INTERWEAVE SERIES

# Neoflex Interweave Series.

Neoflex™ Interweave Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor commercial settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Rubber Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.

***Color***
*488 IN05 AV18*

***Thickness***
*2.5 mm*

***Installation***
*Random*

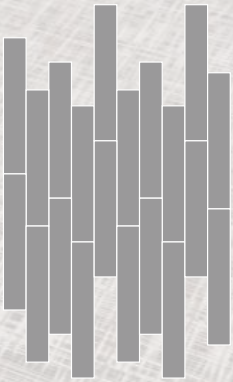

***Color***
*488 IN01 AV04*

***Thickness***
*6 mm*

***Installation***
*Random*

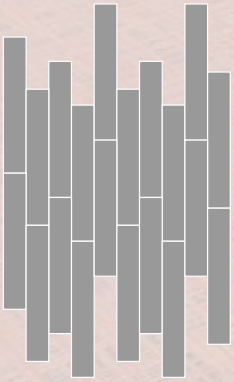

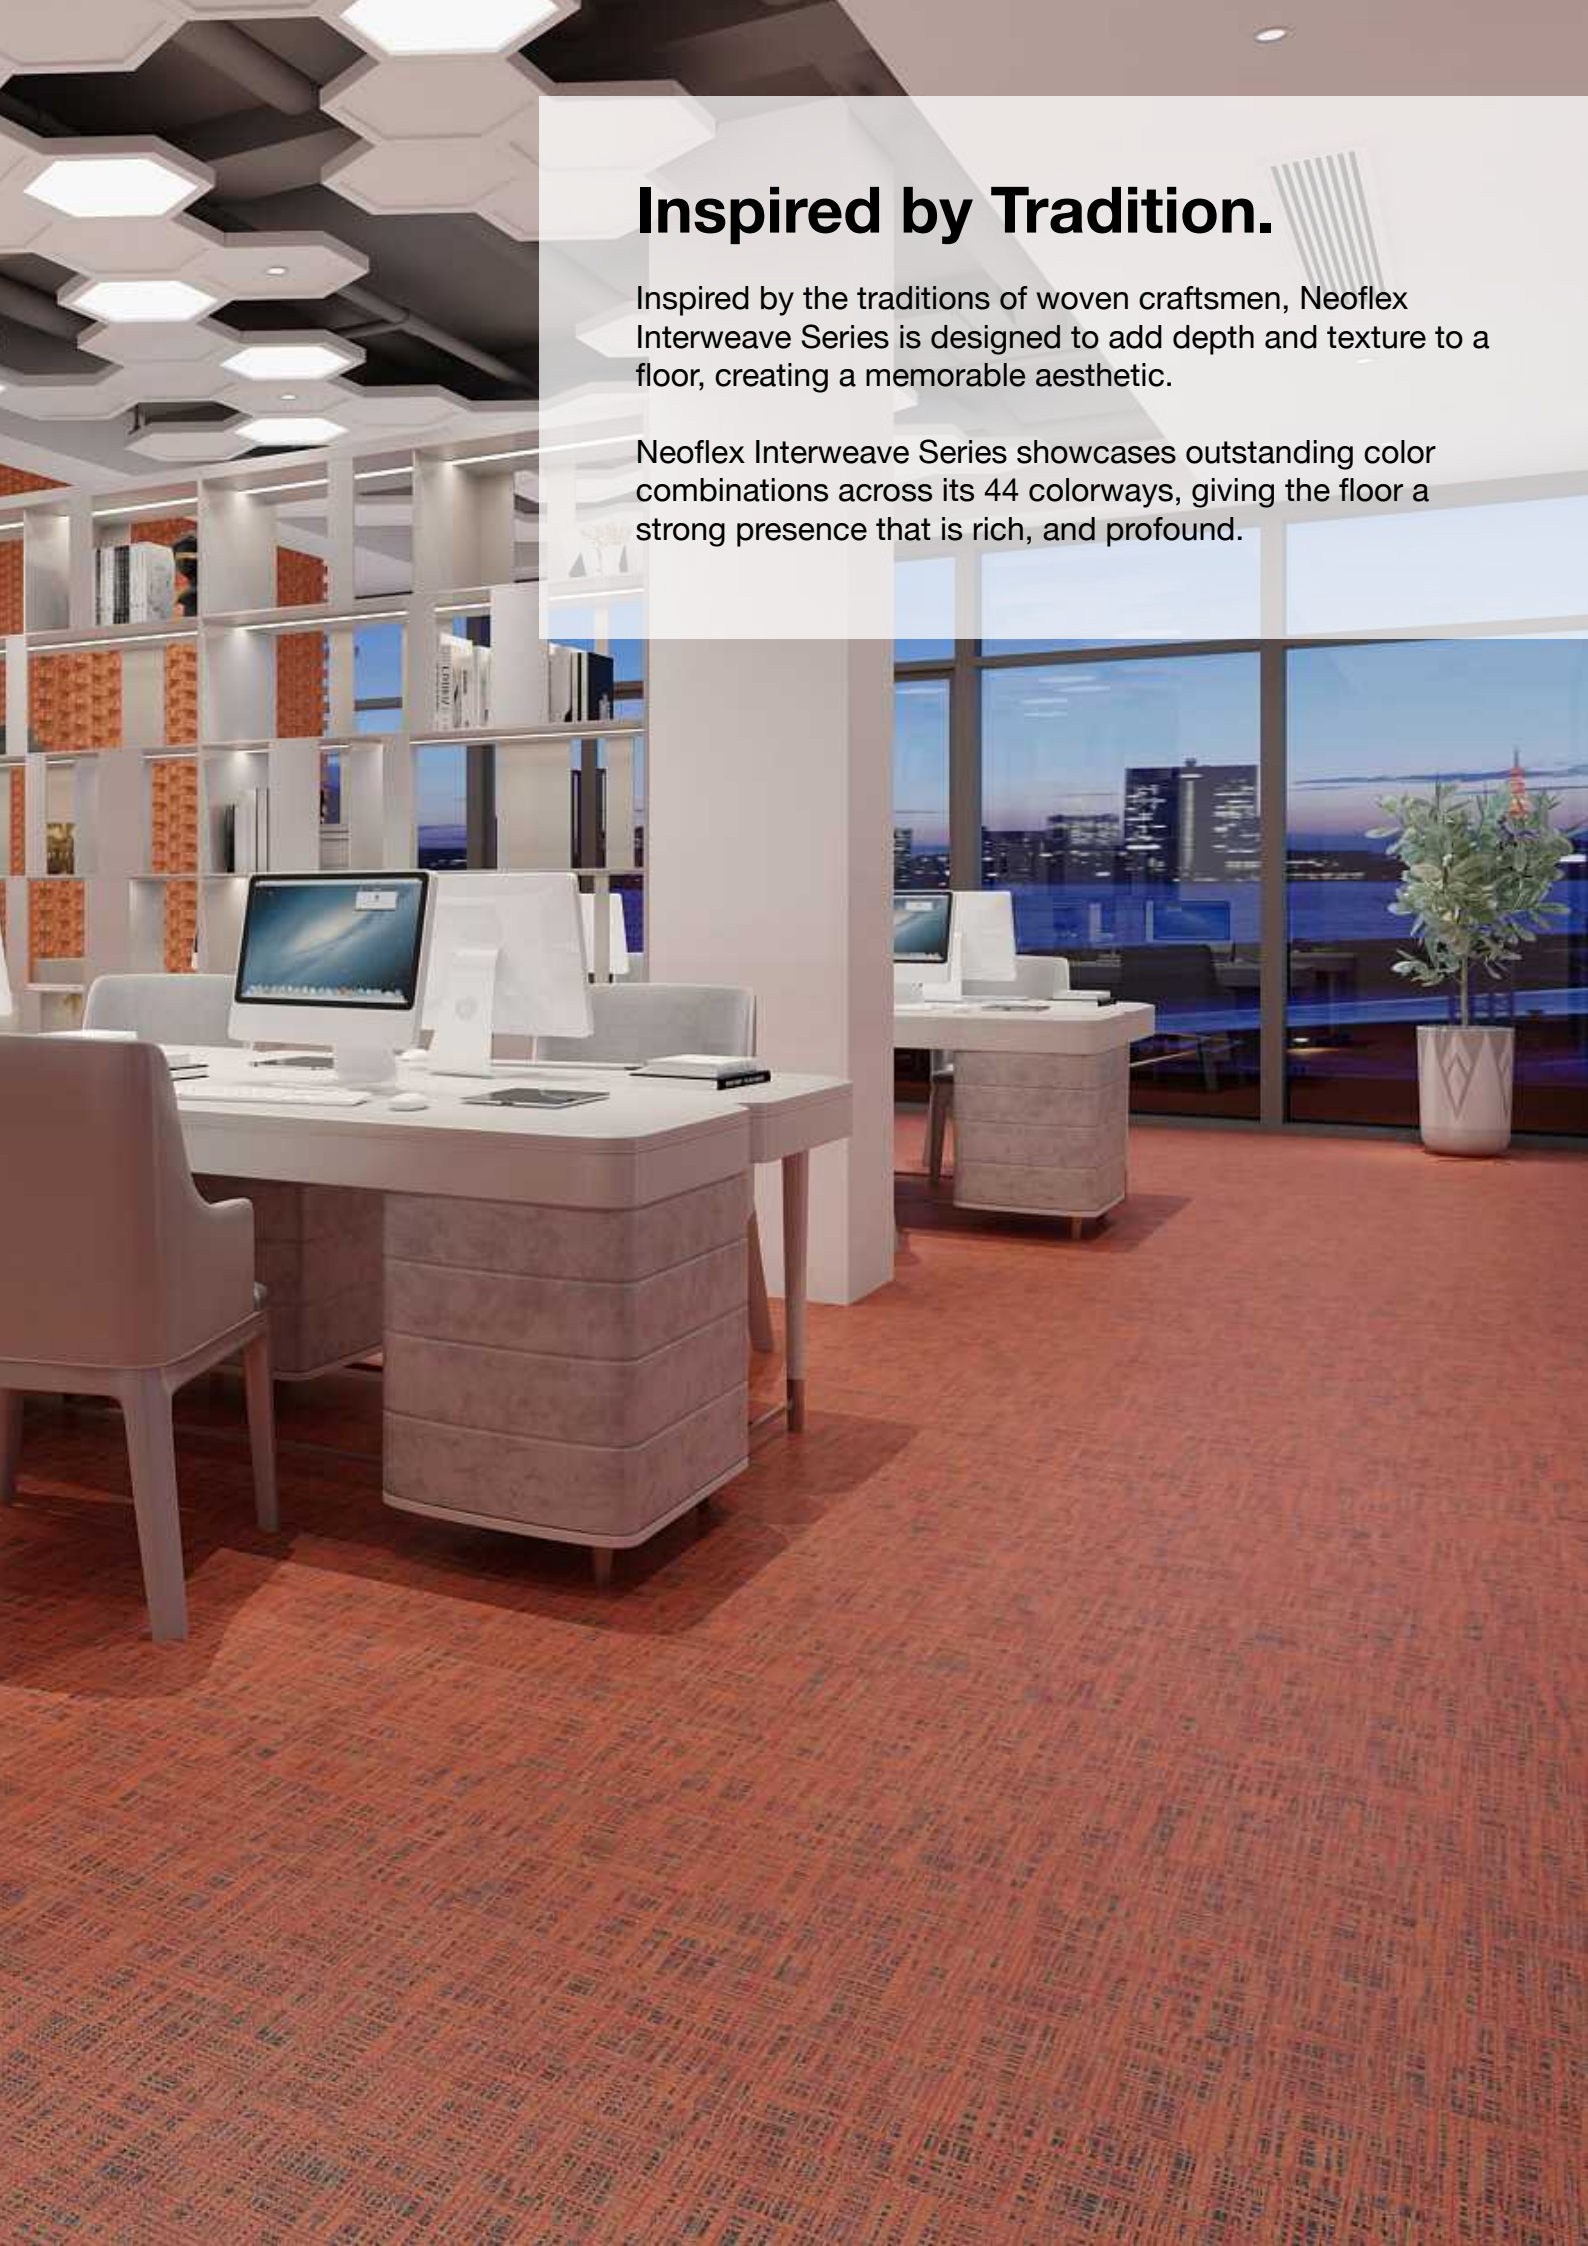

# Inspired by Tradition.

Inspired by the traditions of woven craftsmen, Neoflex Interweave Series is designed to add depth and texture to a floor, creating a memorable aesthetic.

Neoflex Interweave Series showcases outstanding color combinations across its 44 colorways, giving the floor a strong presence that is rich, and profound.



***Color***
*488 IN20 AV07*

***Thickness***
*2.5 mm*

***Installation***
*Random*

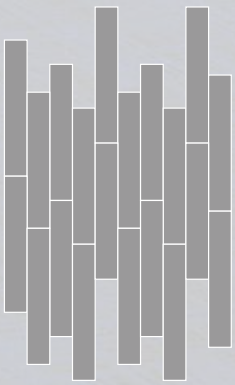

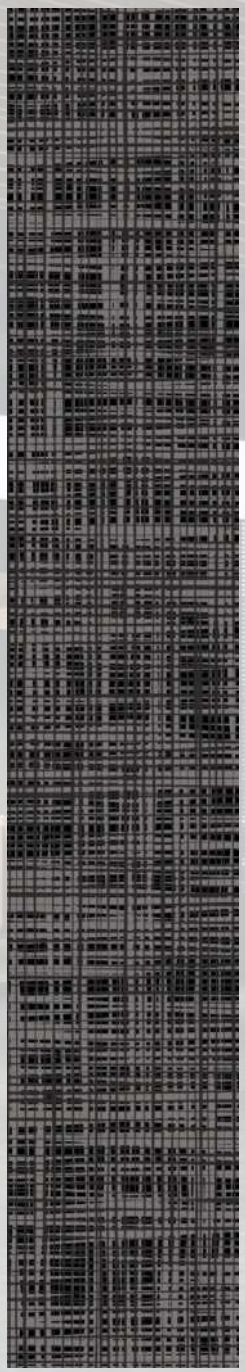

***Color***
*488 IN06 AV07*

***Thickness***
*2.5 mm*

***Installation***
*Random*

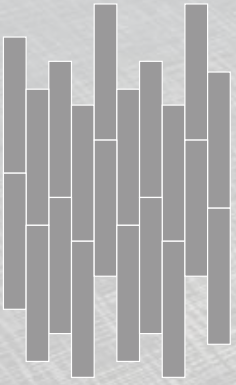

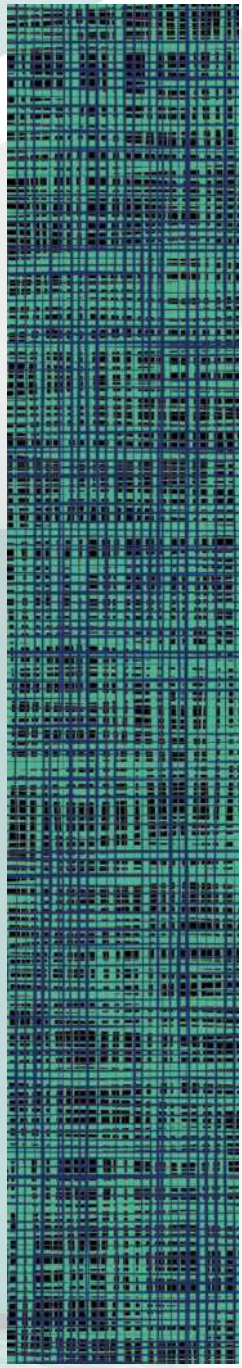

***Color***
*488 IN23 AV20*

***Thickness***
*6 mm*

***Installation***
*Random*

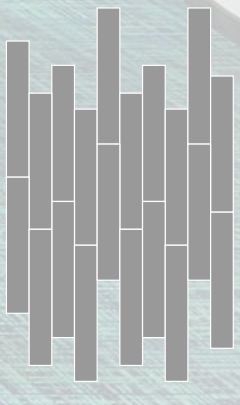

***Color***
*488 IN15 AV05*

***Thickness***
*2.5  mm*

***Installation***
*Random*

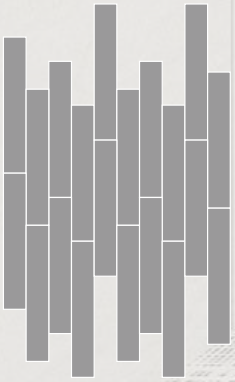

# In A Unique Format.

Neoflex Interweave Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truely sophisticated floor can be created that avoids repetition.

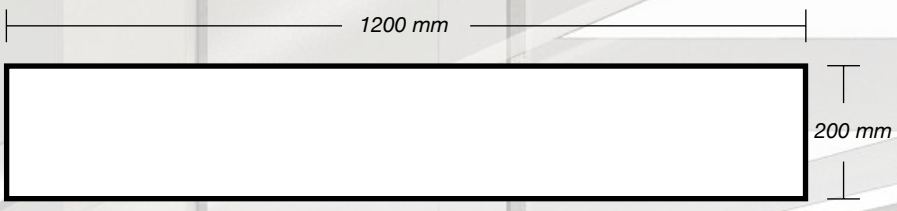

# Fit for Purpose.

Neoflex Interweave Series is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.

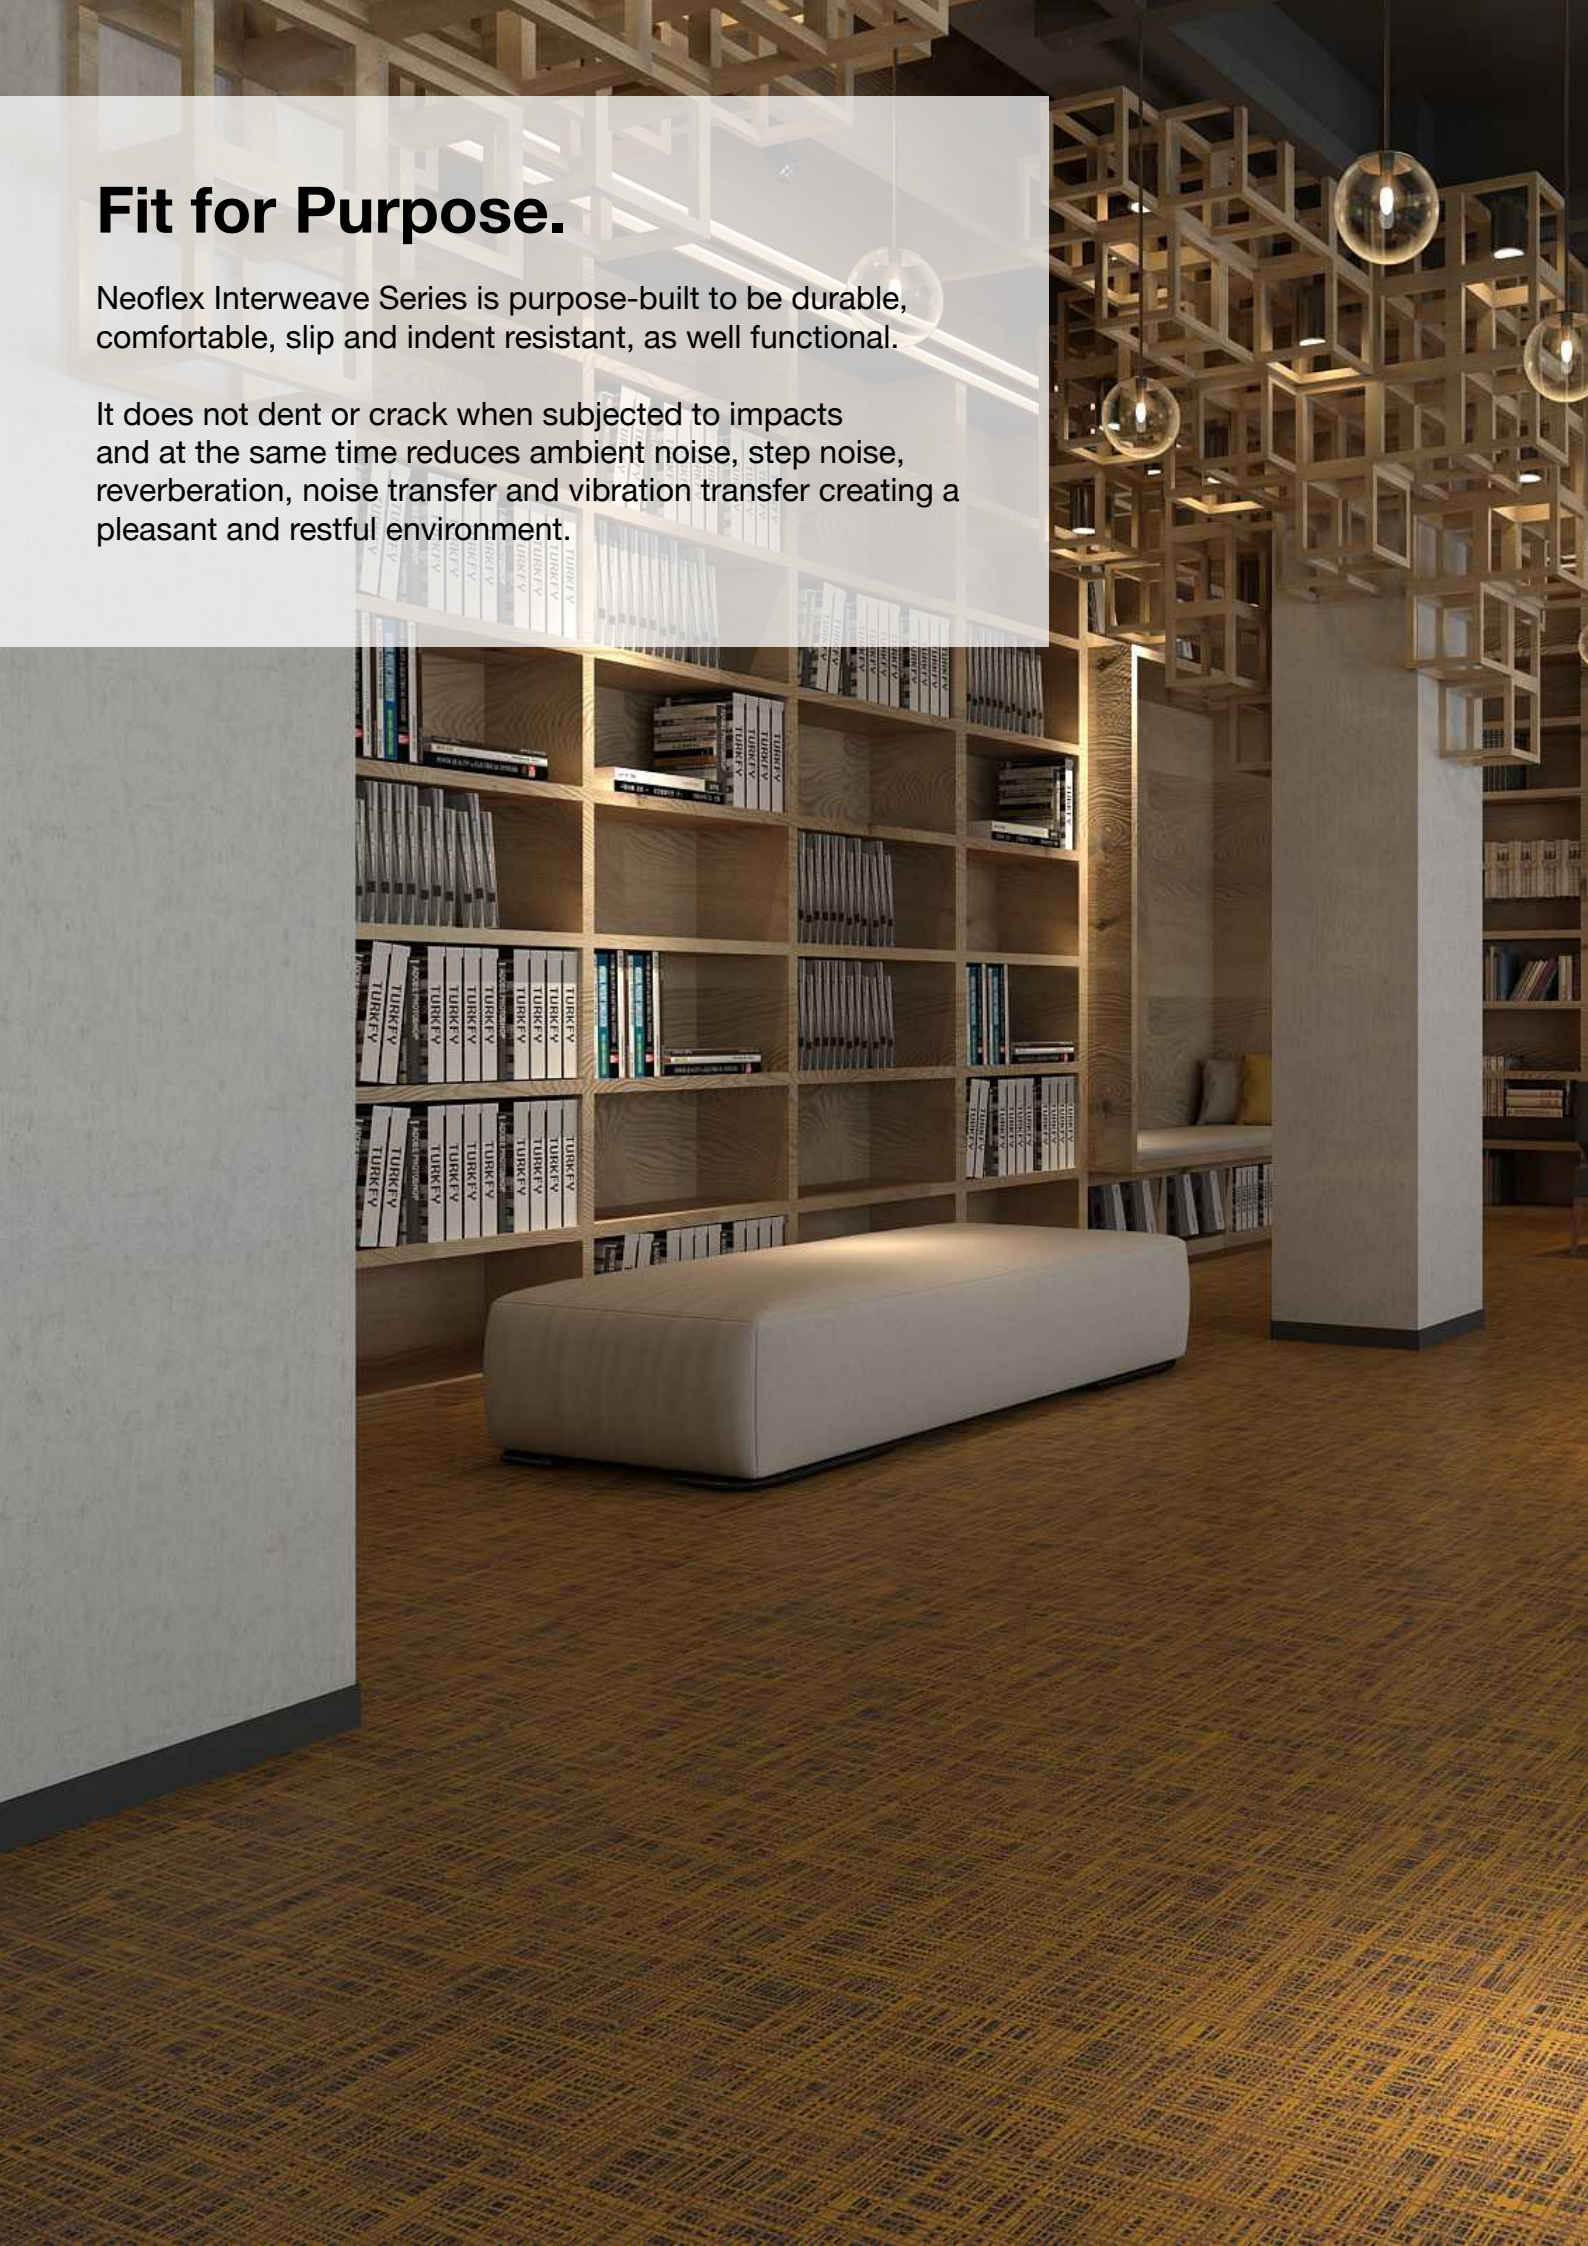

***Color***
*488 IN17 AV18*

***Thickness***
*6 mm*

***Installation***
*Random*

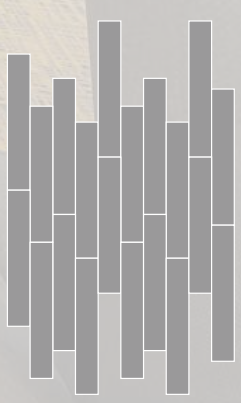

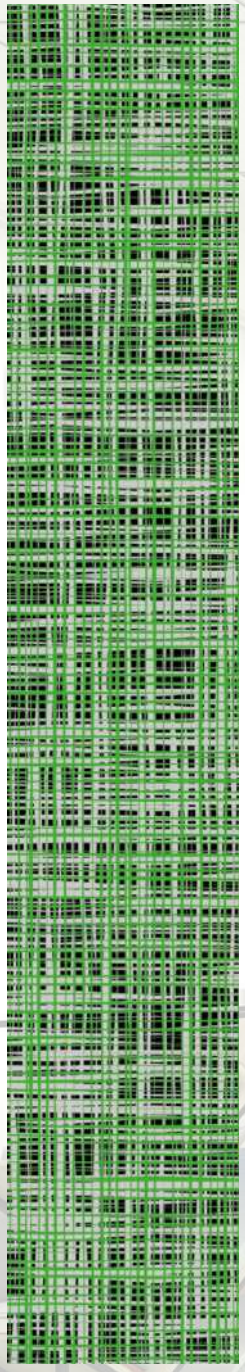

***Colors***
*488 IN05 AV10*

***Thickness***
*6 mm*

***Installation***
*Random*

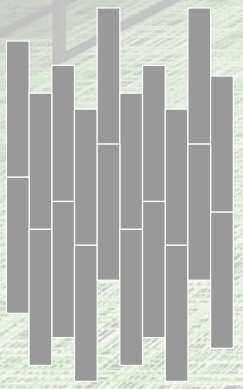

NEW YORK

***Color***
*488 IN16 AV06*

***Thickness***
*2.5 mm*

***Installation***
*Random*

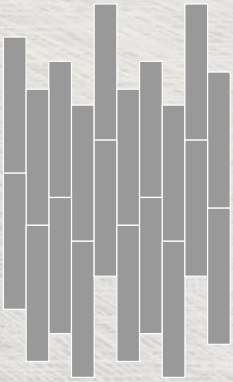

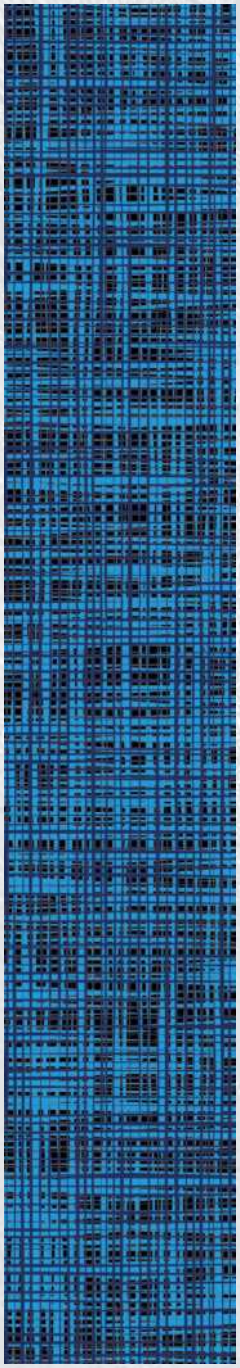

***Colors***
*488 IN09 AV20*

***Thickness***
*6 mm*

***Installation***
*Random*

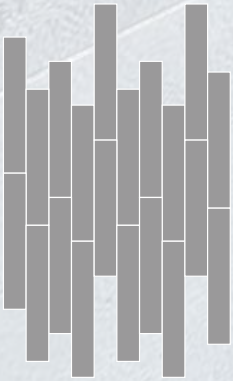

***Color***
*488 IN16 AV17*

***Thickness***
*6 mm*

***Installation***
*Random*

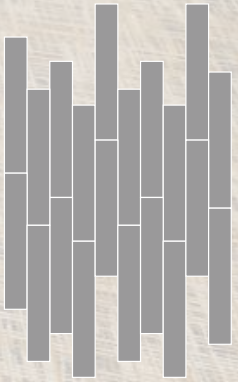

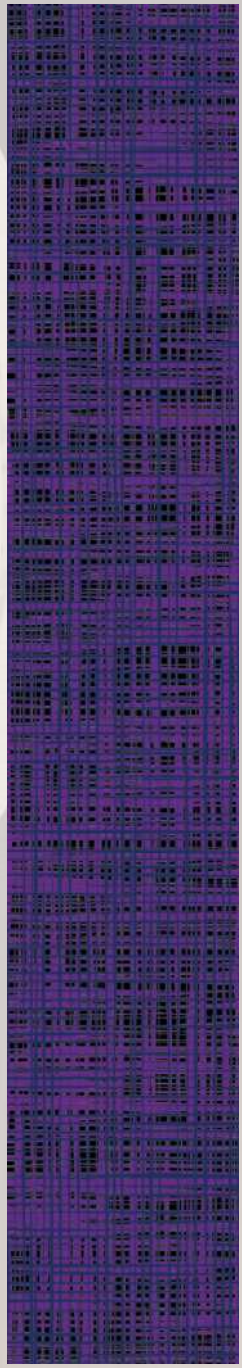

***Colors***
*488 IN19 AV20*

***Thickness***
*6 mm*

***Installation***
*Random*

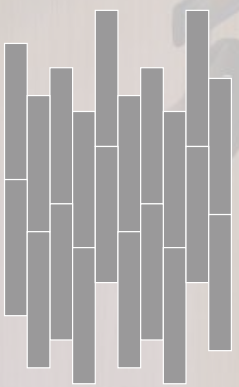

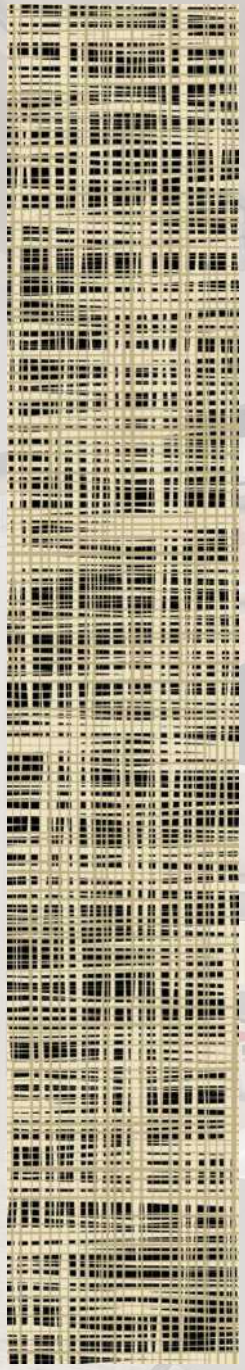

***Color***
*488 IN15 AV16*

***Thickness***
*6 mm*

***Installation***
*Random*

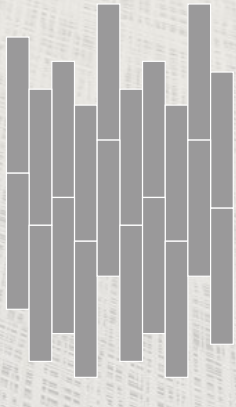

***Colors***
*488 IN18 AV07*

***Thickness***
*2.5 mm*

***Installation***
*Random*

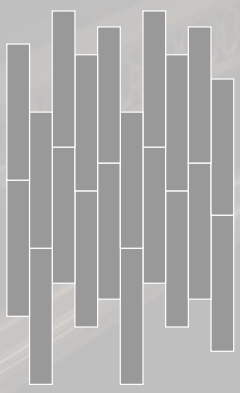

***Color***
*488 IN17 AV07*

***Thickness***
*2.5 mm*

***Installation***
*Random*

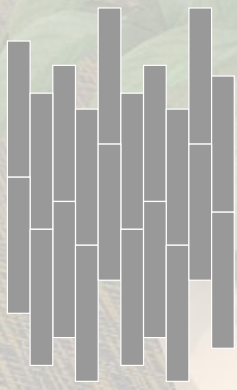

***Color***
*488 IN06 AV18*

***Thickness***
*6 mm*

***Installation***
*Random*

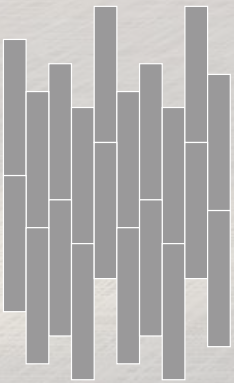

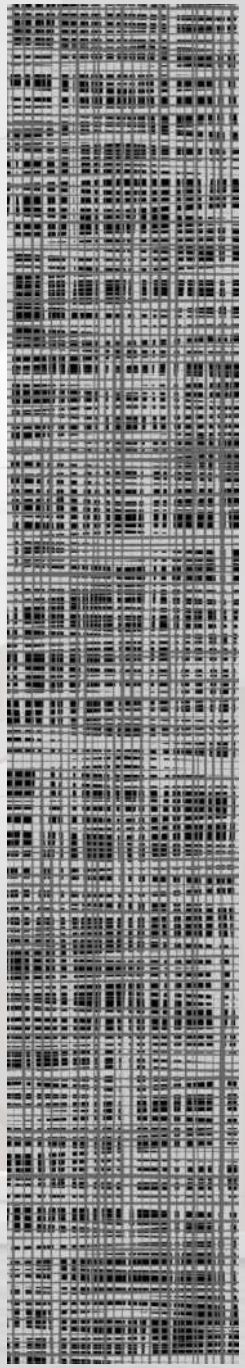

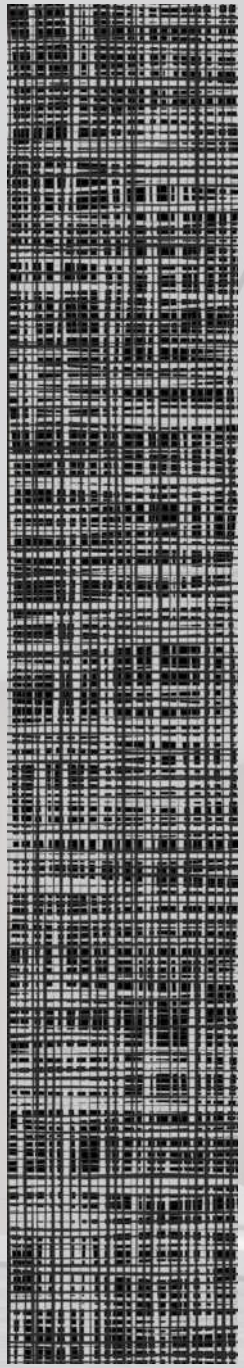

***Colors***
*488 IN05 AV06*

*488 IN05 AV07*

***Thickness***
*6 mm*

***Installation***
*2-Color Herringbone*

***Colors***
*488 IN16 AV20*

***Thickness***
*6 mm*

***Installation***
*Random*

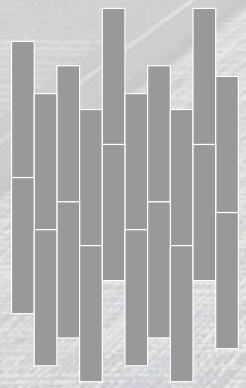

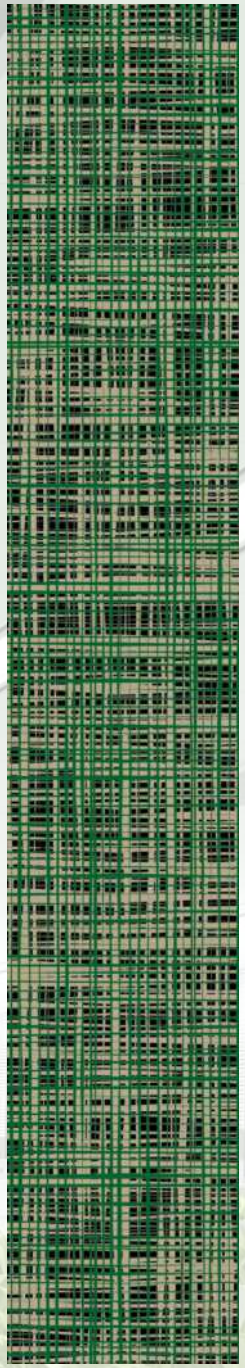

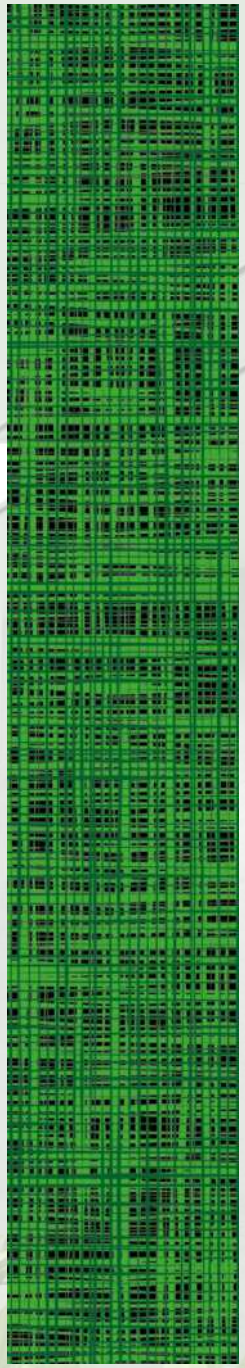

***Colors***
*488 IN16 AV11*

*488 IN10 AV11*

***Thickness***
*6 mm*

***Installation***
*2-Color Random*

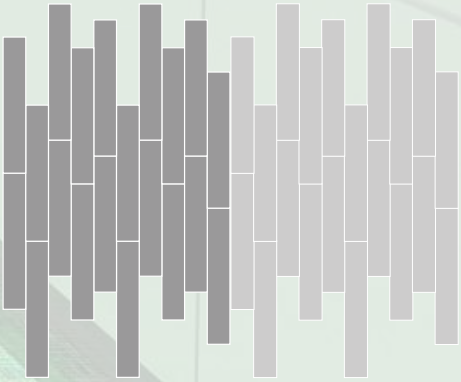

***Colors***
*488 IN05 AV08*

*488 IN08 AV20*

***Thickness***
*6 mm*

***Installation***
*2-Color Random*

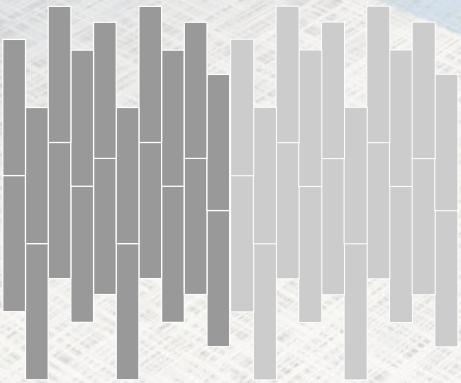

Home

***Colors***
*488 IN08 AV07*

*488 IN06 AV07*

***Thickness***
*6 mm*

***Installation***
*2-Color Herringbone*

# Standard Colors.

Neoflex Interweave Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.

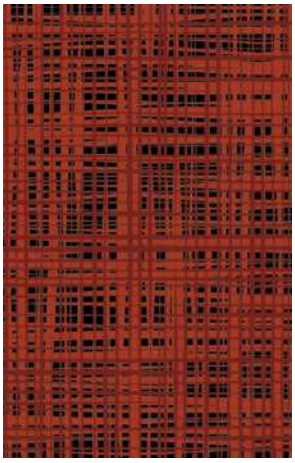

*488 IN01 AV04*

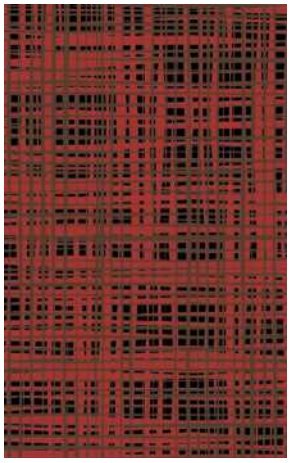

*488 IN01 AV18*

*488 IN04 AV07*

*488 IN05 AV06*

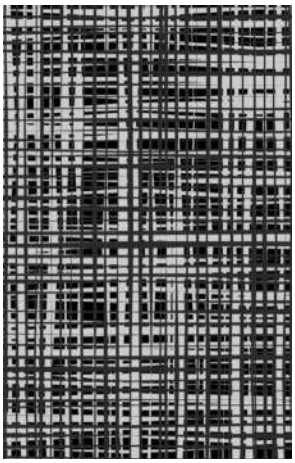

*488 IN05 AV07*

*488 IN05 AV08*

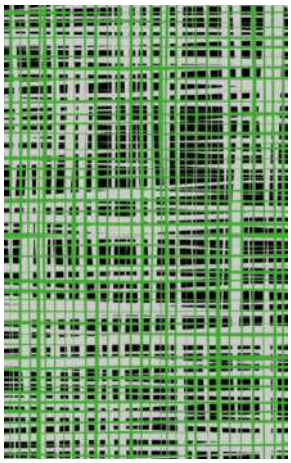

*488 IN05 AV10*

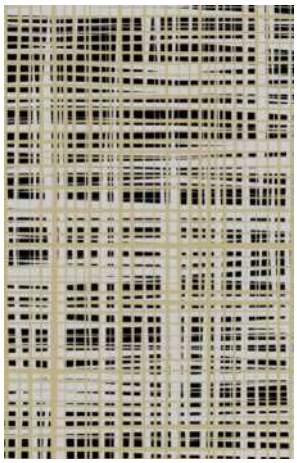

*488 IN05 AV16*

*488 IN05 AV18*

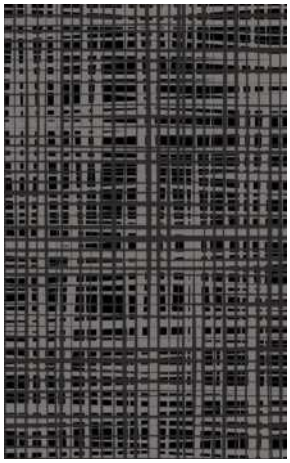

*488 IN06 AV07*

*488 IN06 AV18*

*488 IN08 AV07*

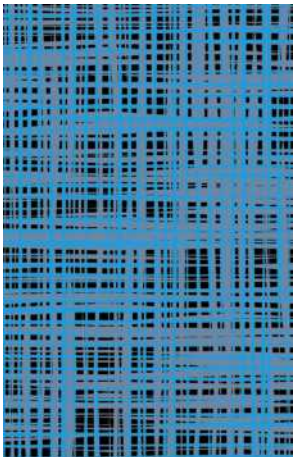
488 IN08 AV09

488 IN08 AV20

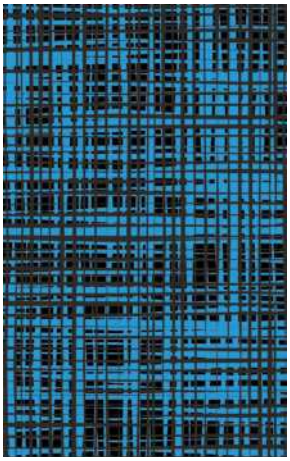
488 IN09 AV07

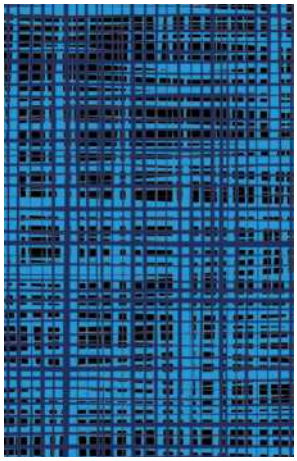
488 IN09 AV20

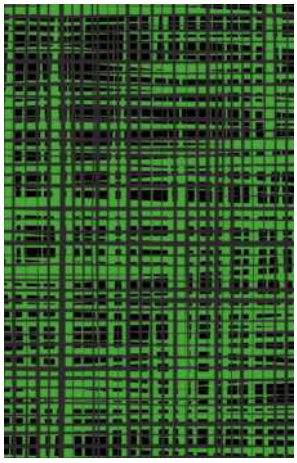
488 IN10 AV07

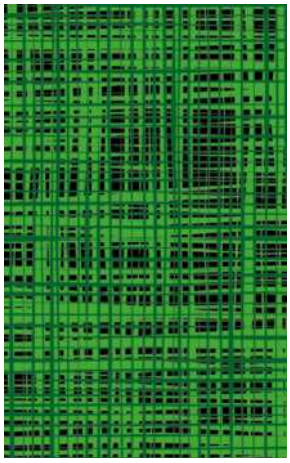
488 IN10 AV11

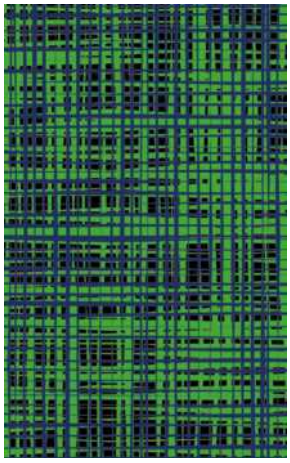
488 IN10 AV20

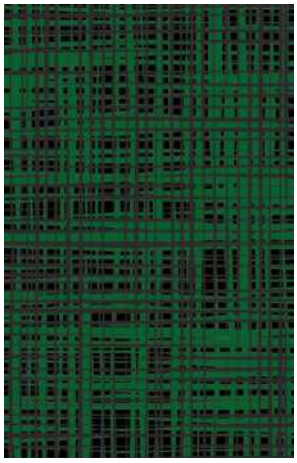
488 IN11 AV07

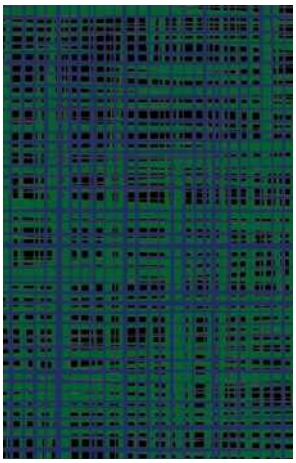
488 IN11 AV20

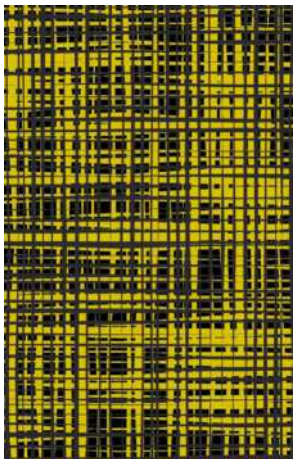
488 IN12 AV07

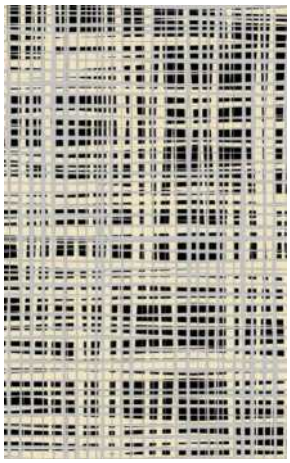
488 IN15 AV05

488 IN15 AV06

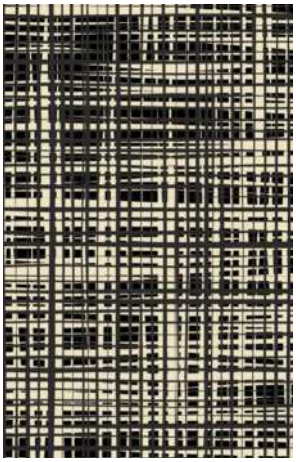
488 IN15 AV07

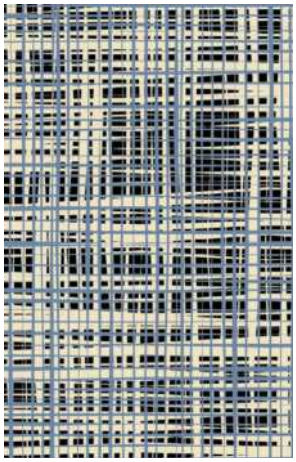
488 IN15 AV08

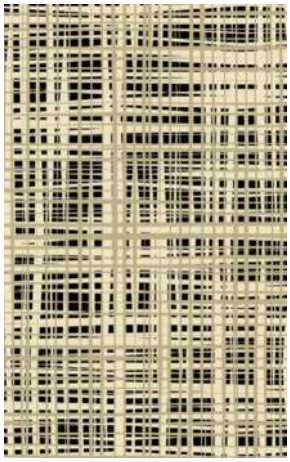
488 IN15 AV16

488 IN15 AV17

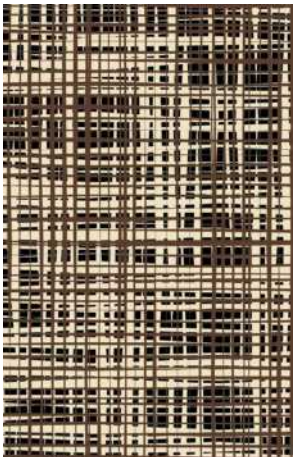
488 IN15 AV18

488 IN15 AV20

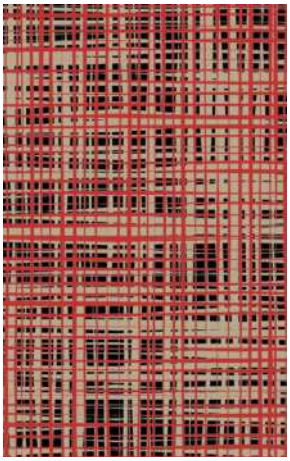
488 IN16 AV01

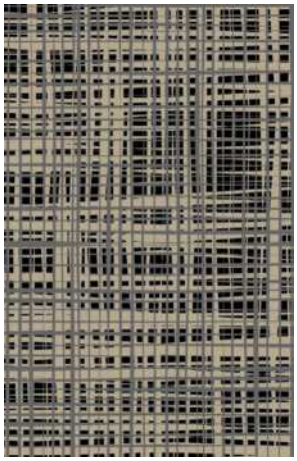
488 IN16 AV06

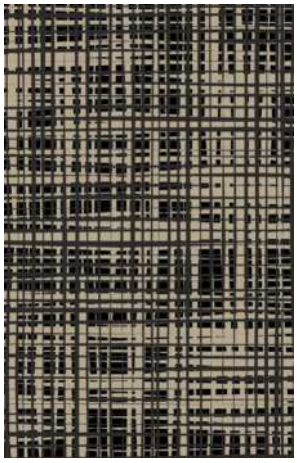
488 IN16 AV07

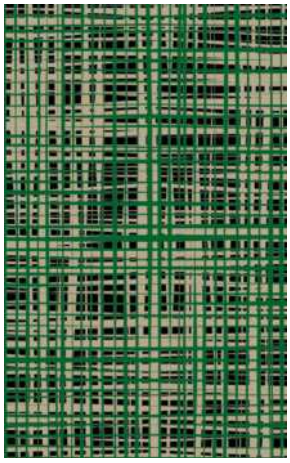
488 IN16 AV11

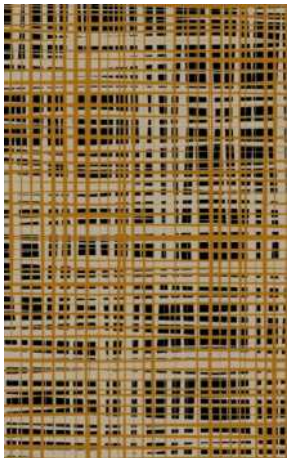
488 IN16 AV17

488 IN16 AV18

488 IN16 AV20

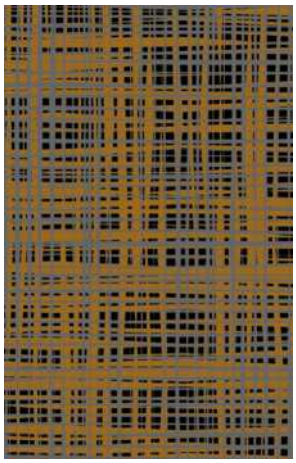
488 IN17 AV06

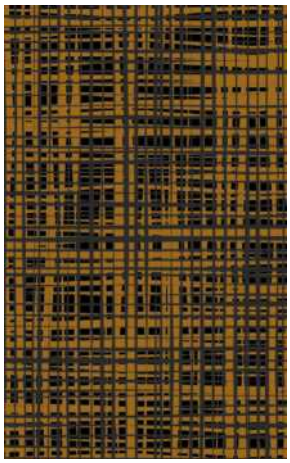
488 IN17 AV07

488 IN17 AV18

488 IN18 AV07

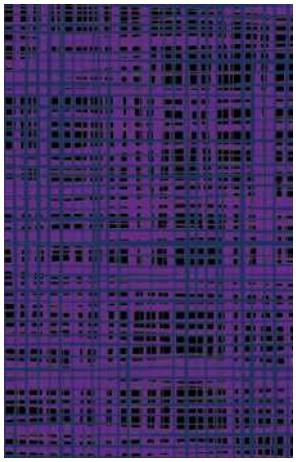
488 IN19 AV20

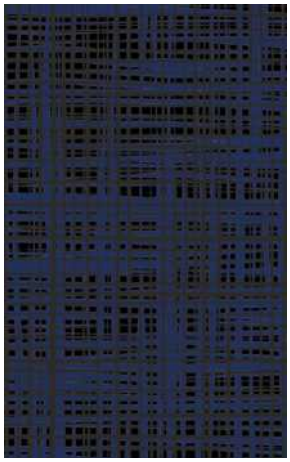
488 IN20 AV07

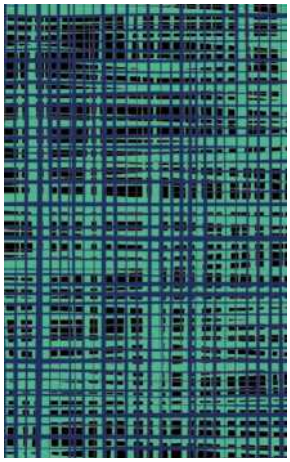
488 IN23 AV20

# Installation Options.

Neoflex Interweave Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.

**Random**



**2-Color Random**

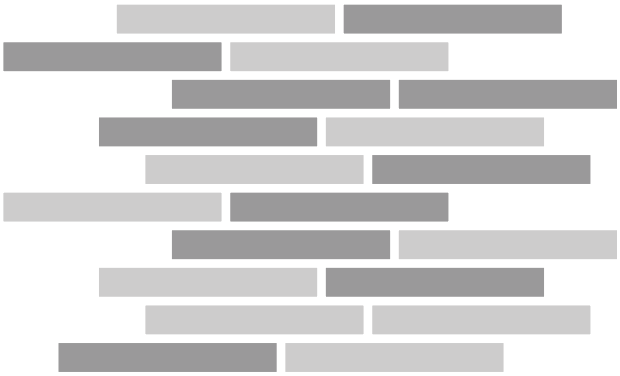

**2-Color Random**

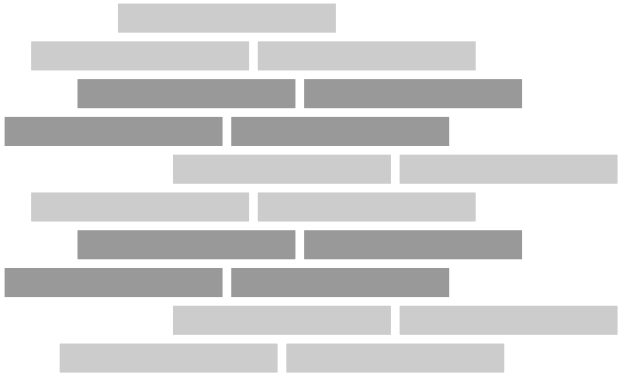

**2-Color Random**

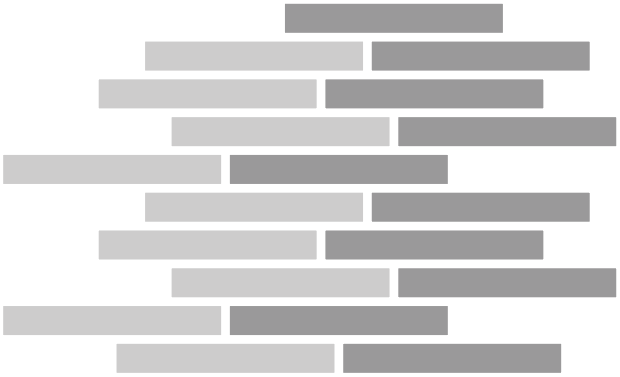

**3-Color Random**

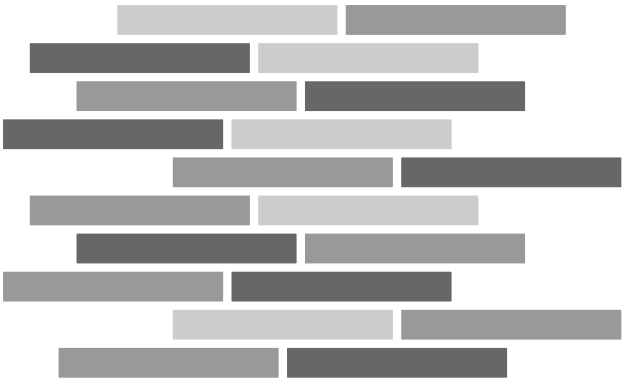

**Herringbone**

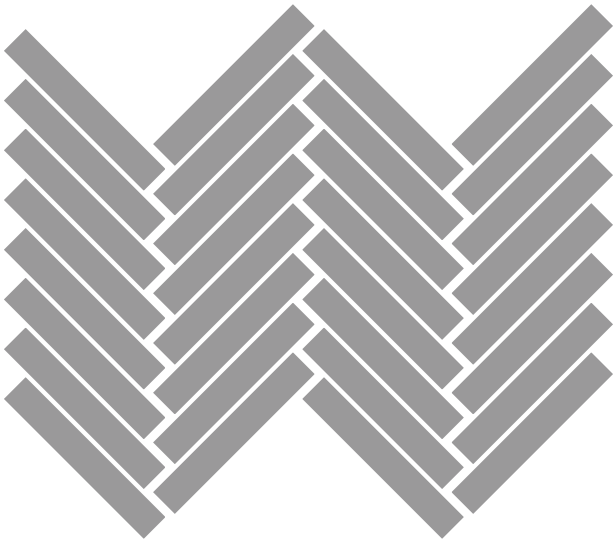

**2-Color Herringbone**

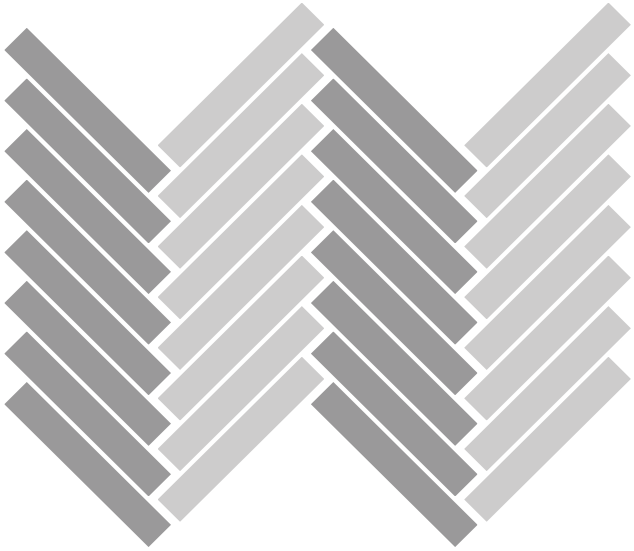

**2-Color Herringbone**

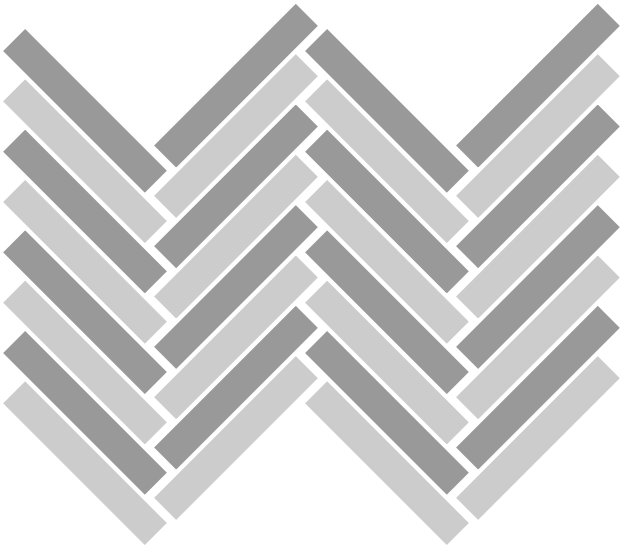

**Checkerboard**

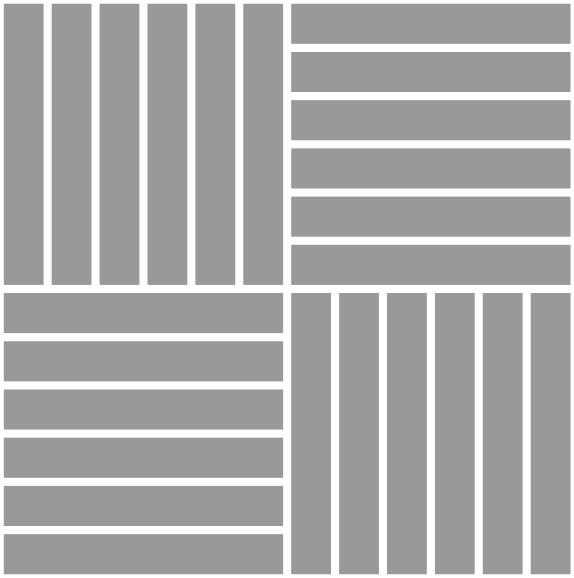

**2-Color Checkerboard**

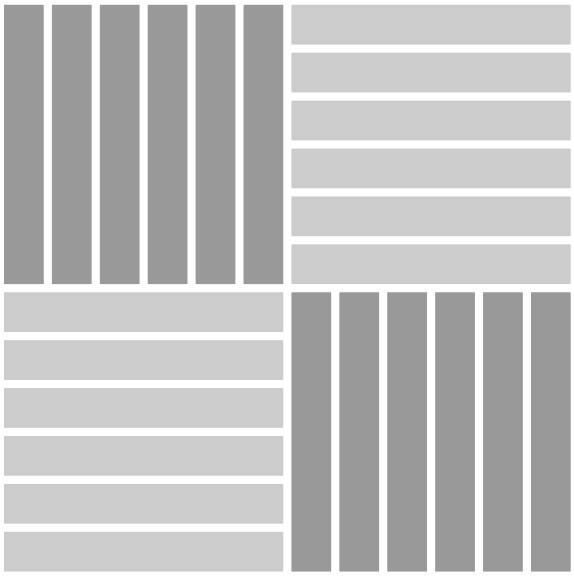

**2-Color Checkerboard**

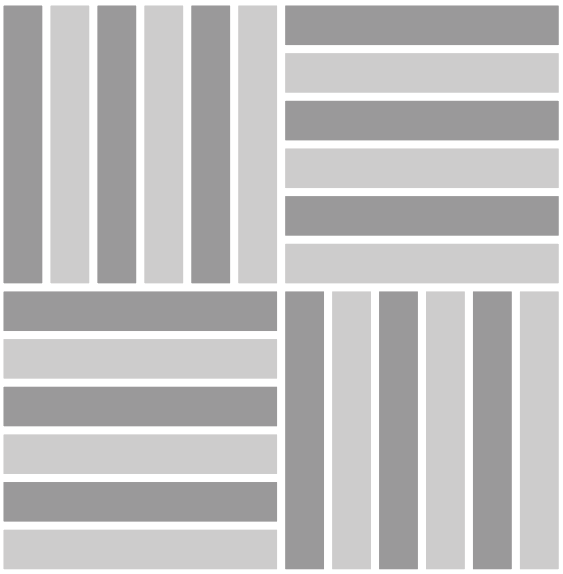

**2-Color Checkerboard**

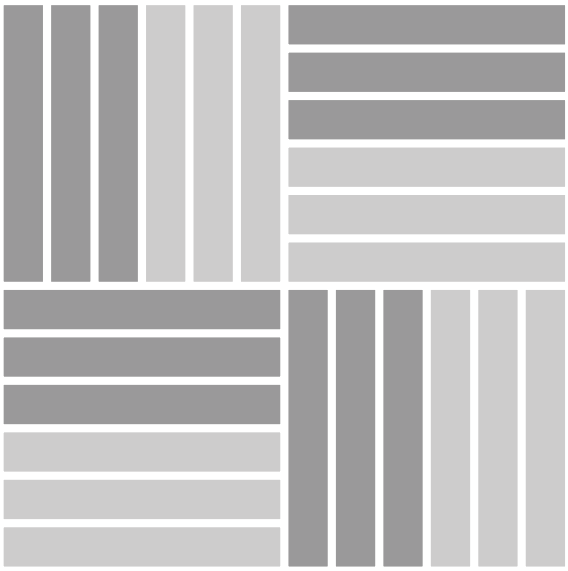

# Technical Specifications.

Neoflex Interweave Series is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited warranty.

| Property | Standard | Result |
|---|---|---|
| Thickness | | 2.5 mm, 6 mm |
| Dimensions | | 1200 mm x 200 mm |
| Weight | | ± 4.65 kg/sqm |
| Hardness | ISO 7619-1:2010 | 62.1° Shore A |
| Determination of Flexibility & Deflection | ISO 24344:2012 | No cracking in either direction |
| Enhanced Slip Resistance | EN 13845:2005 Annex C | Moderate |
| Dynamic Coefficient of Friction | EN 13893:2012 | 0.7 |
| Light Fastness | ISO 105-B02:2013 | 7-8 Grade |
| Residual Indentation | ISO 24343-1:2002 | 0.18 mm |
| Dimensional Stability | ISO 23999:2012 | 0.5% |
| Flammability | EN 13501-1 | Efl (Optional Cfl-s1) |
| Installation | | Stikibak™ or Full-Bond |

# Standard Thicknesses.

Neoflex Interweave Series is manufactured in 2 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EDPM top layer. 6mm thickness consists of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Interweave Series can be adhered on top.

YOU CAN
BRING
OUR
VALUES
MAKE EVERY
MOMENT SPECIAL
WORK
TOGETHER

# Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Interweave Series.

Rephouse manufacturers a complete range of commercial rubber flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.

***www.rephouse.com***

***@rephouse***

***info@rephouse.com***

***@rephouse***

REPHOUSE