

RUBBER FLOORING
IN PLANKS

NEOFLEX
INTERWEAVE
SERIES

Neoflex Interweave Series.

Neoflex™ Interweave Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor fitness and leisure settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Fitness Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.







Color
488 IN15 AV05

Thickness
8 mm

Installation
Random

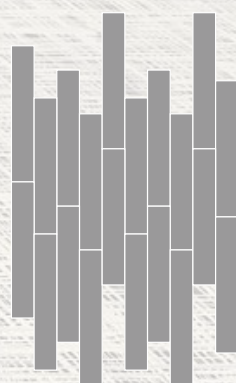




Color
488 IN23 AV20

Thickness
8 mm

Installation
Random

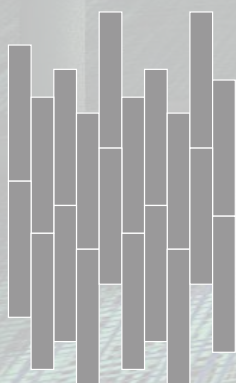


Inspired by Tradition.

Inspired by the traditions of woven craftsmen, Neoflex Interweave Series is designed to add depth and texture to a floor, creating a memorable aesthetic.

Neoflex Interweave Series showcases outstanding color combinations across its 44 colorways, giving the floor a strong presence that is rich, and profound.






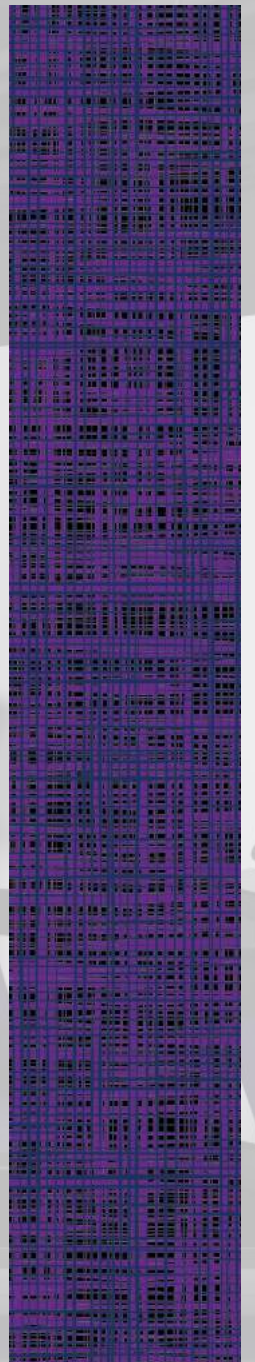


Color
488 IN19 AV20

Thickness
6 mm

Installation
Random

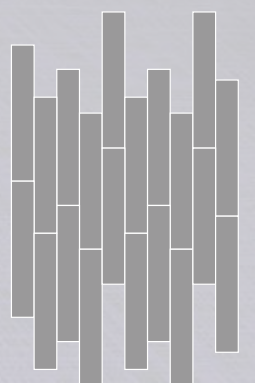




Color
488 IN06 AV07

Thickness
8 mm


Installation
Random

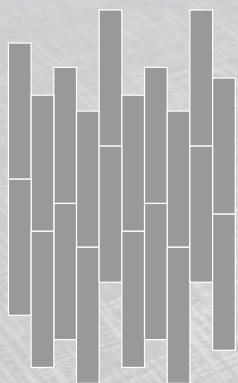



 SPORTS



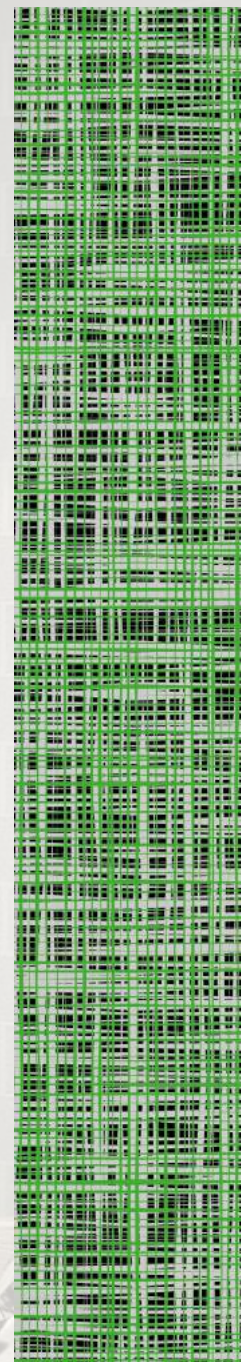


Color
488 IN05 AV10

Thickness
2.5 mm

Installation
Random




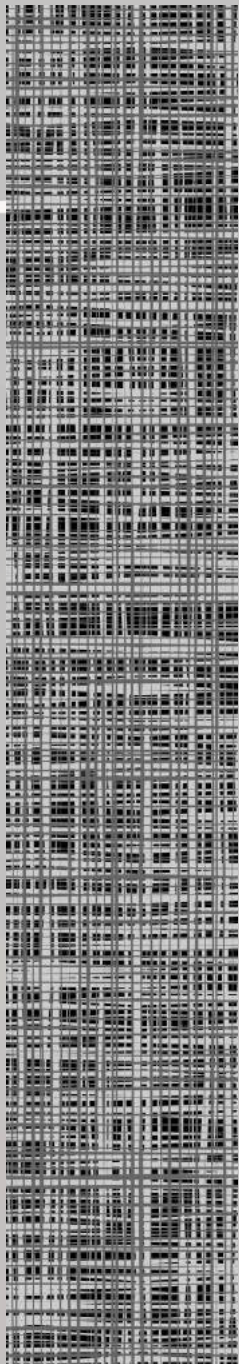

Color
488 IN05 AV06

Thickness
2.5 mm



Installation
Random

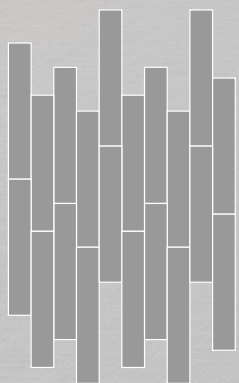

In A Unique Format.

Neoflex Interweave Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truly sophisticated floor can be created that avoids repetition.

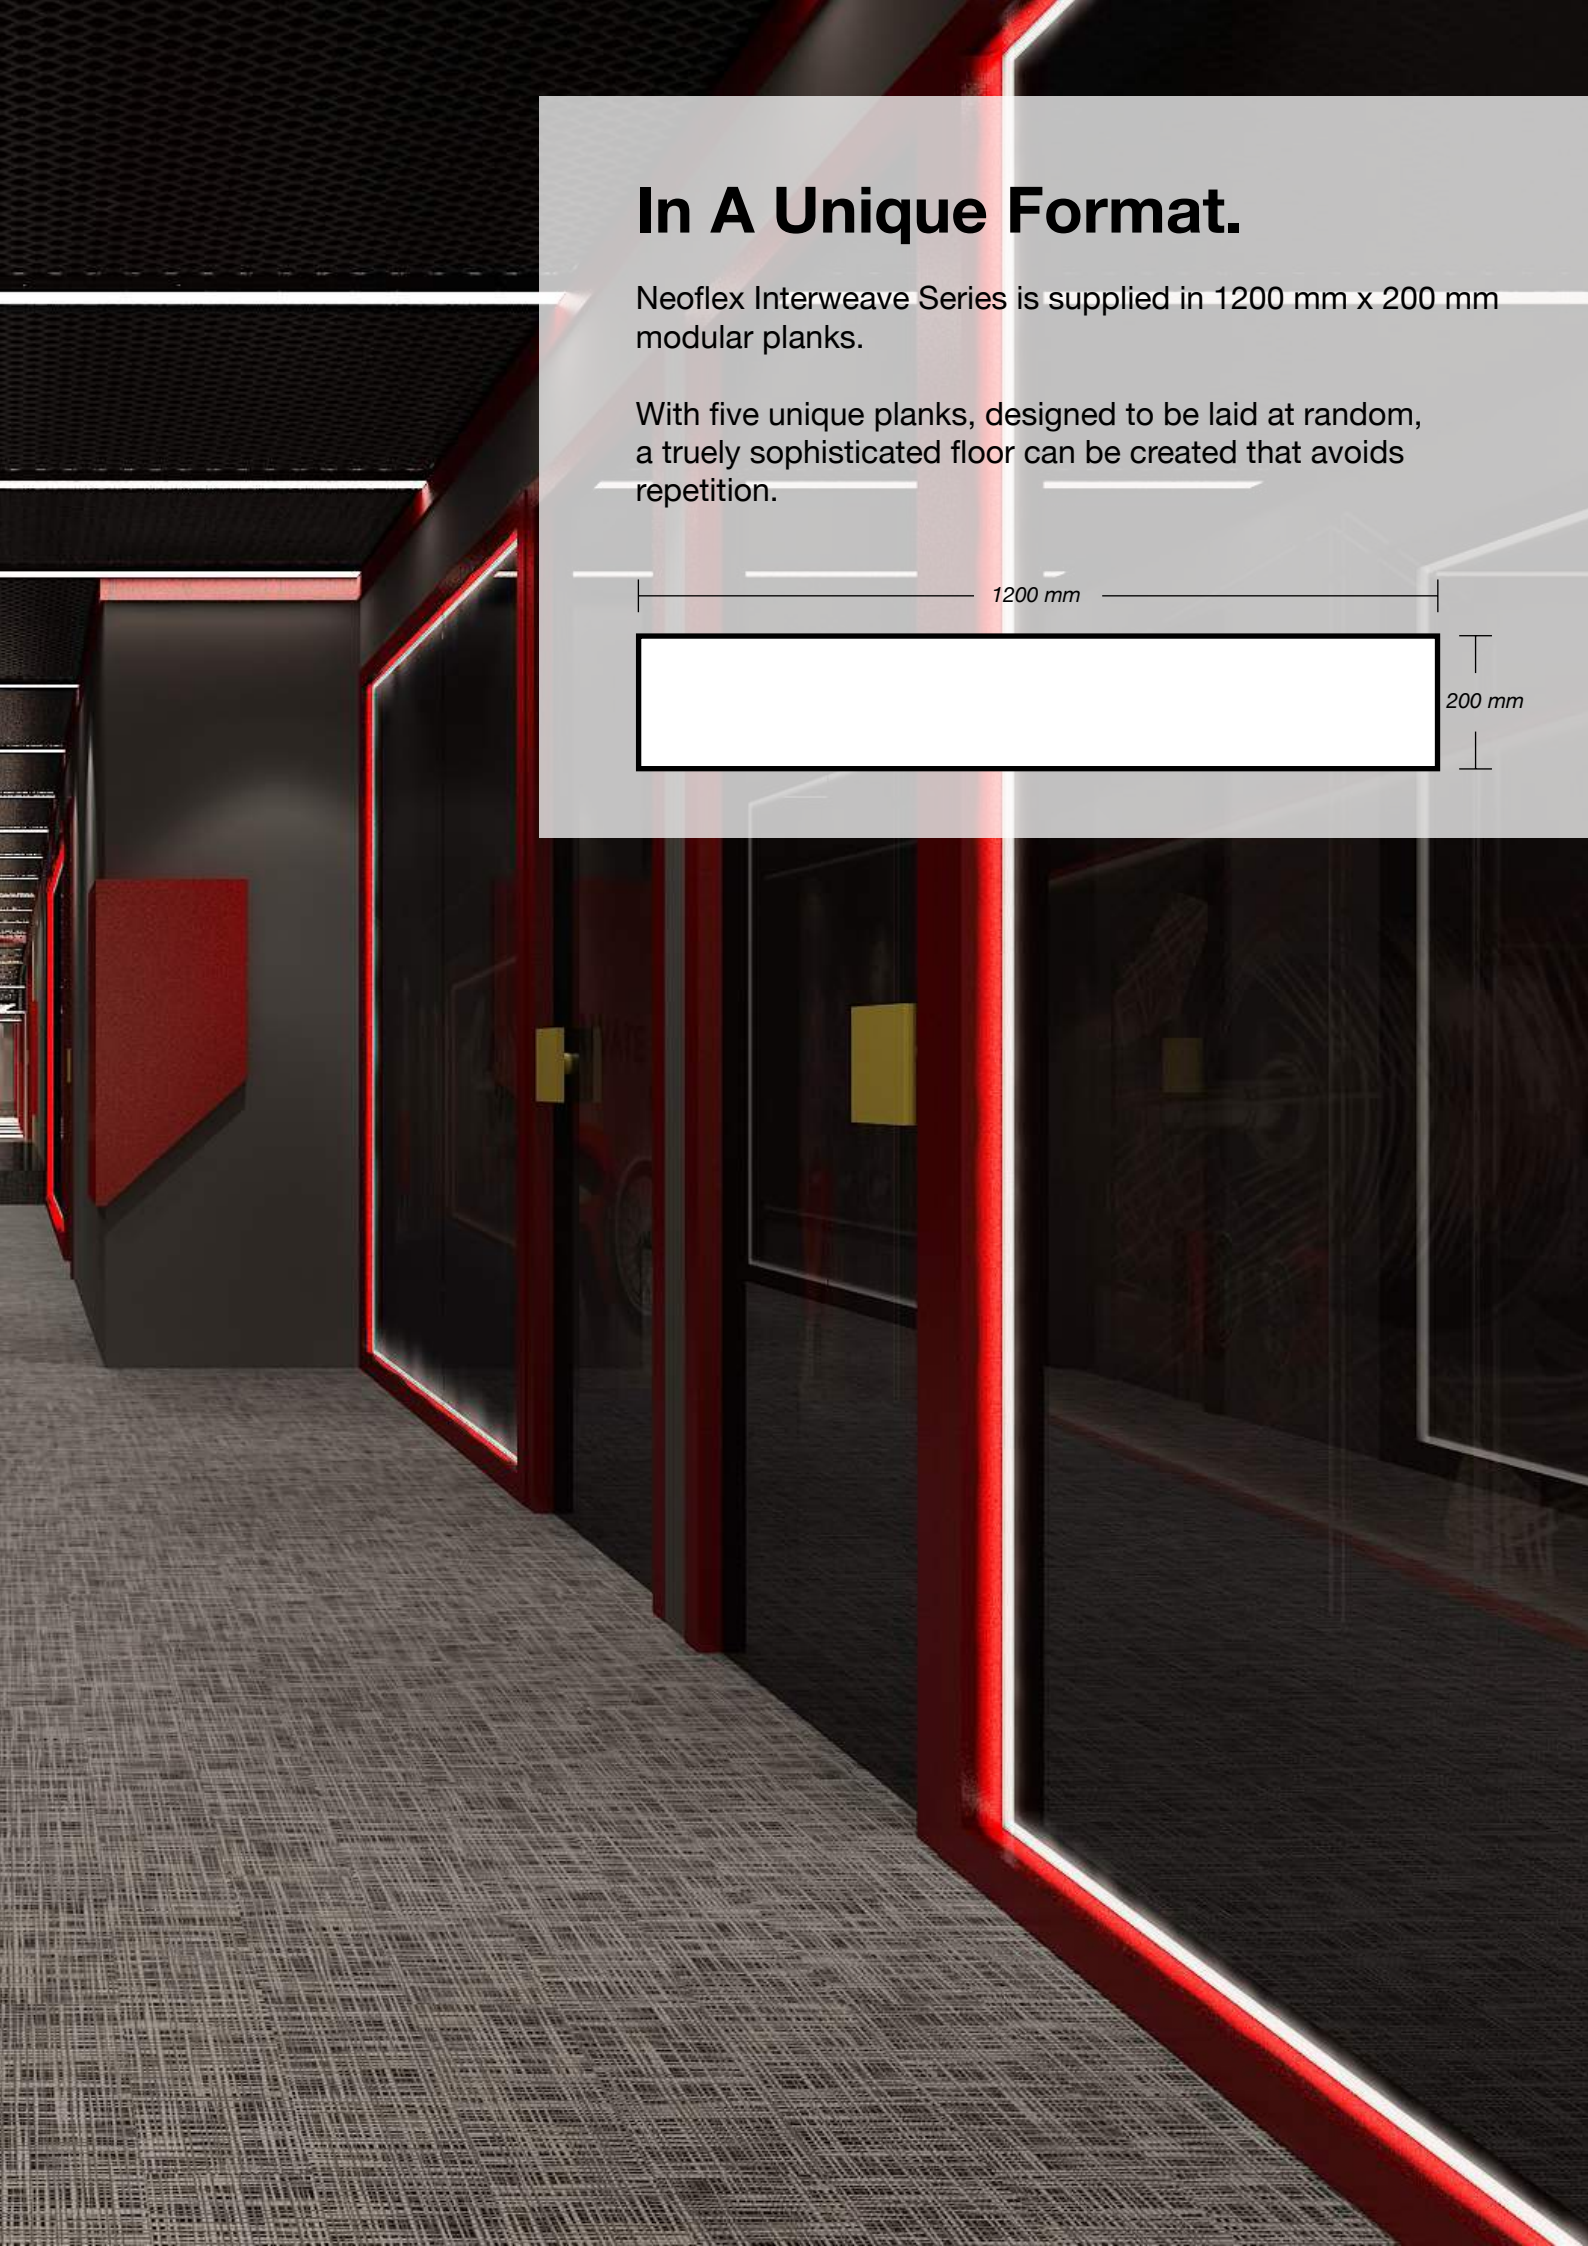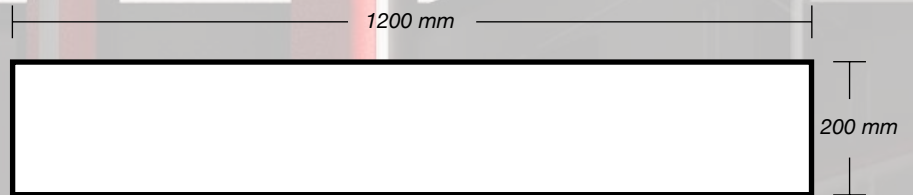


Fit for Purpose.

Neoflex Interweave Series Fitness Flooring is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts by free-weights or kettle-bells and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.




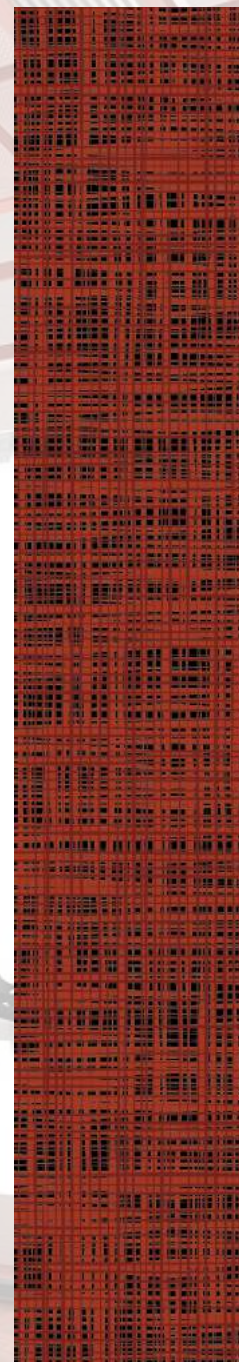


Color
488 IN01 AV04

Thickness
10 mm

Installation
Random

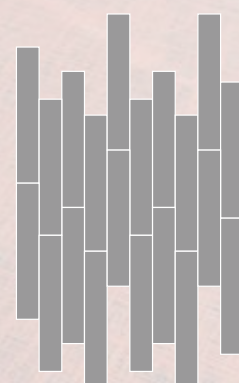

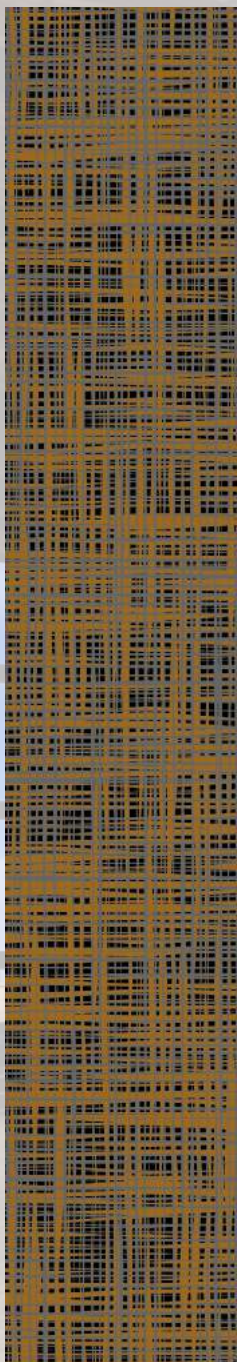

Colors


488 IN17 AV06

Thickness

10 mm


Installation

Random

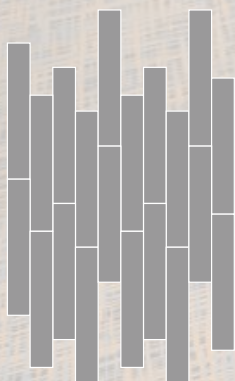





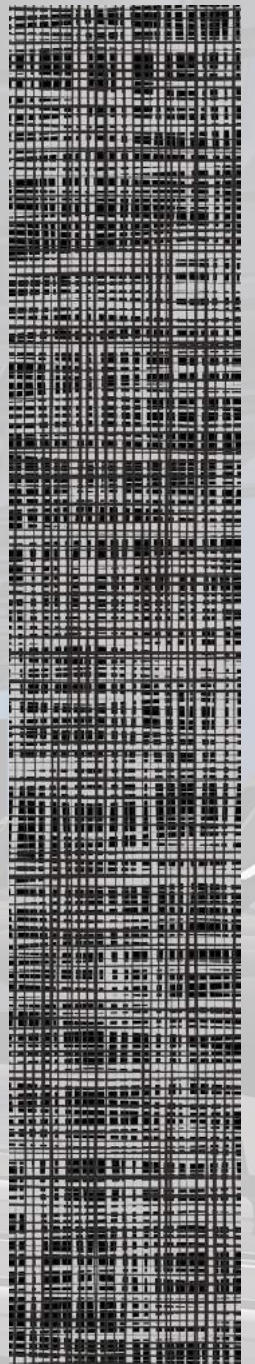


Color
488 IN05 AV07

Thickness
6 mm

Installation
Random




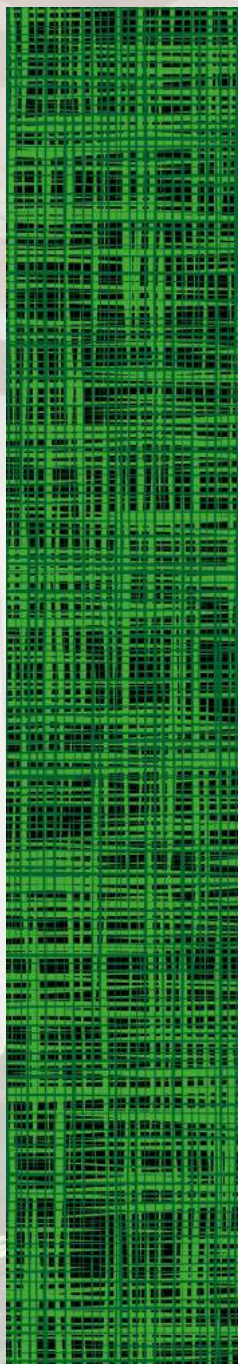

Colors
488 IN10 AV11

Thickness
10 mm

Installation
Random

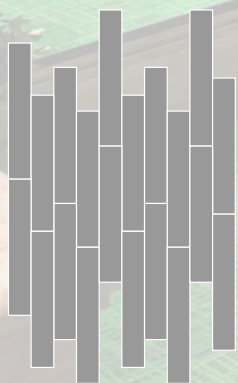









Color
488 IN16 AV06

Thickness
8 mm

Installation
Random

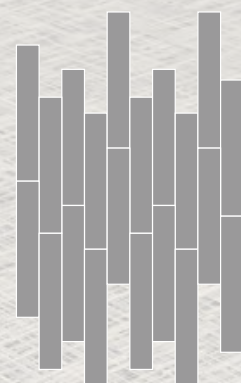


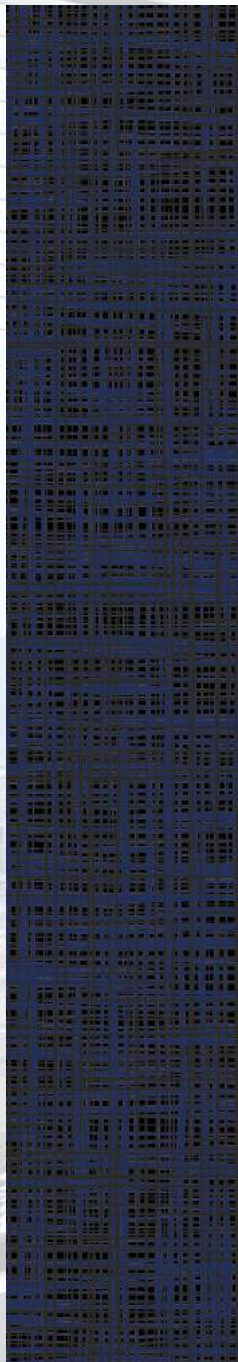

Colors
488 IN20 AV07

Thickness
6 mm

Installation
Random

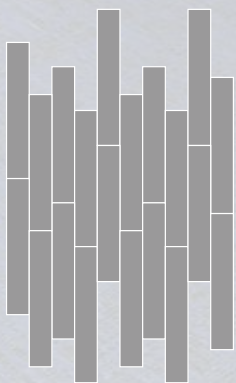








Color
488 IN17 AV18

Thickness
6 mm

Installation
Random

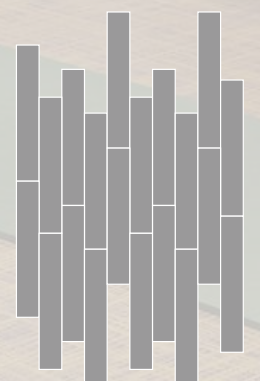




Colors
488 IN16 AV07

488 IN18 AV07


Thickness
6 mm

Installation
Random & Cut to Contour

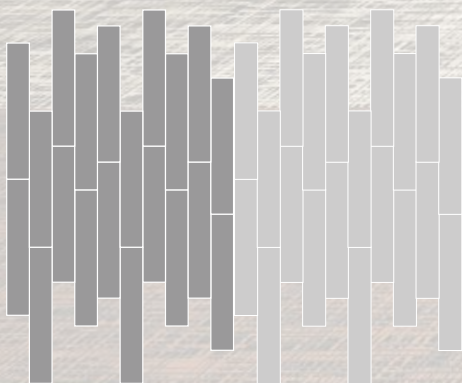






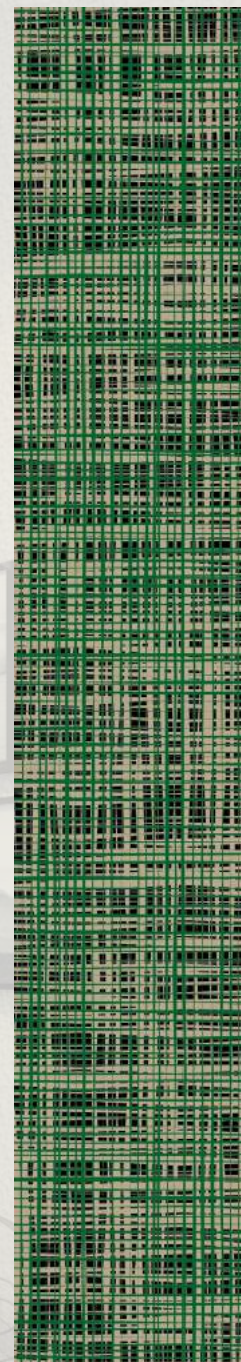


Color
488 IN16 AV10

Thickness
2.5 mm

Installation
Random

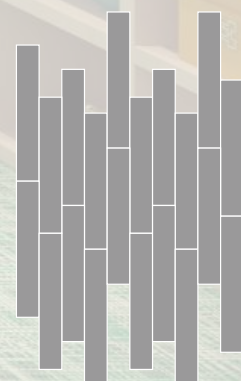

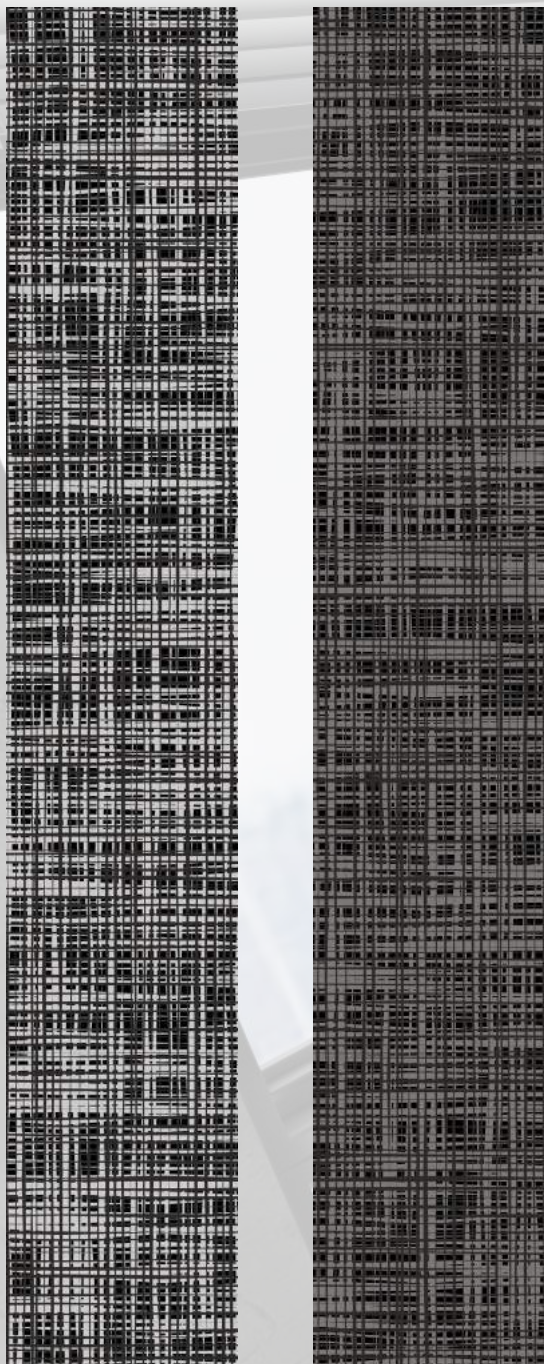

Colors

488 IN05 AV07

488 IN06 AV07


Thickness

6 mm

Installation

2-Color Herringbone



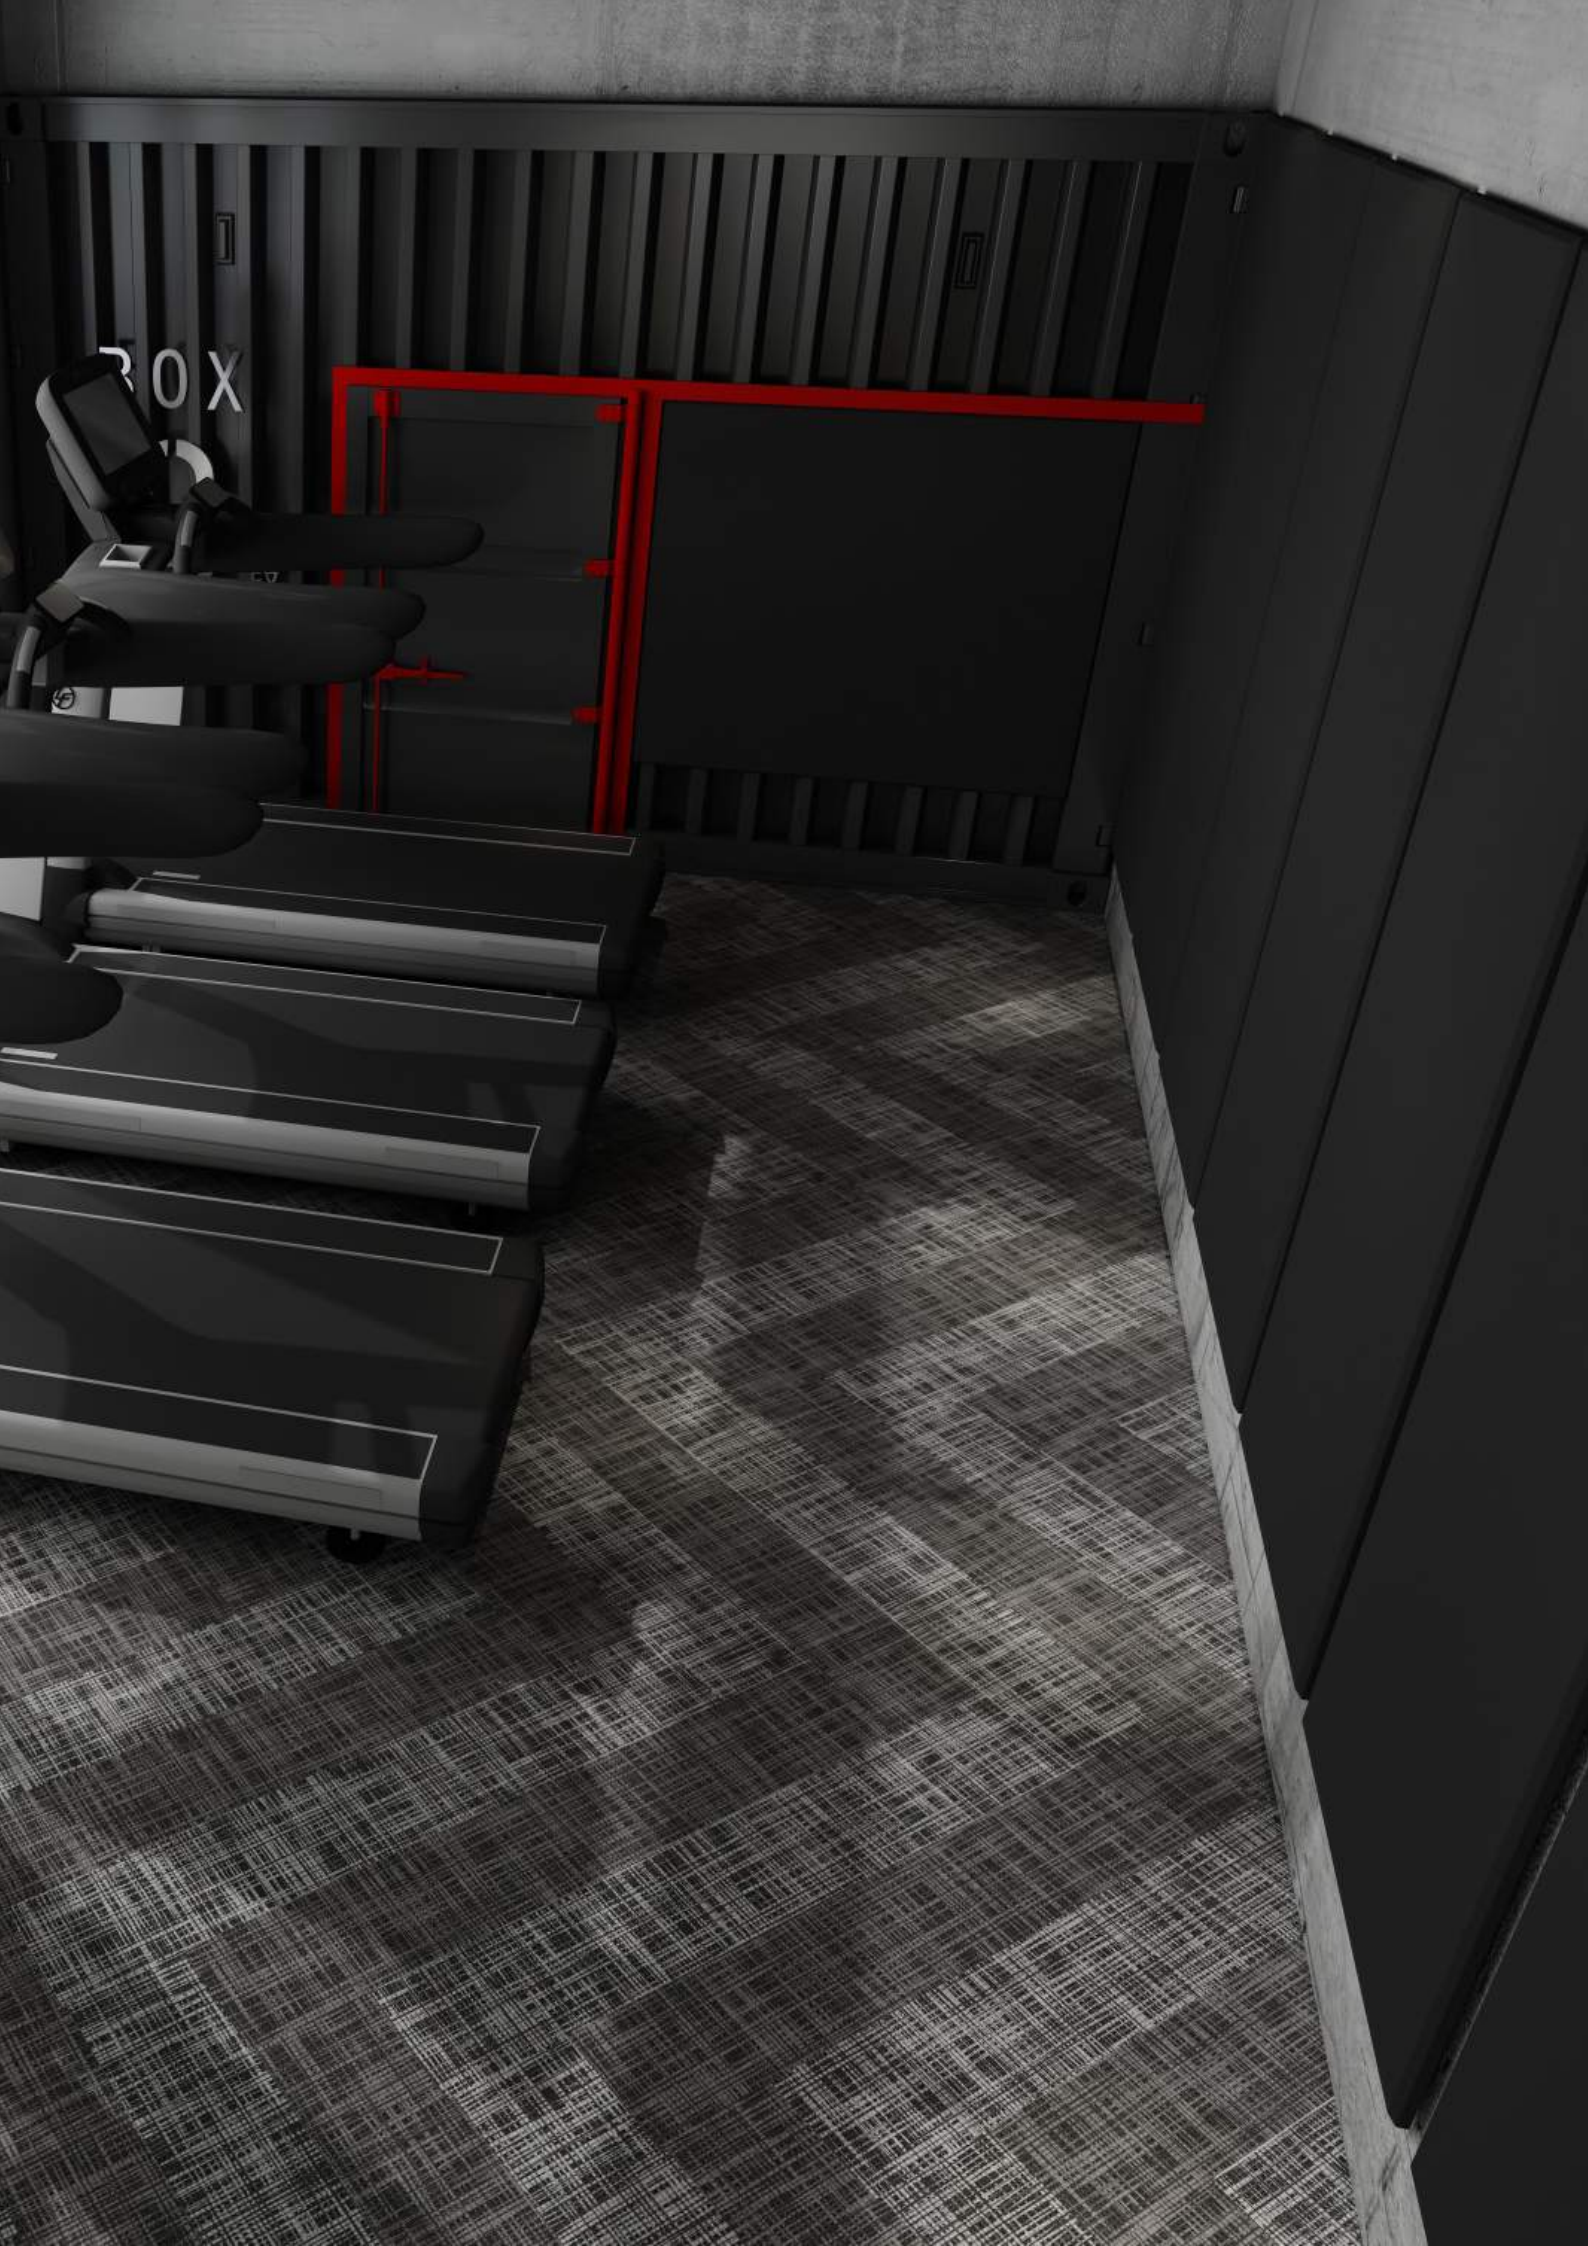







Color
488 IN08 AV20

Thickness
10 mm

Installation
Random

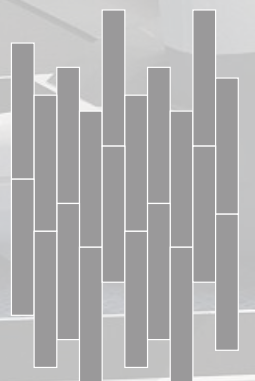

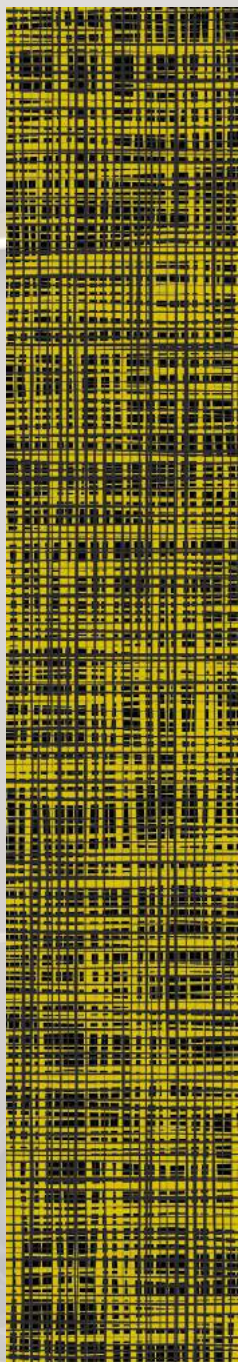

Colors
488 IN12 AV07

Thickness
10 mm

Installation
Random









Colors

488 IN18 AV07


488 IN05 AV18

Thickness

8 mm

Installation


2-Color Random

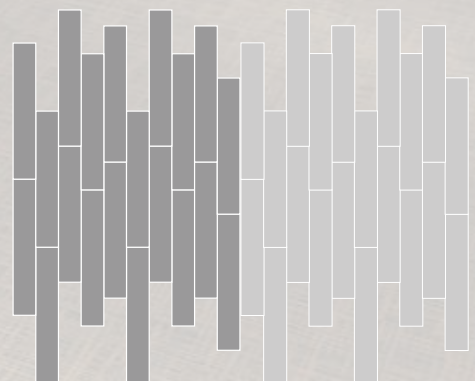


Standard Colors.

Neoflex Interweave Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.

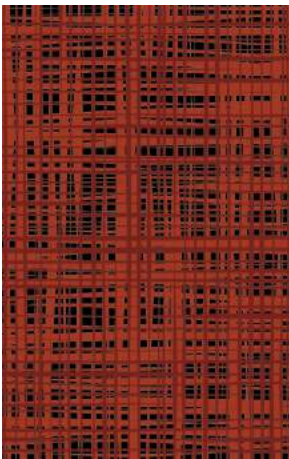


488 IN01 AV04

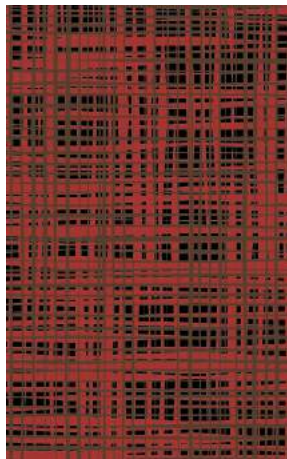


488 IN01 AV18



488 IN04 AV07

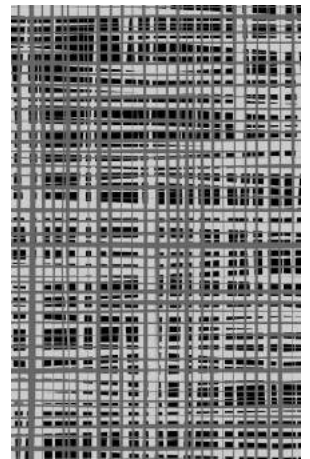


488 IN05 AV06

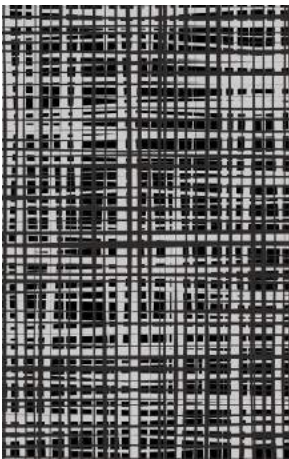


488 IN05 AV07



488 IN05 AV08

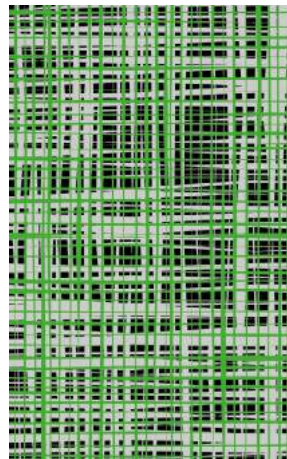


488 IN05 AV10

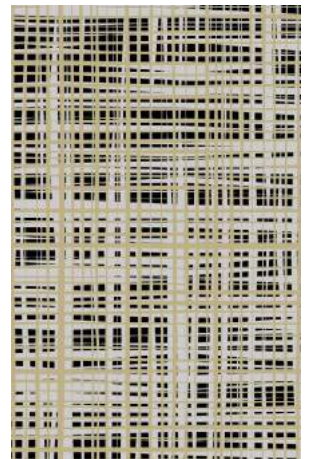

488 IN05 AV16




488 IN05 AV18

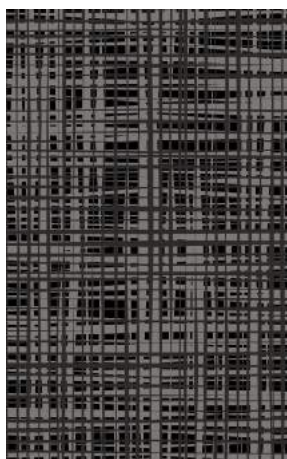


488 IN06 AV07



488 IN06 AV18

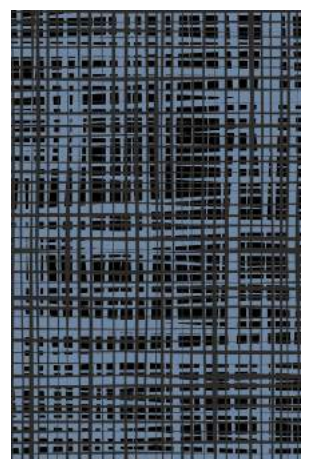


488 IN08 AV07

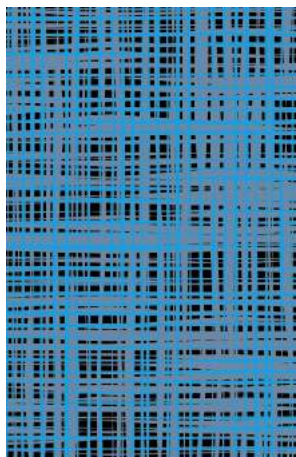


488 IN08 AV09




488 IN08 AV20

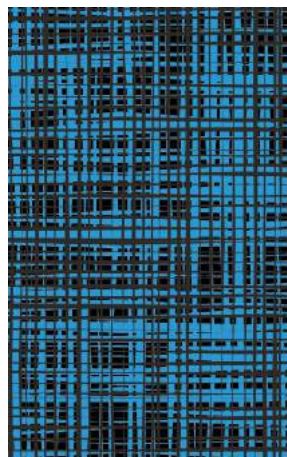


488 IN09 AV07

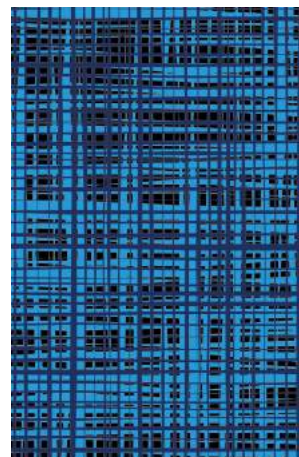


488 IN09 AV20

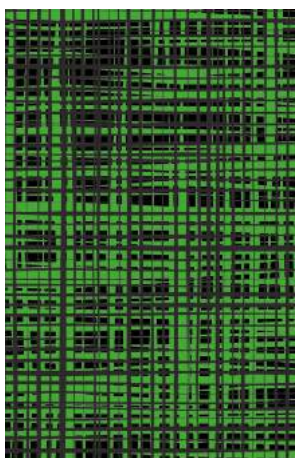


488 IN10 AV07

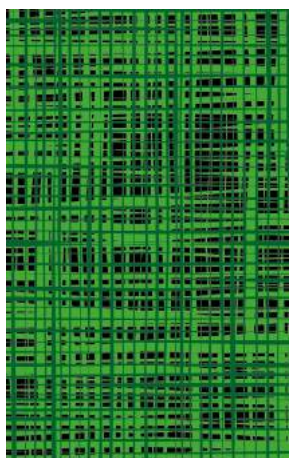


488 IN10 AV11

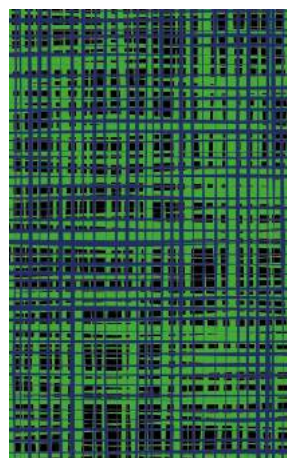


488 IN10 AV20

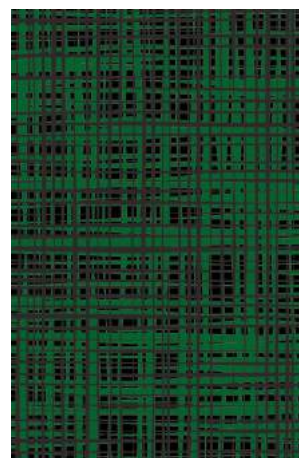


488 IN11 AV07

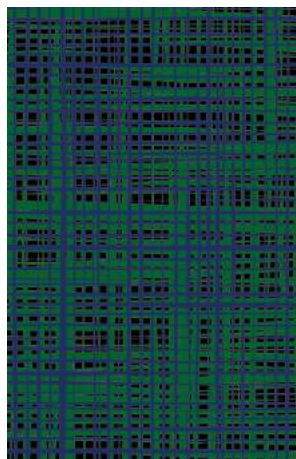

488 IN11 AV20

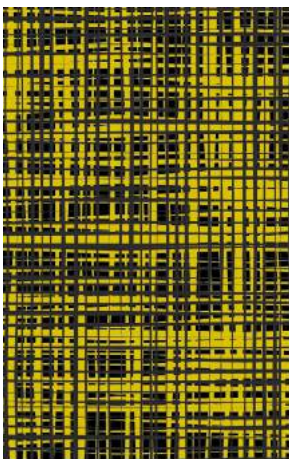


488 IN12 AV07

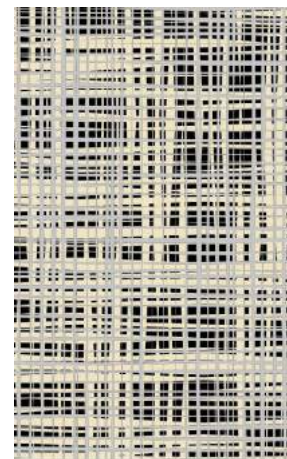


488 IN15 AV05




488 IN15 AV06

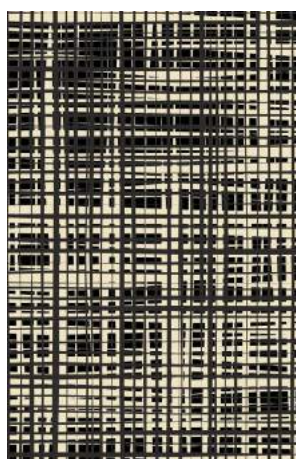

488 IN15 AV07

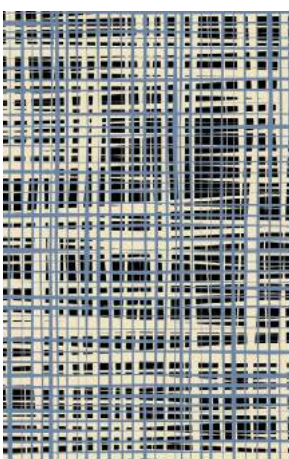

488 IN15 AV08

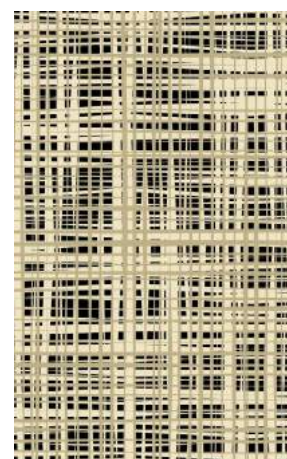


488 IN15 AV16



488 IN15 AV17



488 IN15 AV18

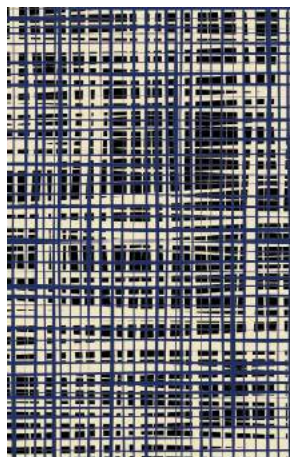


488 IN15 AV20




488 IN16 AV01



488 IN16 AV06

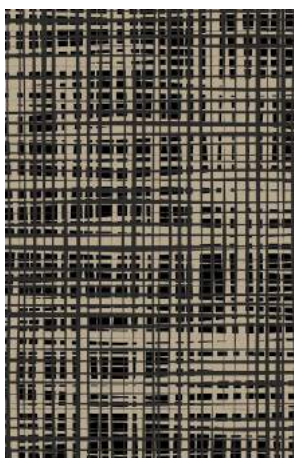

488 IN16 AV07

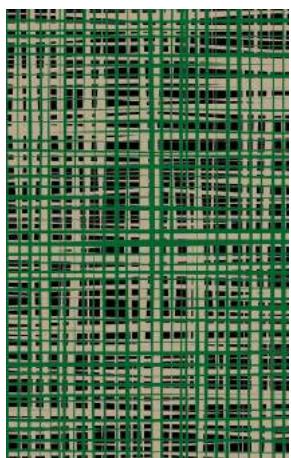


488 IN16 AV11




488 IN16 AV17




488 IN16 AV18

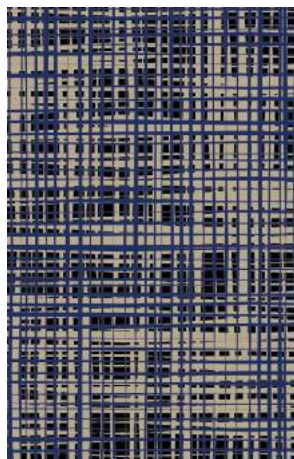

488 IN16 AV20

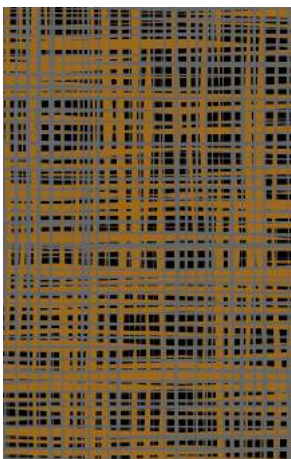

488 IN17 AV06

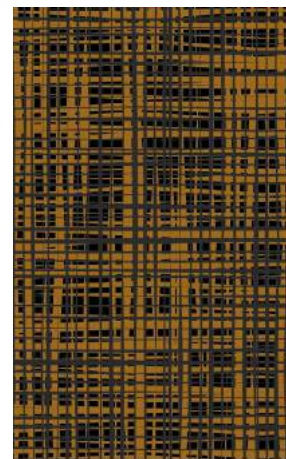


488 IN17 AV07




488 IN17 AV18




488 IN18 AV07

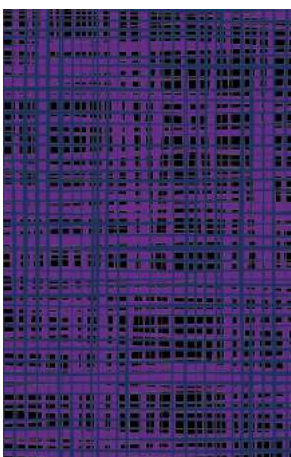

488 IN19 AV20

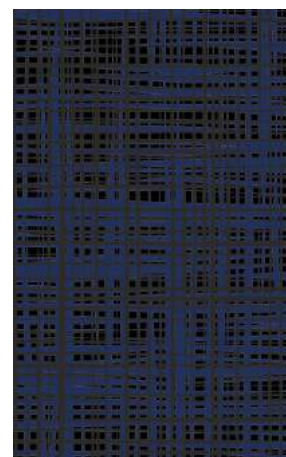

488 IN20 AV07

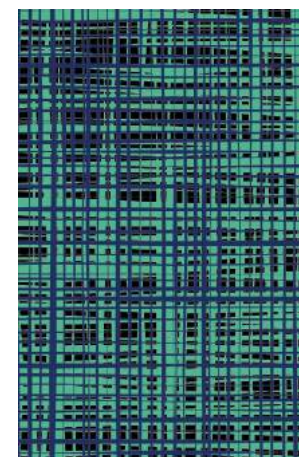


488 IN23 AV20


Installation Options.

Neoflex Interweave Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


Random

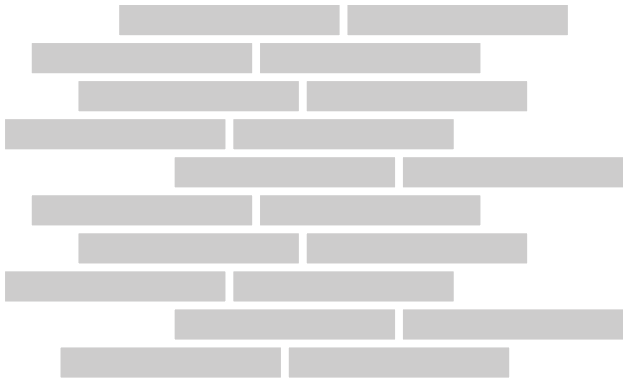


2-Color Random

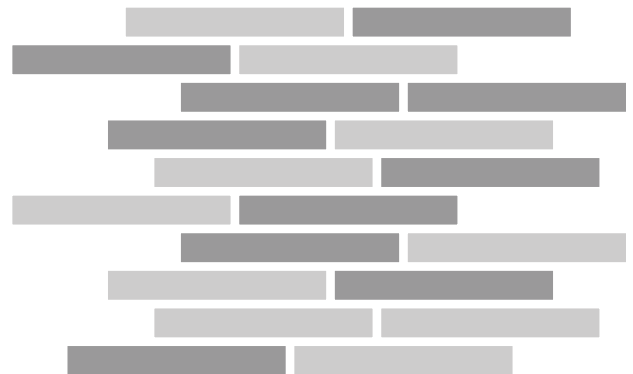


2-Color Random

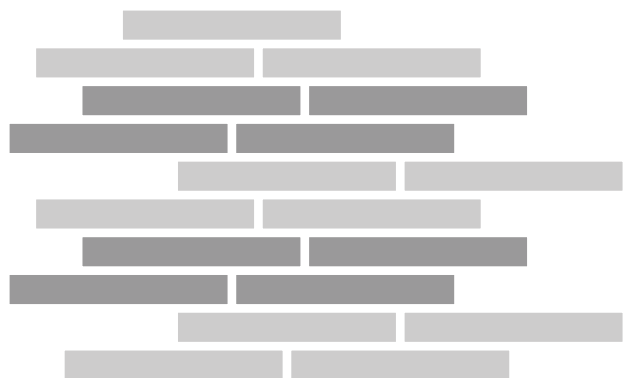


2-Color Random

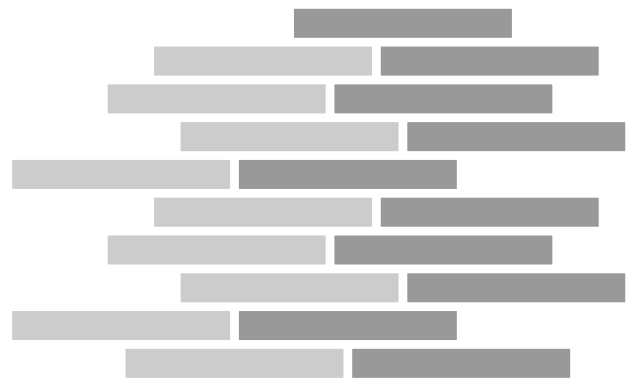


3-Color Random

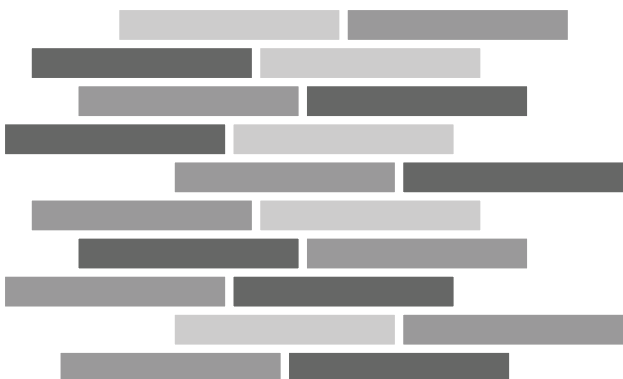

Herringbone

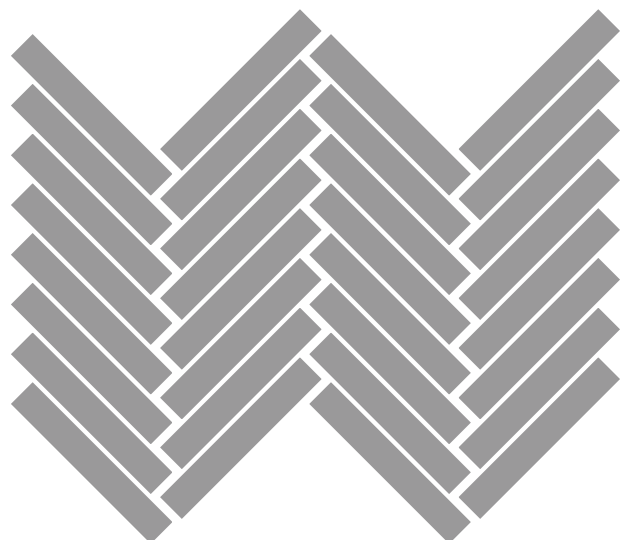


2-Color Herringbone

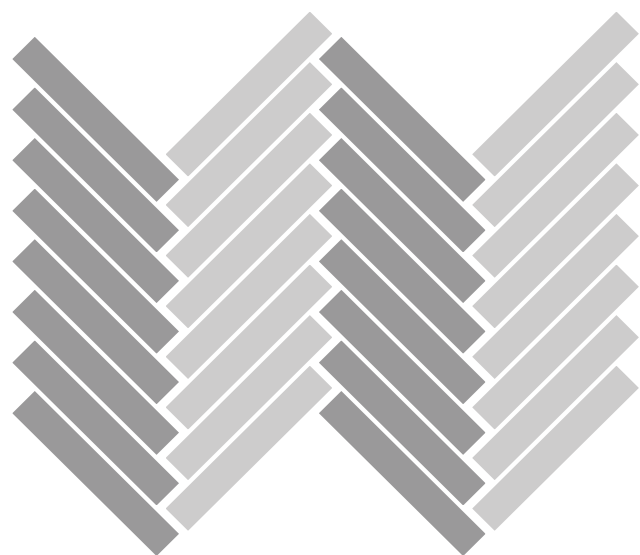


2-Color Herringbone




Checkerboard

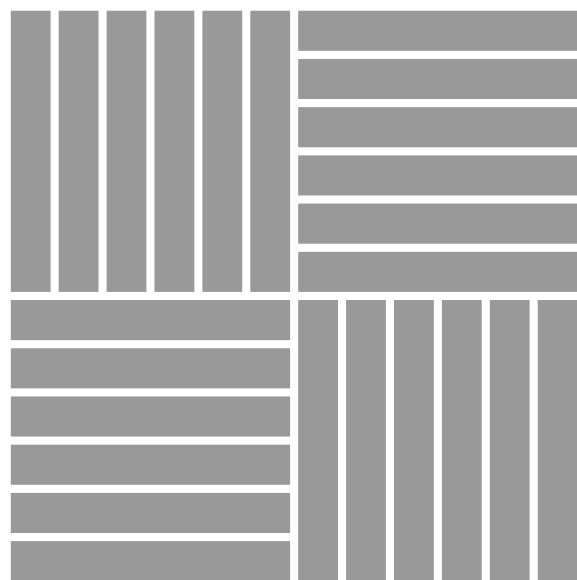


2-Color Checkerboard

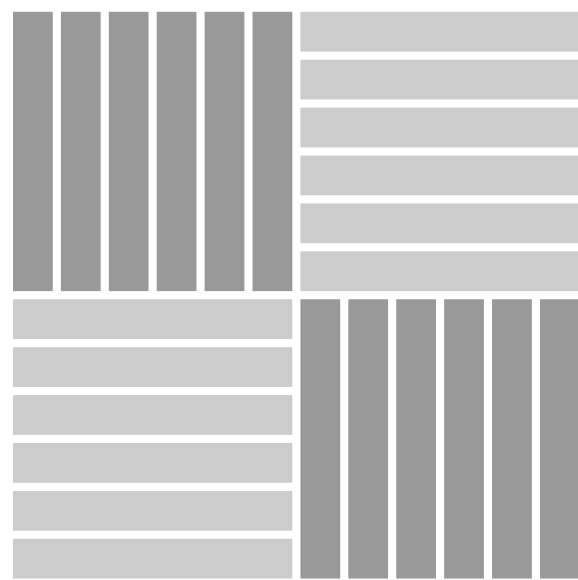

2-Color Checkerboard

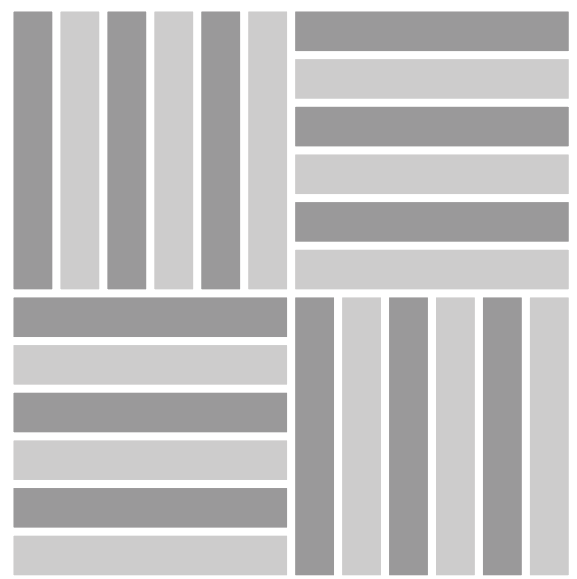

2-Color Checkerboard

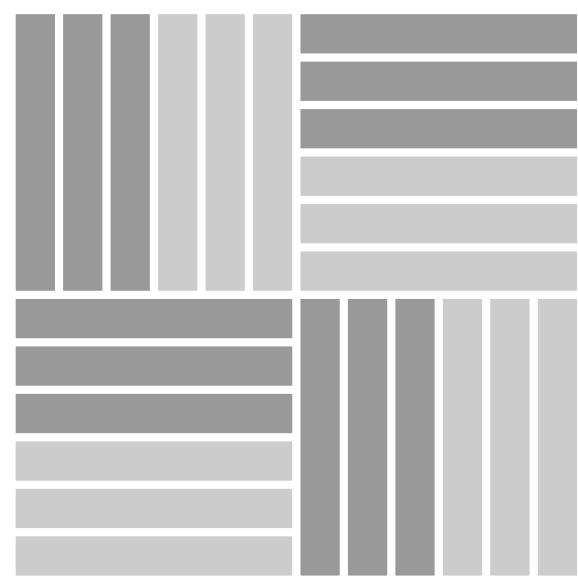

Technical Specifications.





Neoflex Interweave Fitness Flooring is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC laminate or EVA foam.

Property	Standard	Result
Thickness		2.5 mm, 6 mm, 8 mm, 10 mm
Dimensions		1200 mm x 200 mm
Weight		± 4.65 kg/sqm
Hardness	ISO 7619-1:2010	62.1° Shore A
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate
Dynamic Coefficient of Friction	EN 13893:2012	0.7
Light Fastness	ISO 105-B02:2013	7-8 Grade
Residual Indentation	ISO 24343-1:2002	0.18 mm
Dimensional Stability	ISO 23999:2012	0.5%
Flammability	EN 13501-1	Efl (Optional Cfl-s1)
Installation		Stikibak™ or Full-Bond


Standard Thicknesses.

Neoflex Interweave Series is manufactured in 4 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EPDM top layer. 6mm, 8mm and 10mm thicknesses consist of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

			
2.5mm	6 mm	8 mm	10 mm
Designed for Spinning / Cycling Studios Walkways / Circulation	Designed for Cardio Areas Walkways / Circulation	Designed for Selectorized Strength Areas Cardio Areas	Designed for Functional Training Selectorized Strength Areas Yoga & Body / Mind Classes Group Ex Studios

If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Interweave Series can be adhered on top.

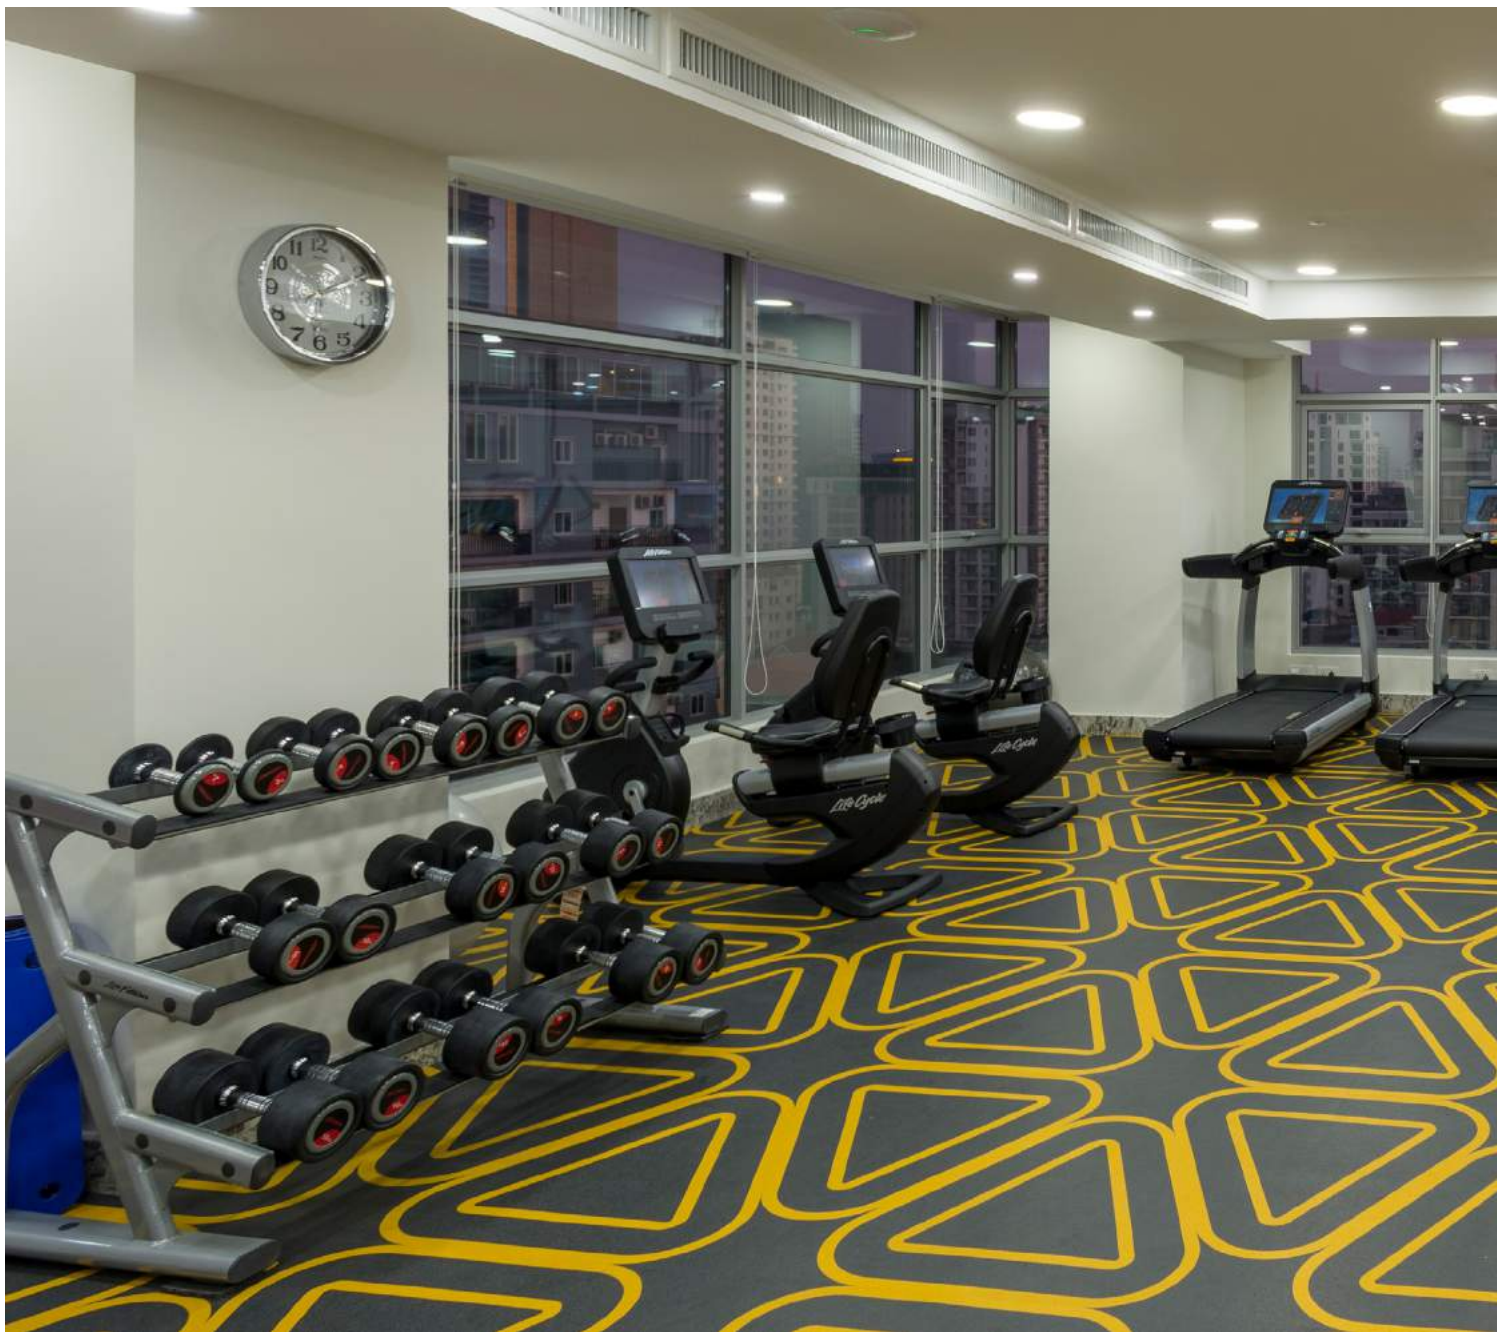



Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Interweave Series.

Rephouse manufactures a complete range of Fitness Flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.



www.rephouse.com



info@rephouse.com



[@rephouse](https://www.facebook.com/rephouse)



[@rephouse](https://www.instagram.com/rephouse)

