


Neoflex™ Designer 600
High Impact Tile

NEOFLEX
FITNESS FLOORING



Performance can take many forms. The most beautiful is presented here.

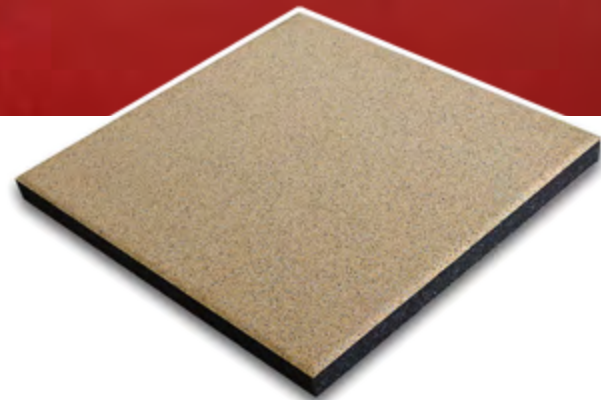

Neoflex™ Designer 600 High Impact Tiles are 20 - 100 mm thick, robust, resilient rubber tiles installed in free weight areas and designed to attenuate the impact of heavy free weights that thinner surfaces cannot achieve.


Neoflex™ Designer 600 High Impact Tiles provide superior sound and vibration insulation ensuring that areas below, around and above the gym remain quiet.

Supplied with a dense synthetic EPDM rubber top layer in mixed colors, and supported by a recycled rubber base layer, Neoflex™ Designer 600 High Impact Tiles achieve a Cfl-s1 Flammability and Smoke Developed Rating according EN 13501-1. Logos, agility & functional zone markings can be in-laid in the surface as well.

| Property | Standard | Result |
|--------------------------|----------------|---------------------|
| Thickness | | 20 - 100 mm |
| Size | | 1010 mm x 1010 mm |
| Shore Hardness | ASTM D 2240 | 60° |
| Resilience | DIN 18032-2 | 40% |
| Tear Strength Top Layer | ASTM D 624 | 1.25 MPa |
| Tear Strength Base Layer | ASTM D 624 | 0.70 MPa |
| Taber Abrasion | ASTM C 504 | 0.66 gr |
| Remaining Indentation | DIN 53960 | 0.05 mm |
| Flammability | EN 13501-1 | C _{fl} -s1 |
| Coefficient of Friction | ASTM D 2047-97 | Dry: 1.03 Wet: 0.97 |




Standard Colors.




633



634




635




636




665




675



696




699




600-005




600-008




600-009




600-010




600-012




600-015



600-019




600-020




600-101




600-102




600-107




600-111




600-112



600-114



600-115



600-116



600-117



600-118



600-119



600-120

A Selection of Standard Colors

For real samples, contact us!