

Neoflex™ Jazz 500
High Impact Tile

NEOFLEX
FITNESS FLOORING

REPHOUSE



Feel the Difference.

Neoflex™ Jazz 500 High Impact Tiles are 20 - 100 mm thick, robust, resilient rubber tiles installed in free weight areas and designed to attenuate the impact of heavy free weights that thinner surfaces cannot achieve.

Neoflex™ Jazz 500 High Impact Tiles provide superior sound and vibration insulation ensuring that areas below, around and above the gym remain quiet.


Supplied with a dense synthetic EPDM rubber top layer in flecked colors, and supported by a recycled rubber base layer, Neoflex™ Jazz 500 High Impact Tiles achieve a Cfl-s1 Flammability and Smoke Developed Rating according to EN 13501-1. Logos, agility & functional zone markings can be in-laid in the surface as well.

Property	Standard	Result
Thickness		20 - 100 mm
Size		505 mm x 505 mm 605 mm x 605 mm 1010 mm x 1010 mm
Shore Hardness	ASTM D 2240	60°
Resilience	DIN 18032-2	40%
Tear Strength Top Layer	ASTM D 624	1.25 MPa
Tear Strength Base Layer	ASTM D 624	0.70 MPa
Taber Abrasion	ASTM C 504	0.66 gr
Remaining Indentation	DIN 53960	0.05 mm
Flammability	EN 13501-1	C _{fl} -s1
Coefficient of Friction	ASTM D 2047-97	Dry: 1.03 Wet: 0.97


WWW.REPHOUSE.COM




Standard Colors

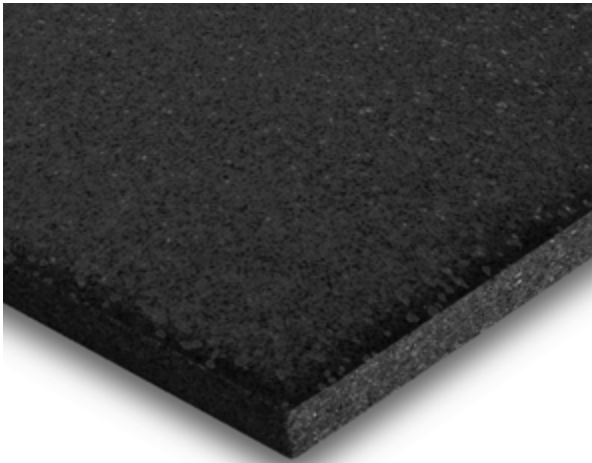


500NV Black Fleck

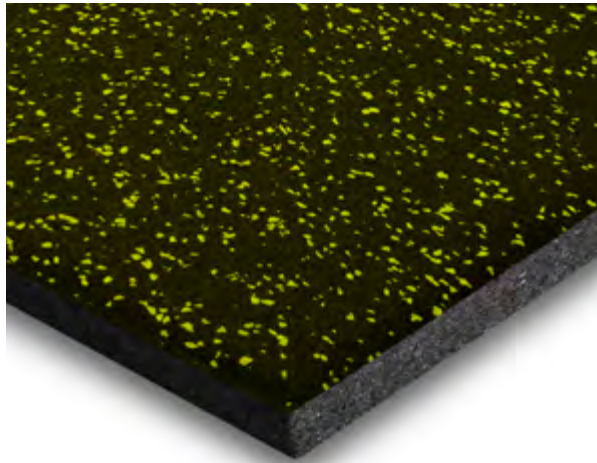


503NV Yellow Fleck

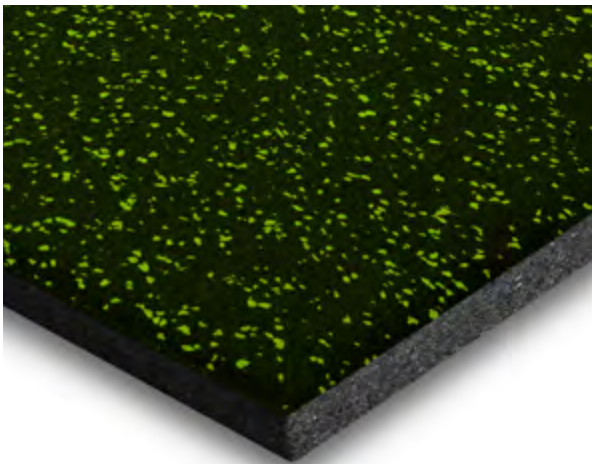


504NV Green Fleck

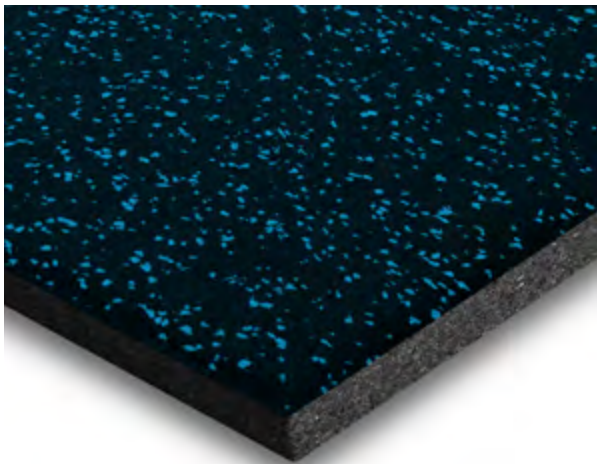

519NV Blue Fleck

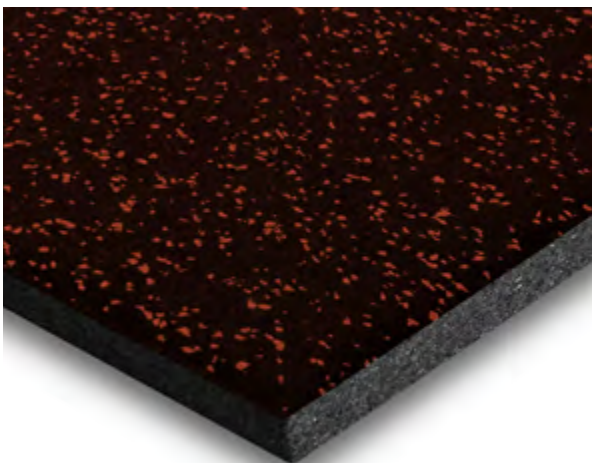

553NV Red Fleck

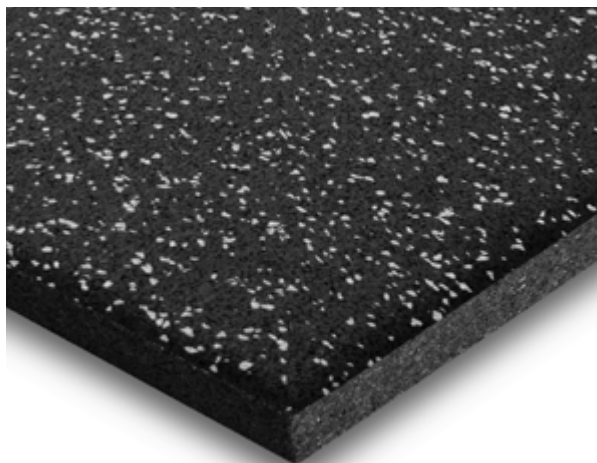

554NV Gray Fleck

Our Standard Colors
For real samples, contact us!