



Neoflex™ Jazz 700  
High Impact Tile

**NEOFLEX**  
FITNESS FLOORING


**REPHOUSE**

## Transform any floor to your taste.

Neoflex™ Jazz 700 High Impact Tiles are 20 - 100 mm thick, robust, resilient rubber tiles installed in free weight areas and designed to attenuate the impact of heavy free weights that thinner surfaces cannot achieve.

Neoflex™ Jazz 700 High Impact Tiles provide superior sound and vibration insulation ensuring that areas below, around and above the gym remain quiet.

Supplied with a dense synthetic EPDM rubber top layer in mixed colors, and supported by a recycled rubber base layer, Neoflex™ Jazz 700 High Impact Tiles achieve a Cfl-s1 Flammability and Smoke Developed Rating according to EN 13501-1. Logos, agility & functional zone markings can be in-laid in the surface as well.

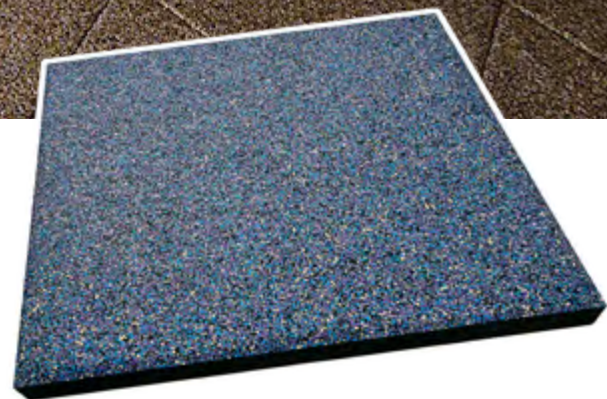

Property	Standard	Result
Thickness		20 - 100 mm
Size		1010 mm x 1010 mm
Shore Hardness	ASTM D 2240	60°
Resilience	DIN 18032-2	40%
Tear Strength Top Layer	ASTM D 624	1.25 MPa
Tear Strength Base Layer	ASTM D 624	0.70 MPa
Taber Abrasion	ASTM C 504	0.66 gr
Remaining Indentation	DIN 53960	0.05 mm
Flammability	EN 13501-1	C <sub>fl</sub> -s1
Coefficient of Friction	ASTM D 2047-97	Dry: 1.03 Wet: 0.97

[WWW.REPHOUSE.COM](http://WWW.REPHOUSE.COM)







## Standard Colors.




701




701B



702




704




711



716




720



723







740



742



744



749




750



755



757




768




776



783



700-001




700-002



700-003




700-004




700-005




700-006




700-007



700-008



700-009



700-010

# A Selection of Standard Colors

For real samples, contact us!